

2018
IRC - IBC

2006
IECC

CALL TWO WORKING DAYS BEFORE YOU DIG
1-800-STAKE-IT (1-800-782-5348)
YAVAPAI COUNTY

2018 IRC R311.3 There shall be a floor or landing on each side of the exterior door. The width of the landing shall not be less than the door served with a minimum distance of 36" measured in the direction traveled.

The inspector may require further clarification on stamped plans. This may include, but not limited to a special inspection and /or a cross section detail stamped and signed by the Designer/Architect/Engineer of record.



*PARCEL:	
*OWNER/APPLICANT:	
PERMIT #:	
PROJECT:	HOME OF MY OWN - 3 BED RIGHT (2024 PLANS)

* Information required to be filled out by the applicant.

CAUTION
Yavapai County permitted building plans do not relieve the Owners or General Contractor from their responsibilities to conform to all adopted building codes. Every effort has been made to provide a thorough plan review, however plans may contain irregularities. If plans do not contain the proper information or details the Owner/General Contractor Shall Not proceed with the project until the issue has been resolved through Yavapai County and any professional involved in the project

Per 2018 IRCR309.1, R309.2, and IBC 406.3.3: Garage/ carport surfaces used for parking of vehicles shall be sloped to drain liquids to the main vehicle entry doorway or an approved drain

Effective April 20, 2006, Fully shielded fixtures are required for all exterior lamps

The mechanical equipment, design and system have been reviewed for the basic design ONLY. The HVAC contractor shall review the plans/ calculations to assure the design is adequate and complies with all applicable codes and installation

Yavapai County Ordinance, Section 112.6 Drainage across Property Lines.
Drainage across property lines shall not exceed that which existed prior to grading. Excess or concentrated drainage shall be contained on site or directed to an approved drainage facility. Erosion of the ground in the area of discharge shall be prevented by installation of non-erosive down-drains or other devices.

THE ENGINEERED GEOTECHNICAL REPORT IS A PART OF THE PERMITTED DOCUMENTS, AND SHALL BE ONSITE AT ALL TIMES WITH THE PERMITTED PLANS.

Per Article 210.12 of the 2017 NEC
Arc fault circuit interupters are required

THE GAS PIPING INSTALLER SHALL VERIFY THE SYSTEM IS OF SUCH SIZE FOR THE MAXIMUM DEMAND AND TO MEET EACH APPLIANCE INLET AT NOT LESS THAN THE MINIMUM SUPPLY PRESSURE REQUIRED

THIRD PARTY SPECIAL INSPECTIONS REQUIRED:
(Third party special inspections are not in lieu of required building inspections.)

- The following items require special inspections:
- SOILS CONDITION
 - SOILS COMPACTION
 - BOTTOM OF FOOTING COMPACTION
 - AND OTHER INSPECTIONS REQUIRED BY THE GEOTECHNICAL ENGINEER.

YES
☒

Reports to be supplied to the Building Inspector

It is imperative that the owner /contractor print ALL permit documents from the online portal before inspection.

CAUTION:
Areas within Yavapai County are likely to have expansive, compressible, shifting or other unknown soils conditions. The building official may require a soils test to determine the soils characteristic at a particular location.

Applicant acknowledges that plans stamped by a registrant will not be fully reviewed by staff and that approvals are contingent upon favorable field inspections. Should conditions in the field prove non-conductive to code requirements, significant delays may be realized. Applicant attests that the sealed plans are in compliance with all applicable codes and ordinances

A separate permit for alternative electric source is required. The alternative electric source permit will need to be issued and finalized before a building final can be obtained

Foam spray shall comply with the ES Reports and applicable codes. It is the responsibility of the owner and/or contractor(s) to review reports and understand requirements before application. Ignition/thermal barrier is required unless otherwise exempt. Failure to comply may cause additional cost to the owner/contractor(s).

GENERAL GRADING NOTES:
Where the lot line walls, slopes, or other physical barriers prohibit 6" of fall within 10', drains or swales shall be provided to insure drainage away from the structure.
MAINTAIN MINIMUM 2:1 SLOPE
The faces of cut and fill slopes shall be prepared and maintained to control against erosion. The protection for the slopes shall be installed as soon as practicable and prior to requesting final approval.
NO GRADING WITHIN 2' OF PROPERTY LINES



To avoid construction delays and added construction fees
Contact APS BEFORE you start construction;
APS Prescott Office: 928-443-6797; Prescottcontrol@aps.com
APS Cottonwood Office: 928-646-8502; Verdecontrol@aps.com
APS Wickenburg Office: 602-371-6200; Wickenburgcontrol@aps.com

The property owner shall be responsible to verify fire sprinkler requirements with the governing fire district

Provide at least one window or exterior door approved for emergency escape or rescue for every room used for sleeping purposes. 2018 IRC R310.1

IMPORTANT!
Footings will not be inspected until the property corners are properly pinned, flagged and easily identifiable to the building inspector.

Interconnected smoke detectors are required for this project per 2018 IRC R314.3.1. Each sleeping room, outside each sleeping room and on each floor level.

APPROVAL IS SUBJECT TO FIELD INSPECTION AND COMPLIANCE WITH ALL RELEVANT CODES, LAWS AND ORDINANCES

RAIN GUTTERS & DOWNSPOUTS ARE REQUIRED

Positive drainage away from the structure is required. Refer to the geotechnical report for an additional requirements

Reviewed for
Design Criteria Only

No slab grade or floor framing inspections will be conducted without compaction reports.

Slab insulation shall be approved for the under slab application. Provide an ES Report and manufacturer's specifications if not using the pre-approved products below:
1. Extruded polystyrene insulation Dow square edge (Blue)
2. Extruded polystyrene Owen corning Foamular 250 (Pink)

Truss calculations to be on site at the time of frame inspection

Per 2018 YCABC Ordinance 2014-1 Section 110.3.4: Pre-slab inspections are required

BIG
STAMP

REVIEWED FOR DESIGN
CRITERIA ONLY

SEE ATTACHED COVER SHEET FOR ALL
STAMPS. IT IS THE RESPONSIBILITY OF THE
OWNER/APPLICANT TO REVIEW AND
ACKNOWLEDGE APPLICABLE STAMPS.

BOARD OF SUPERVISORS

CRAIG BROWN, CHAIRMAN – DISTRICT 4
DONNA G. MICHAELS, Ph.D., VICE CHAIR – DISTRICT 3
HARRY B. OBERG, MEMBER – DISTRICT 1
JAMES GREGORY, MEMBER – DISTRICT 2
MARY MALLORY, MEMBER – DISTRICT 5

PROPERTY OF YAVAPAI COUNTY, AZ



DEVELOPMENT SERVICES
JEREMY DYE, DIRECTOR
MARK LUSSON, ASSISTANT DIRECTOR
WARREN COLVIN, CHIEF BUILDING OFFICIAL

HOME OF MY OWN
Phase Two
Single-Family Housing
THREE BEDROOM / TWO BATH - RIGHT PARKING
for

YAVAPAI COUNTY, ARIZONA
1015 Fair Street
Prescott, Arizona

INDEX TO DRAWINGS

CS	COVER SHEET W/ PROJECT INFORMATION
A-1.0	FLOOR PLAN / OPENING SCHEDULES (Garage option)
A-1.1	FLOOR PLAN / OPENING SCHEDULES (Carport option)
A-2.0	FOUNDATION PLANS
A-3.0	ROOF FRAMING PLAN (Garage option)
A-3.1	ROOF FRAMING PLAN (Carport option)
A-4.0	BRACE WALL PLAN/CALCULATIONS (Garage option)
A-4.1	BRACE WALL PLAN/CALCULATIONS (Carport option)
A-5.0	EXTERIOR ELEVATIONS
A-6.0	BUILDING SECTIONS
A-7.0	DETAILS
M-1.0	MECHANICAL (FAU ABOVE HABITABLE AREA)
M-1.1	MECHANICAL (FAU ABOVE GARAGE/CARPORT)
E-1.0	ELECTRICAL

PROJECT INFORMATION

ALL WORK SHALL CONFORM TO ALL YAVAPAI COUNTY
ADOPTED CODES, ORDINANCES AND POLICIES,
INCLUDING BUT NOT LIMITED TO THE FOLLOWING:
2018 INTERNATIONAL RESIDENTIAL CODE (IRC)
2018 INTERNATIONAL PLUMBING CODE (IPC)
2018 INTERNATIONAL MECHANICAL CODE (IMC)
2017 NATIONAL ELECTRIC CODE (NEC)
2006 INTERNATIONAL ENERGY CONSERVATION CODE (IECC)

LIVABLE: 1,613 SQ. FT.
CARPORT/ALT. GARAGE: 483 SQ. FT.
COVERED ENTRY: 164 SQ. FT.
COVERED PATIO: 113 SQ. FT.
TOTAL UNDER ROOF: 2,373 SQ. FT.

OCCUPANCY: R-3 (Single-Family Residential)
CONSTRUCTION TYPE: V-B

THESE HOMES WERE DESIGNED FOR A MAXIMUM ELEVATION OF 6200 FEET
(40 LB. SNOW LOAD). THEY WERE NOT DESIGNED FOR A TILE ROOF.

GENERAL NOTES

1. DUE TO REPROGRAPHIC PROCESS, THESE PLANS MAY NOT BE
ACCURATE TO SCALE. DIMENSIONS ARE NOT TO BE
SCALED FROM THE WORKING DRAWINGS.
2. BEFORE ORDERING ANY MATERIALS OR STARTING ANY WORK,
CONTRACTORS SHALL VERIFY ALL MEASUREMENTS AND EXISTING
CONDITIONS AT THE SITE AND SHALL BE RESPONSIBLE FOR THE
CORRECTNESS OF THE SAME. ANY DEVIATION AND/OR UNSAFE OR
UNREGULATED CONDITIONS SHALL BE BROUGHT TO THE ATTENTION
OF YAVAPAI COUNTY DEVELOPMENT SERVICES.
3. GENERAL CONTRACTOR TO VERIFY AND LOCATE ALL UTILITY STUB
OUTS AND MAINS BEFORE BEGINNING CONSTRUCTION OF PROJECT.
4. GENERAL CONTRACTOR TO VERIFY THE REMOVAL AND/OR REPLANTING
OF LANDSCAPE IF THE CONDITION OCCURS OVER THE PROJECT SITE.
5. DAMAGE TO SITE, UTILITIES, OR NEWLY BUILT IMPROVEMENTS, NOT
DESIGNED FOR REMOVAL, SHALL BE THE RESPONSIBILITY OF THE GENERAL
CONTRACTOR INVOLVED, AND SHALL BE REPAIRED OR REPLACED AT THE
EXPENSE OF THE SAME.
6. VERIFY UNIFORMITY OF ALL FRAMING SO AS TO CREATE A SMOOTH,
REGULAR FINISH WITH NO IRREGULARITIES.
7. IT IS THE RESPONSIBILITY OF THE GENRAL CONTRACTOR TO THOROUGHLY REVIEW THE
PLANS AND TO NOTIFY YAVAPAI COUNTY DEVELOPMENT SERVICES OF ANY DISCREPANCIES.
YAVAPAI COUNTY, NOR THE ARCHITECT-OF-RECORD, WILL NOT BE RESPONSIBLE FOR
MATERIALS IMPROPERLY ORDERED OR INSTALLED.
8. FAILURE BY THE GENERAL CONTRACTOR, OR SUB-CONTRACTORS, TO AQUAINT THEM-
SELVES WITH ALL AVAILABLE INFORMATION CONCERNING THIS PROJECT
SHALL NOT RELIEVE THEM OF THE RESPONSIBILITY TO PERFORM THEIR
WORK PROPERLY.
9. APPROVAL OF ALL CONSTRUCTION IS SUBJECT TO FIELD VERIFICATION
BY YAVAPAI COUNTY PERSONELL.
10. EVERY SLEEPING ROOM SHALL HAVE AT LEAST ONE (1) OPERATING WINDOW, OR DOOR,
FOR EMERGENCY EGRESS, OPEN DIRECTLY TO A STREET, ALLEY, OR YARD.

Job no. : 3BD/2BA RIGHT
Date : 05/24/2024
Drawn by: MFR
Chk'd by: MFR
Scale : AS NOTED
Revisions:

This design is the property of Mark Rogers,
Architect, PLLC, and the drawings are the property of
Yavapai County Government, and are not to be reproduced, or
copied in whole or in part. It is only to be used
for the project and site specifically identified herein
and is not to be used on any other project.
It is to be returned upon request.
Scales as stated hereon are valid on the original
drawing only. Contractor shall carefully review all
dimensions and conditions shown hereon and at
once report to the Architect any error, inconsis-
tancy or omission he may discover.



Mark Rogers, Architect, PLLC

761 Highland Circle
Chino Valley, Arizona 86323
Phone: (928) 848-3516
markrogers914@gmail.com

COVER SHEET
PHASE TWO – 3 BDRM / 2 BATH – RIGHT PARKING

YAVAPAI COUNTY, ARIZONA

1015 FAIR STREET
PRESCOTT, ARIZONA

SHEET NO:
CS

PROPERTY OF YAVAPAI COUNTY, AZ

PROPERTY OF YAVAPAI COUNTY, AZ

PROPERTY OF YAVAPAI COUNTY, AZ

REVIEWED FOR DESIGN
CRITERIA ONLY

SEE ATTACHED COVER SHEET FOR ALL
STAMPS. IT IS THE RESPONSIBILITY OF THE
OWNER/APPLICANT TO REVIEW AND
ACKNOWLEDGE APPLICABLE STAMPS.

DOOR SCHEDULE

DR. #	SIZE W.	H.	T.	DOOR TYPE	REMARKS
101	3'-0"	6'-8"	1-3/4"	SOLID-CORE WOOD	
102	2'-6"	6'-8"	1-3/4"	SOLID-CORE WOOD	IF USING GAS WATER HEATER, PROVIDE 12" X 12" VENTS, ONE AT THE TOP, AND BOTTOM OF DOOR
103	3'-0"	6'-8"	1-3/4"	SOLID-CORE WOOD	
104	2'-8"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
105	2'-4"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
106	2'-4"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
107	2'-4"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
108	6'-0"	6'-8"	-	SLIDING GLASS PATIO DOOR	
109	2'-6"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
110	2'-6"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
111	2'-4"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
112	2'-4"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
113	2'-6"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
114	2'-4"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
115	2'-4"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
116	2'-0"	7'-0"	-	OVERHEAD GARAGE DOOR	
118	3'-0"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	

NOTE: WHEN USING DOOR #2 WITH THE ALTERNATE CARPORT, SELF-CLOSING & SELF-LATCHING ARE NOT REQUIRED.

WINDOW SCHEDULE (8' plate height)


WIN.	SIZE	TYPE	REMARKS
A	4040	XO	EGRESS AT BEDROOM
B	3030	XO	
C	3010	XO	
D	2030	SINGLE-HUNG	

WINDOW SCHEDULE (9' plate height)

WIN.	SIZE	TYPE	REMARKS
A	4050	XO	EGRESS AT BEDROOM MUST HAVE MAX. 44" SILL HEIGHT ABOVE FLOOR
B	3030	XO	
C	3010	XO	
D	2030	SINGLE-HUNG	


NOTE: FENESTRATION IN ZONE 2 (ELEVATIONS BELOW 3500 FT.) SHALL HAVE A MAXIMUM U-FACTOR OF 0.75, AND A MAXIMUM FENESTRATION SHGC FACTOR OF 0.40. FENESTRATION IN ZONE 4 (ELEVATIONS 3500 FT. AND ABOVE) SHALL HAVE A MAXIMU U-FACTOR OF 0.40. THE SHGC FACTOR IN ZONE 4 IS NOT APPLICABLE.

PROPERTY OF YAVAPAI COUNTY, AZ

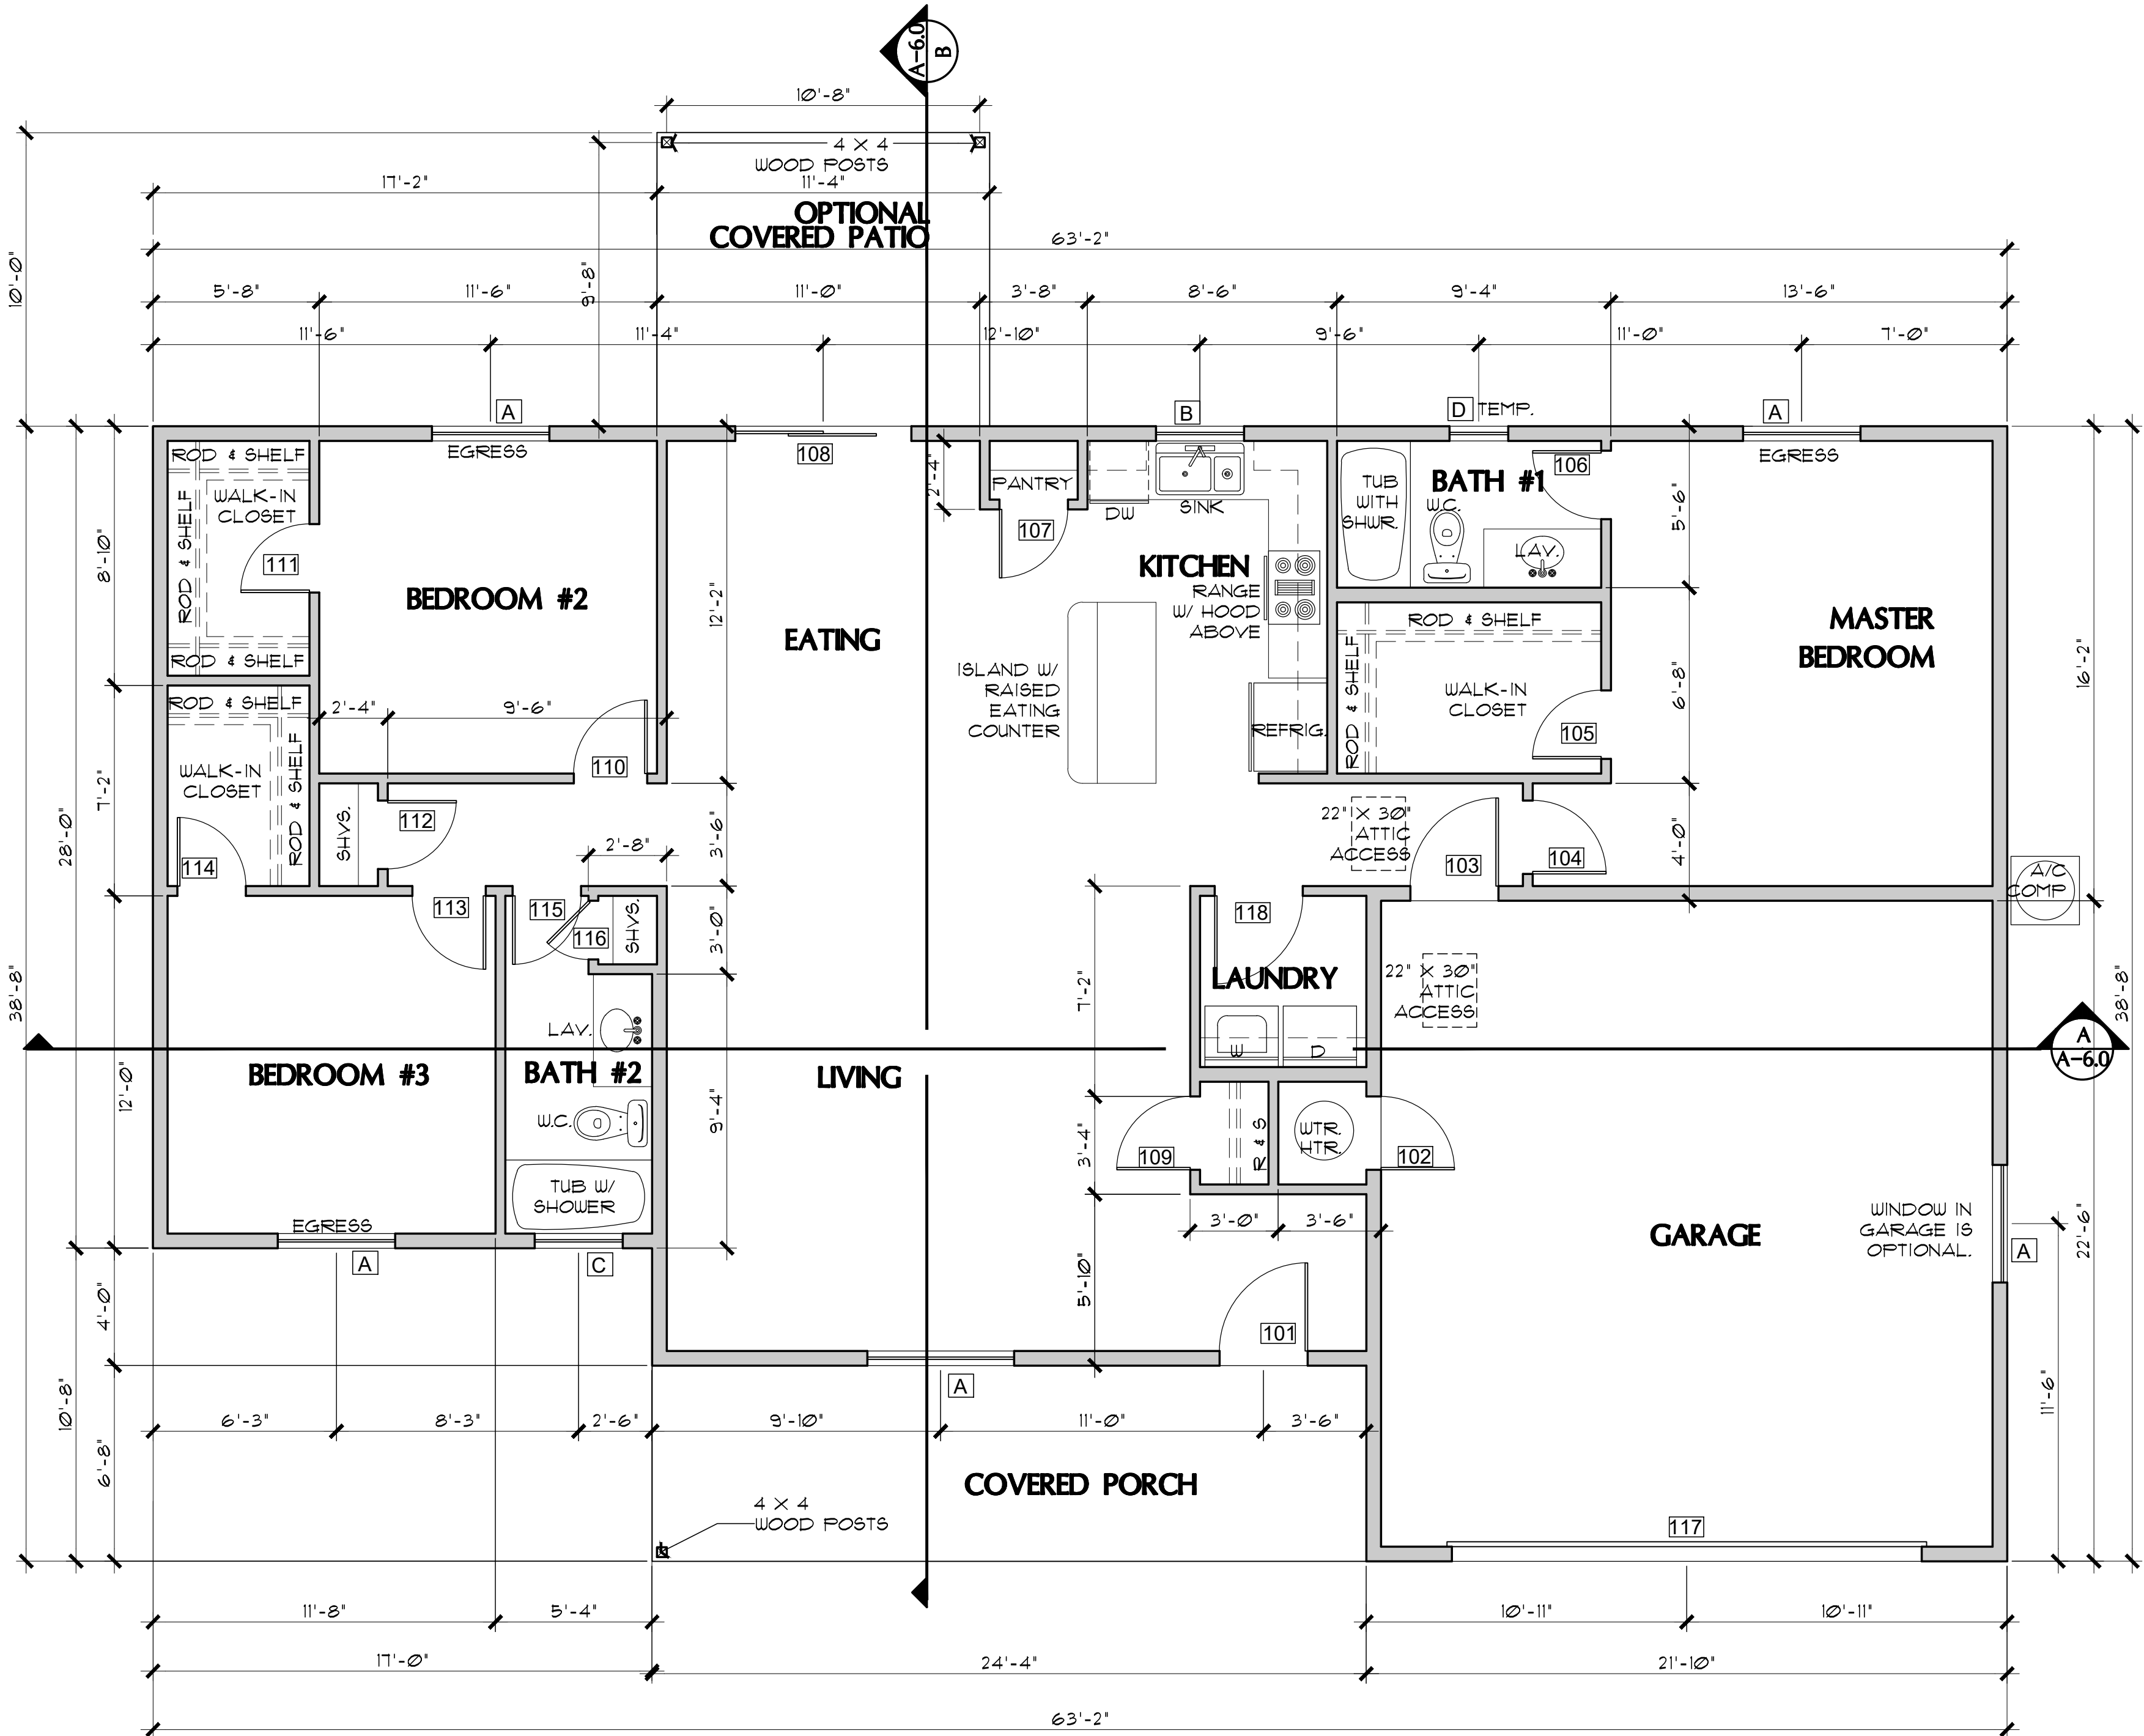

FLOOR PLAN (with Garage option)

SCALE: 1/4" = 1'-0"

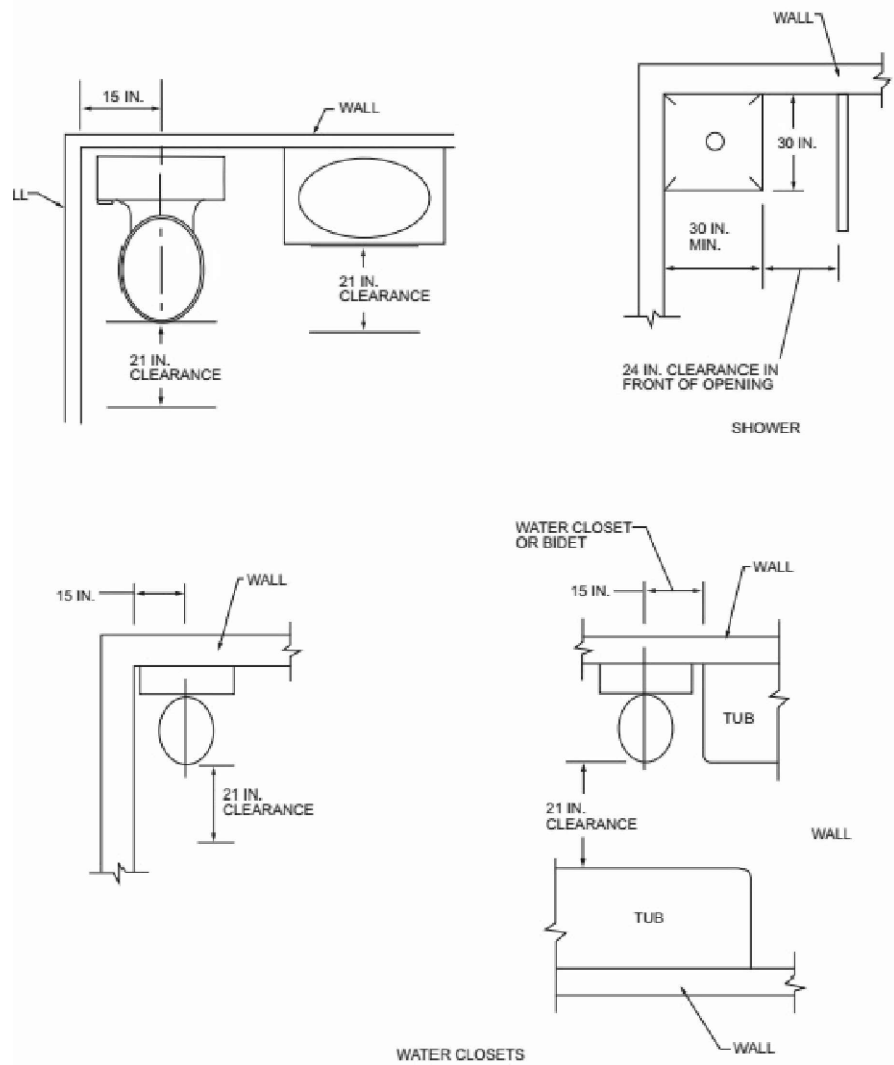

PLUMBING FIXTURE CLEARANCES

NO SCALE

PER IRC FIGURE R307.1

PROPERTY OF YAVAPAI COUNTY, AZ

Job no. : 3BD/2BA RIGHT
Date : 05/24/2024
Drawn by: MFR
Chk'd by: MFR
Scale : AS NOTED
Revisions:

This design is the property of Mark Rogers, Architect, PLLC and the drawings are the property of Yavapai County Government, and are not to be reproduced, or copied in whole or in part. It is only to be used for the project and site specifically identified herein and is not to be used on any other project. It is to be returned upon request.
Scales as stated herein are valid on the original drawing only. Contractor shall carefully review all dimensions and conditions shown herein and at once report to the Architect any error, inconsistency or omission he may discover.



Mark Rogers, Architect, PLLC

♦ ♦ Chino Valley, Arizona 86323
Phone: (928) 848-3516
markrogers914@gmail.com

1015 FAIR STREET
PRESCOTT, ARIZONA

YAVAPAI COUNTY, ARIZONA

PROPERTY OF YAVAPAI COUNTY, AZ

FLOOR PLAN (Garage option)

OPENING SCHEDULES
PHASE TWO - 3 BDRM / 2 BATH - RIGHT PARKING

YAVAPAI COUNTY, ARIZONA

SHEET NO:

A-1.0

REVIEWED FOR DESIGN
CRITERIA ONLY

SEE ATTACHED COVER SHEET FOR ALL
STAMPS. IT IS THE RESPONSIBILITY OF THE
OWNER/APPLICANT TO REVIEW AND
ACKNOWLEDGE APPLICABLE STAMPS.

DOOR SCHEDULE

DR. #	SIZE			DOOR TYPE	REMARKS
	W.	H.	T.		
101	3'-0"	6'-8"	1-3/4"	SOLID-CORE WOOD	
102	2'-6"	6'-8"	1-3/4"	SOLID-CORE WOOD	IF USING GAS WATER HEATER, PROVIDE 12" X 12" VENTS, ONE AT THE TOP, AND BOTTOM OF DOOR
103	3'-0"	6'-8"	1-3/4"	SOLID-CORE WOOD	
104	2'-8"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
105	2'-4"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
106	2'-4"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
107	2'-4"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
108	6'-0"	6'-8"	-	SLIDING GLASS PATIO DOOR	
109	2'-6"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
110	2'-6"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
111	2'-4"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
112	2'-4"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
113	2'-6"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
114	2'-4"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
115	2'-4"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
116	2'-0"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	
117	3'-0"	6'-8"	1-3/8"	INTERIOR HOLLOW CORE	

NOTE: WHEN USING DOOR #2 WITH THE ALTERNATE CARPORT, SELF-CLOSING & SELF-LATCHING ARE NOT REQUIRED.

WINDOW SCHEDULE (8' plate height)


WIN.	SIZE		TYPE	REMARKS
	W.	H.		
A	4040		XO	EGRESS AT BEDROOM
B	3030		XO	
C	3010		XO	
D	2030		SINGLE-HUNG	TEMPERED GLAZING

WINDOW SCHEDULE (9' plate height)

WIN.	SIZE		TYPE	REMARKS
	W.	H.		
A	4050		XO	EGRESS AT BEDROOM MUST HAVE MAX. 44" SILL HEIGHT ABOVE FLOOR
B	3030		XO	
C	3010		XO	
D	2030		SINGLE-HUNG	TEMPERED GLAZING


NOTE: FENESTRATION IN ZONE 2 (ELEVATIONS BELOW 3500 FT.)
SHALL HAVE A MAXIMUM U-FACTOR OF 0.75, AND A
MAXIMUM FENESTRATION SHGC FACTOR OF 0.40.
FENESTRATION IN ZONE 4 (ELEVATIONS 3500 FT. AND ABOVE)
SHALL HAVE A MAXIMU U-FACTOR OF 0.40. THE SHGC
FACTOR IN ZONE 4 IS NOT APPLICABLE.

PROPERTY OF YAVAPAI COUNTY, AZ

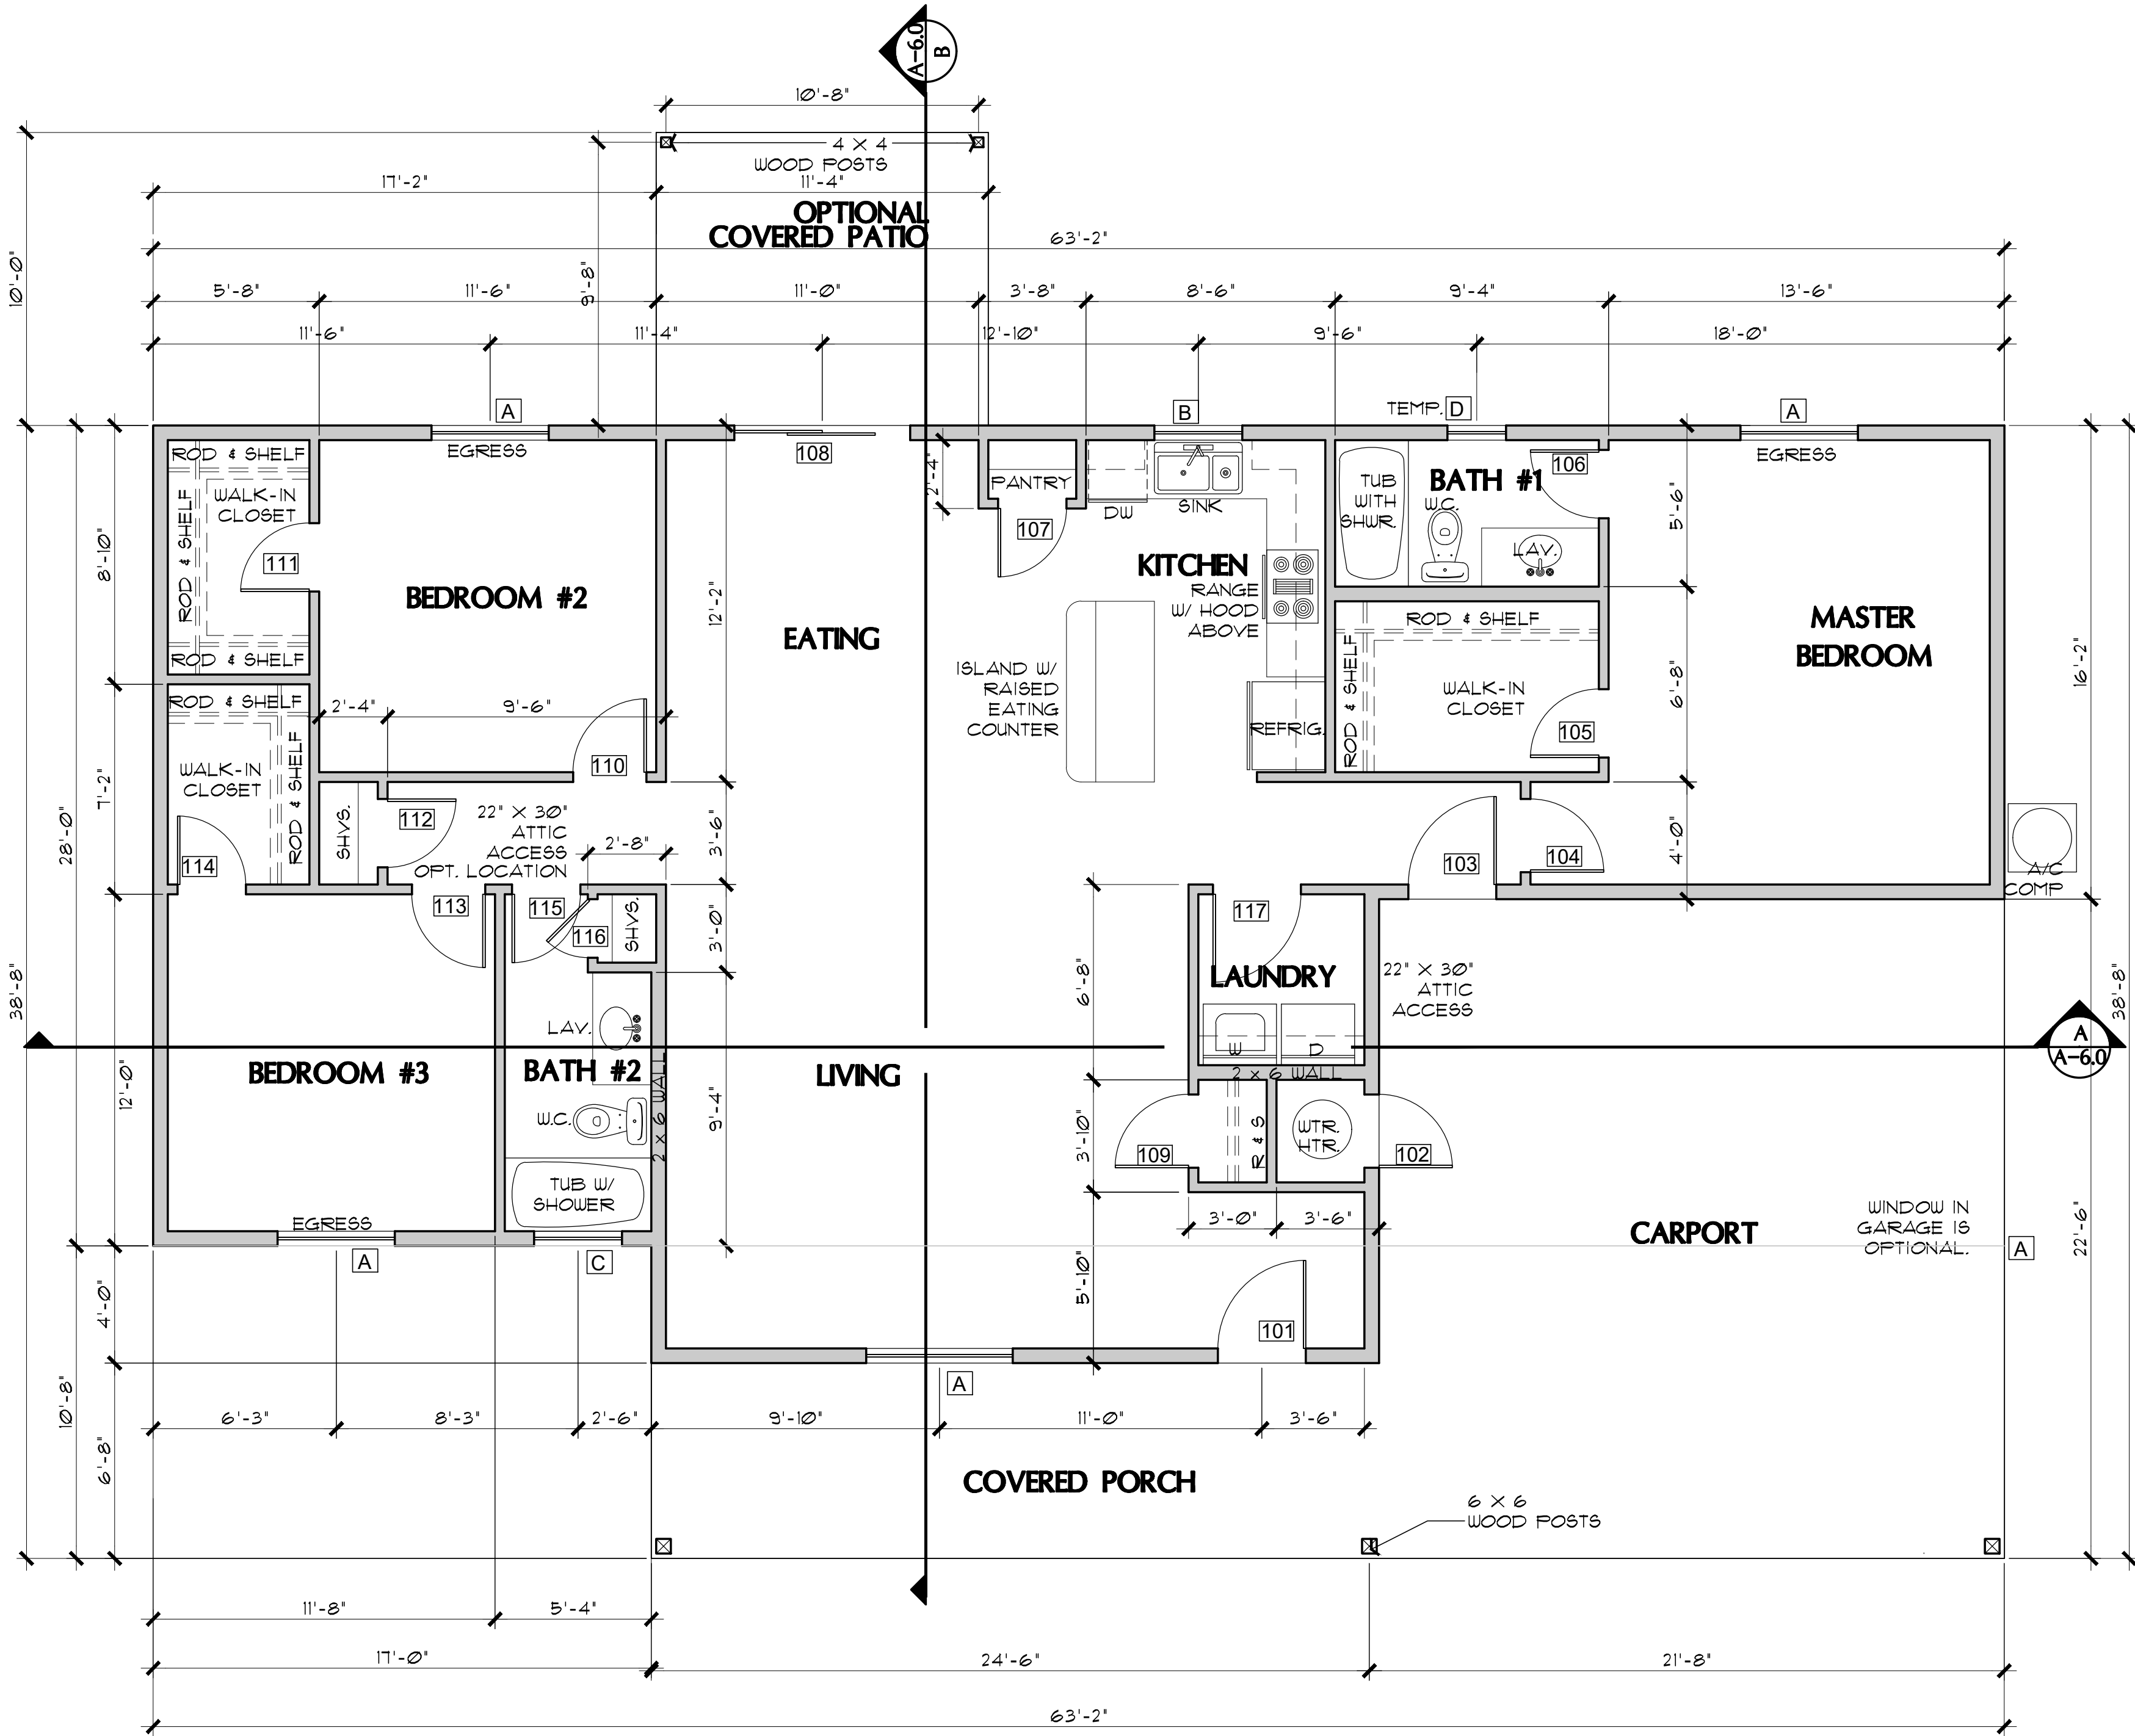

FLOOR PLAN (with Carport option)

SCALE: 1/4" = 1'-0"

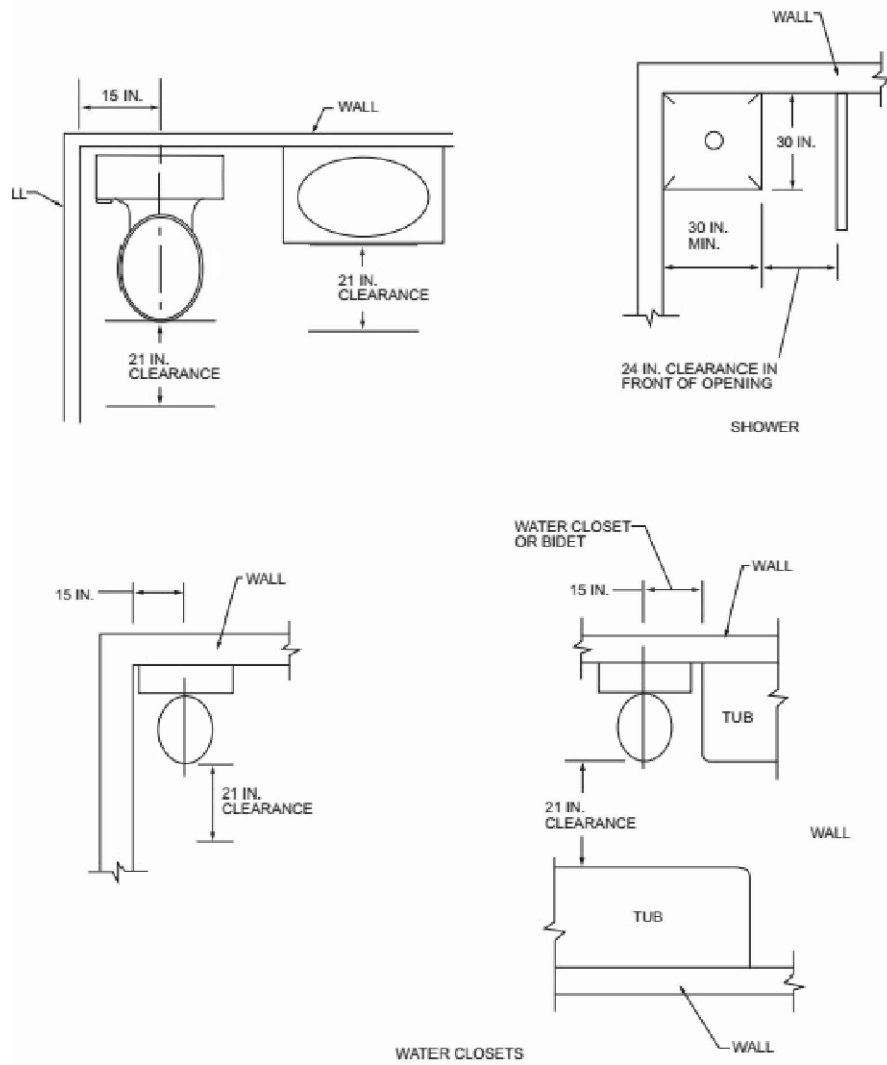

PLUMBING FIXTURE CLEARANCES

NO SCALE

PER IRC FIGURE R301.1

PROPERTY OF YAVAPAI COUNTY, AZ

Job no. : 3BD/2BA RIGHT
Date : 05/24/2024
Drawn by: MFR
Chk'd by: MFR
Scale : AS NOTED
Revisions:

This design is the property of Mark Rogers, Architect, PLLC and the drawings are the property of Yavapai County Government, and are not to be reproduced, or copied in whole or in part. It is only to be used for the project and site specifically identified herein and is not to be used on any other project. It is to be returned upon request.
Scales as stated herein are valid on the original drawing only. Contractor shall carefully review all dimensions and conditions shown herein and at once report to the Architect any error, inconsistency or omission he may discover.



Mark Rogers, Architect, PLLC

761 Highland Circle
Chino Valley, Arizona 86323
Phone: (928) 848-3516
markrogers914@gmail.com

FLOOR PLAN (Carport option)

PHASE TWO - 3 BDRM / 2 BATH - RIGHT PARKING

YAVAPAI COUNTY, ARIZONA

1015 FAIR STREET
PRESCOTT, ARIZONA

SHEET NO:

A-1.1


PROPERTY OF YAVAPAI COUNTY, AZ

PROPERTY OF YAVAPAI COUNTY, AZ

REVIEWED FOR DESIGN
CRITERIA ONLY

SEE ATTACHED COVER SHEET FOR ALL
STAMPS. IT IS THE RESPONSIBILITY OF THE
OWNER/APPLICANT TO REVIEW AND
ACKNOWLEDGE APPLICABLE STAMPS.

PROPERTY OF YAVAPAI COUNTY, AZ

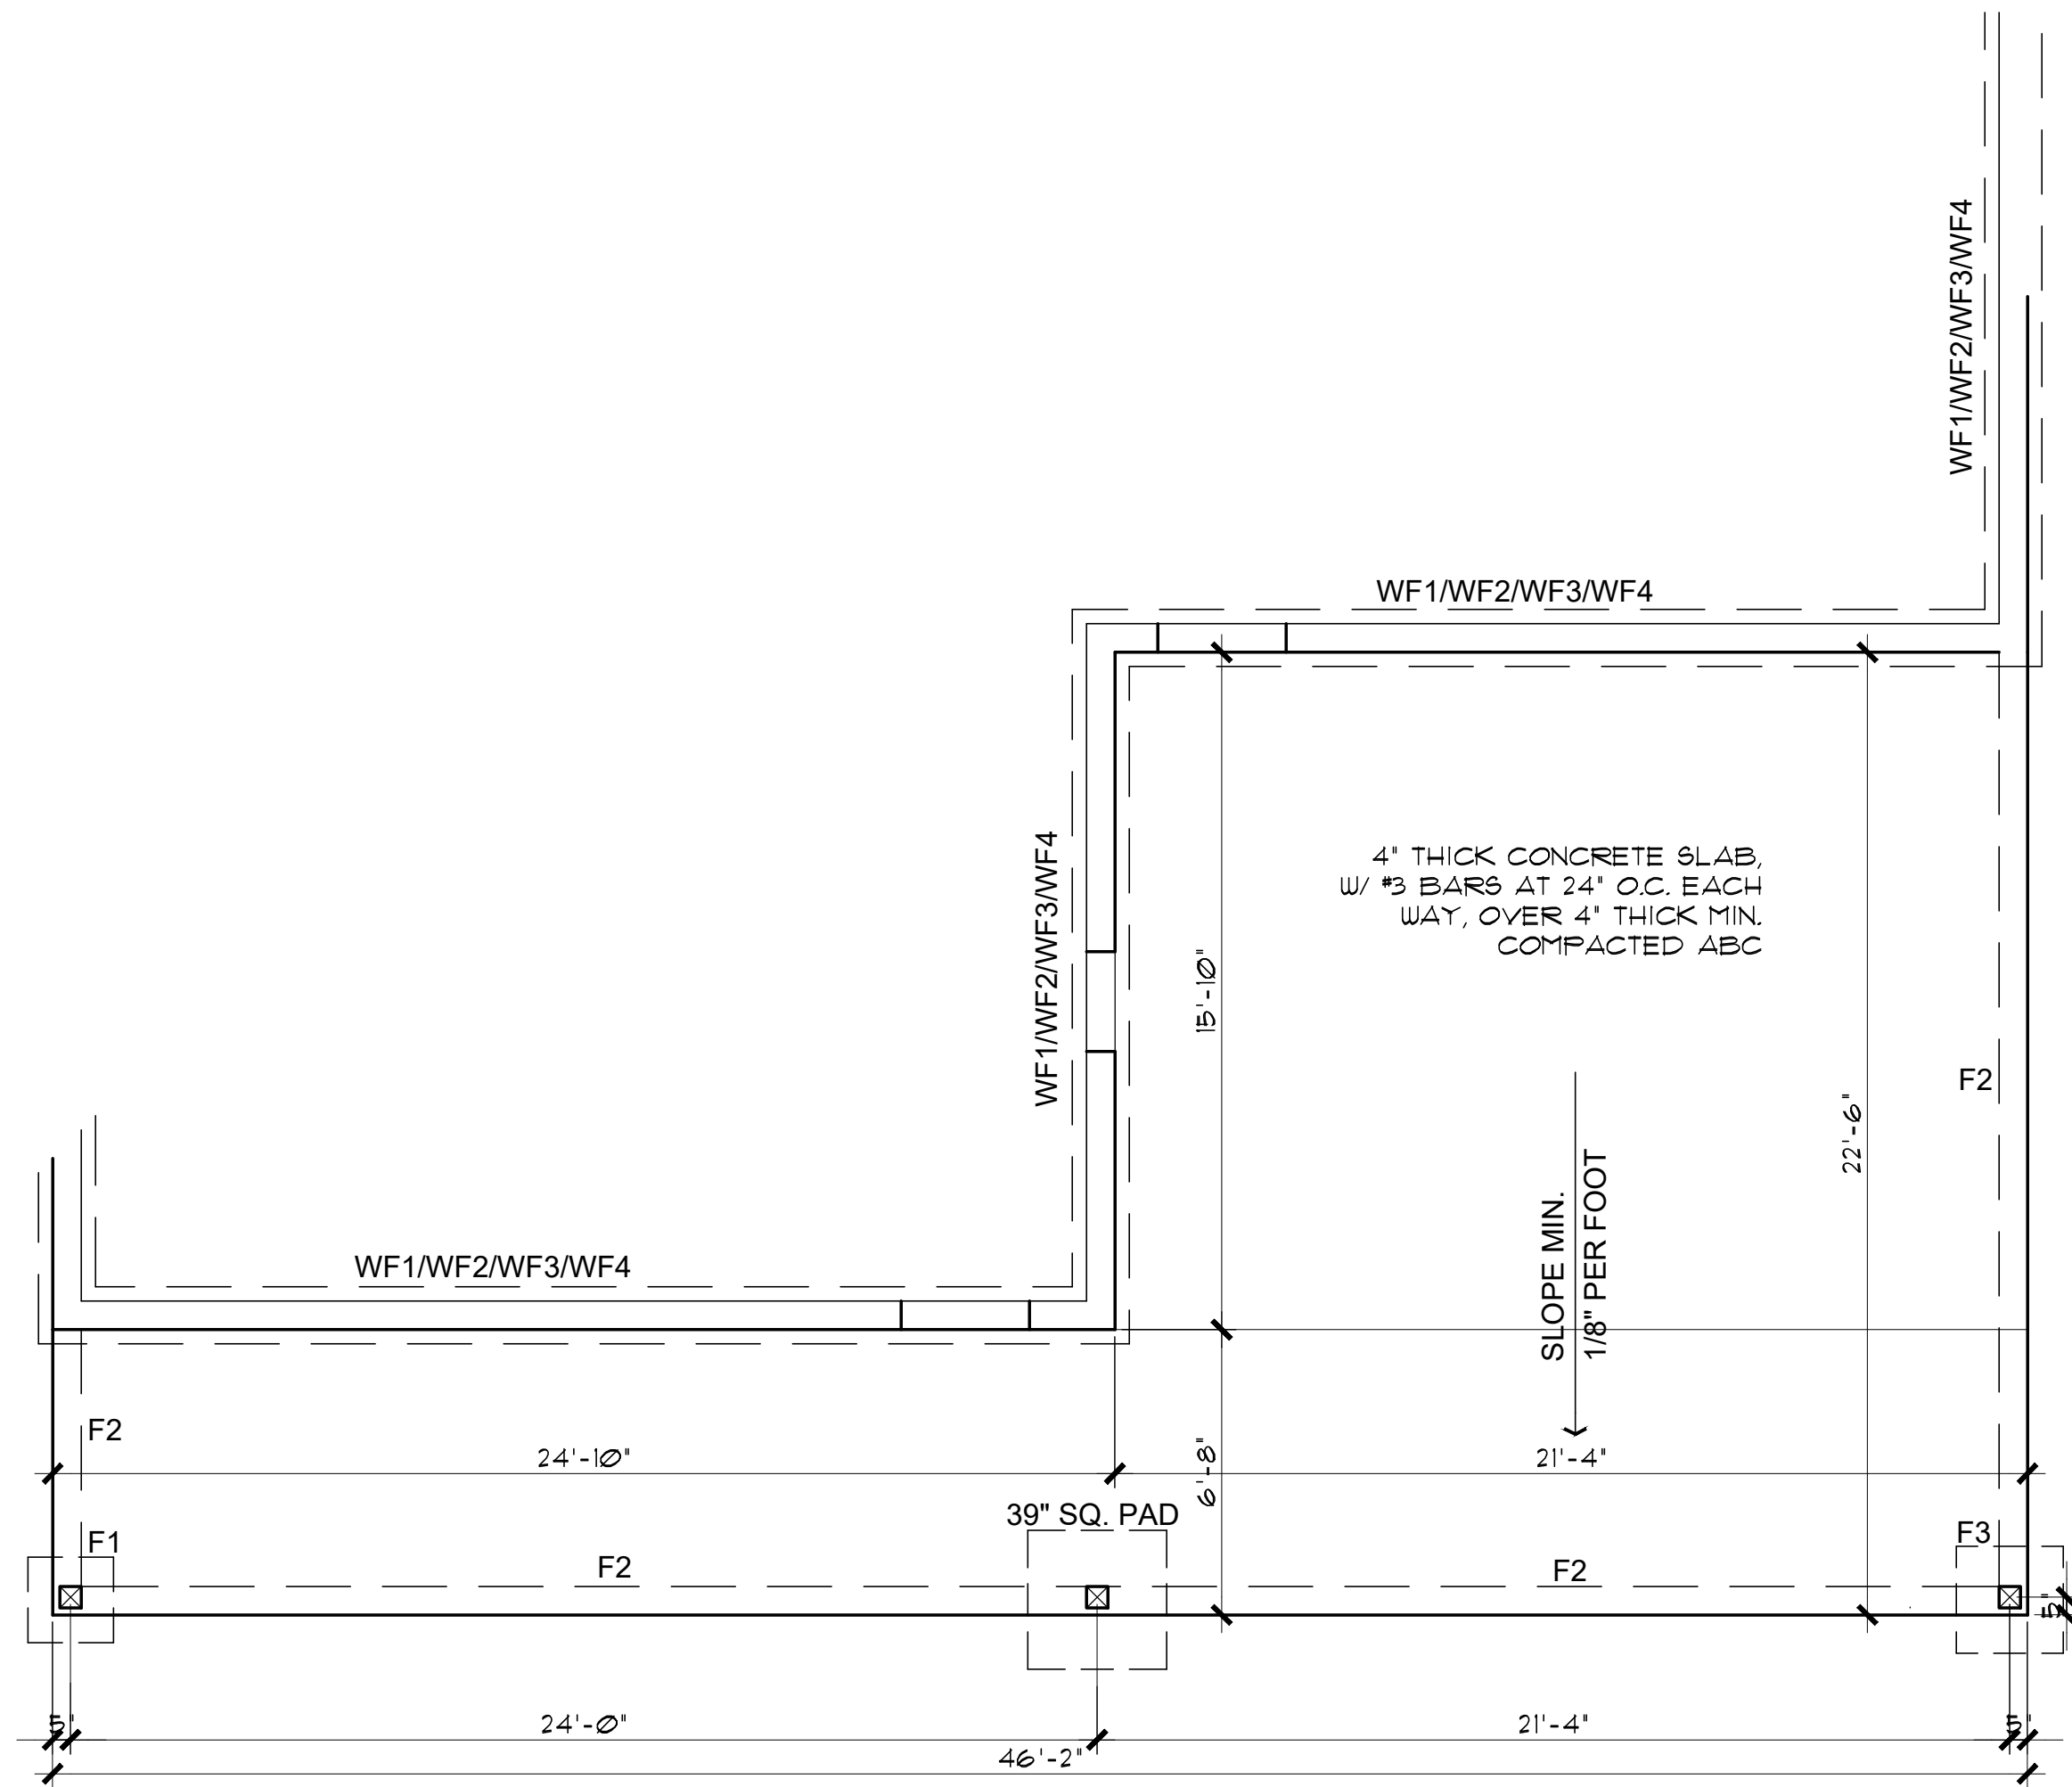


FOUNDATION PLAN (with Carport option)

SCALE: 1/4" = 1'-0"

FOUNDATION NOTES

1. FOOTINGS TO BE A MIN. OF 8" THICK IN 18" MIN. UNDISTURBED SOIL.
2. FOOTINGS AND INTERIOR FLATWORK TO BE MIN. 2500 P.S.I. MIN COMPRESSIVE STRENGTH AT 28 DAYS.
3. FOUNDATION SUPPORTED WOOD TO EXTEND MIN. 6" ABOVE FINISH GRADE
4. FOUNDATION PLATES AND SILLS SHALL BE BOLTED TO FOUNDATION WITH MIN. 1/2" BOLTS 6'-0" O.C., 12" FROM CORNERS AND EMBEDDED 7" INTO FOUNDATION WALL
5. EXTERIOR FLATWORK SLOPE TO BE 1/4" PER FOOT.
6. CONTRACTOR TO EMBED 20' OF #4 G.A. COPPER WIRE IN FOOTING FOR ELECTRICAL SERVICE GROUND.
7. THE GRADE AWAY FROM FOUNDATION WALLS SHALL FALL A MINIMUM OF 6 INCHES WITHIN THE FIRST 10 FEET.
8. ALL EXTERIOR PLATES, LOAD BEARING AND NON LOAD BEARING SHALL BE PRESSURE TREATED, LESS THAN 8" ABOVE GRADE
9. FILL BEING PLACED THAT EXCEEDS 2' WILL REQUIRE A CERTIFIED COMPACTION TEST AND REPORT.

NOTE: THE FOOTINGS SIZE, THICKNESS, AND BOTTOM OF FOOTING DEPTH SHALL BE PER THE GEOTECHNICAL REPORT/ENGINEER'S REQUIREMENTS. THIS SHALL INCLUDE ANY OVER EXCAVATIONS, ENGINEERED PAD REQUIREMENTS, AND/OR A CHANGE IN DEPTH, AND TYPE OF BASE COURSE UNDER THE CONCRETE SLABS.

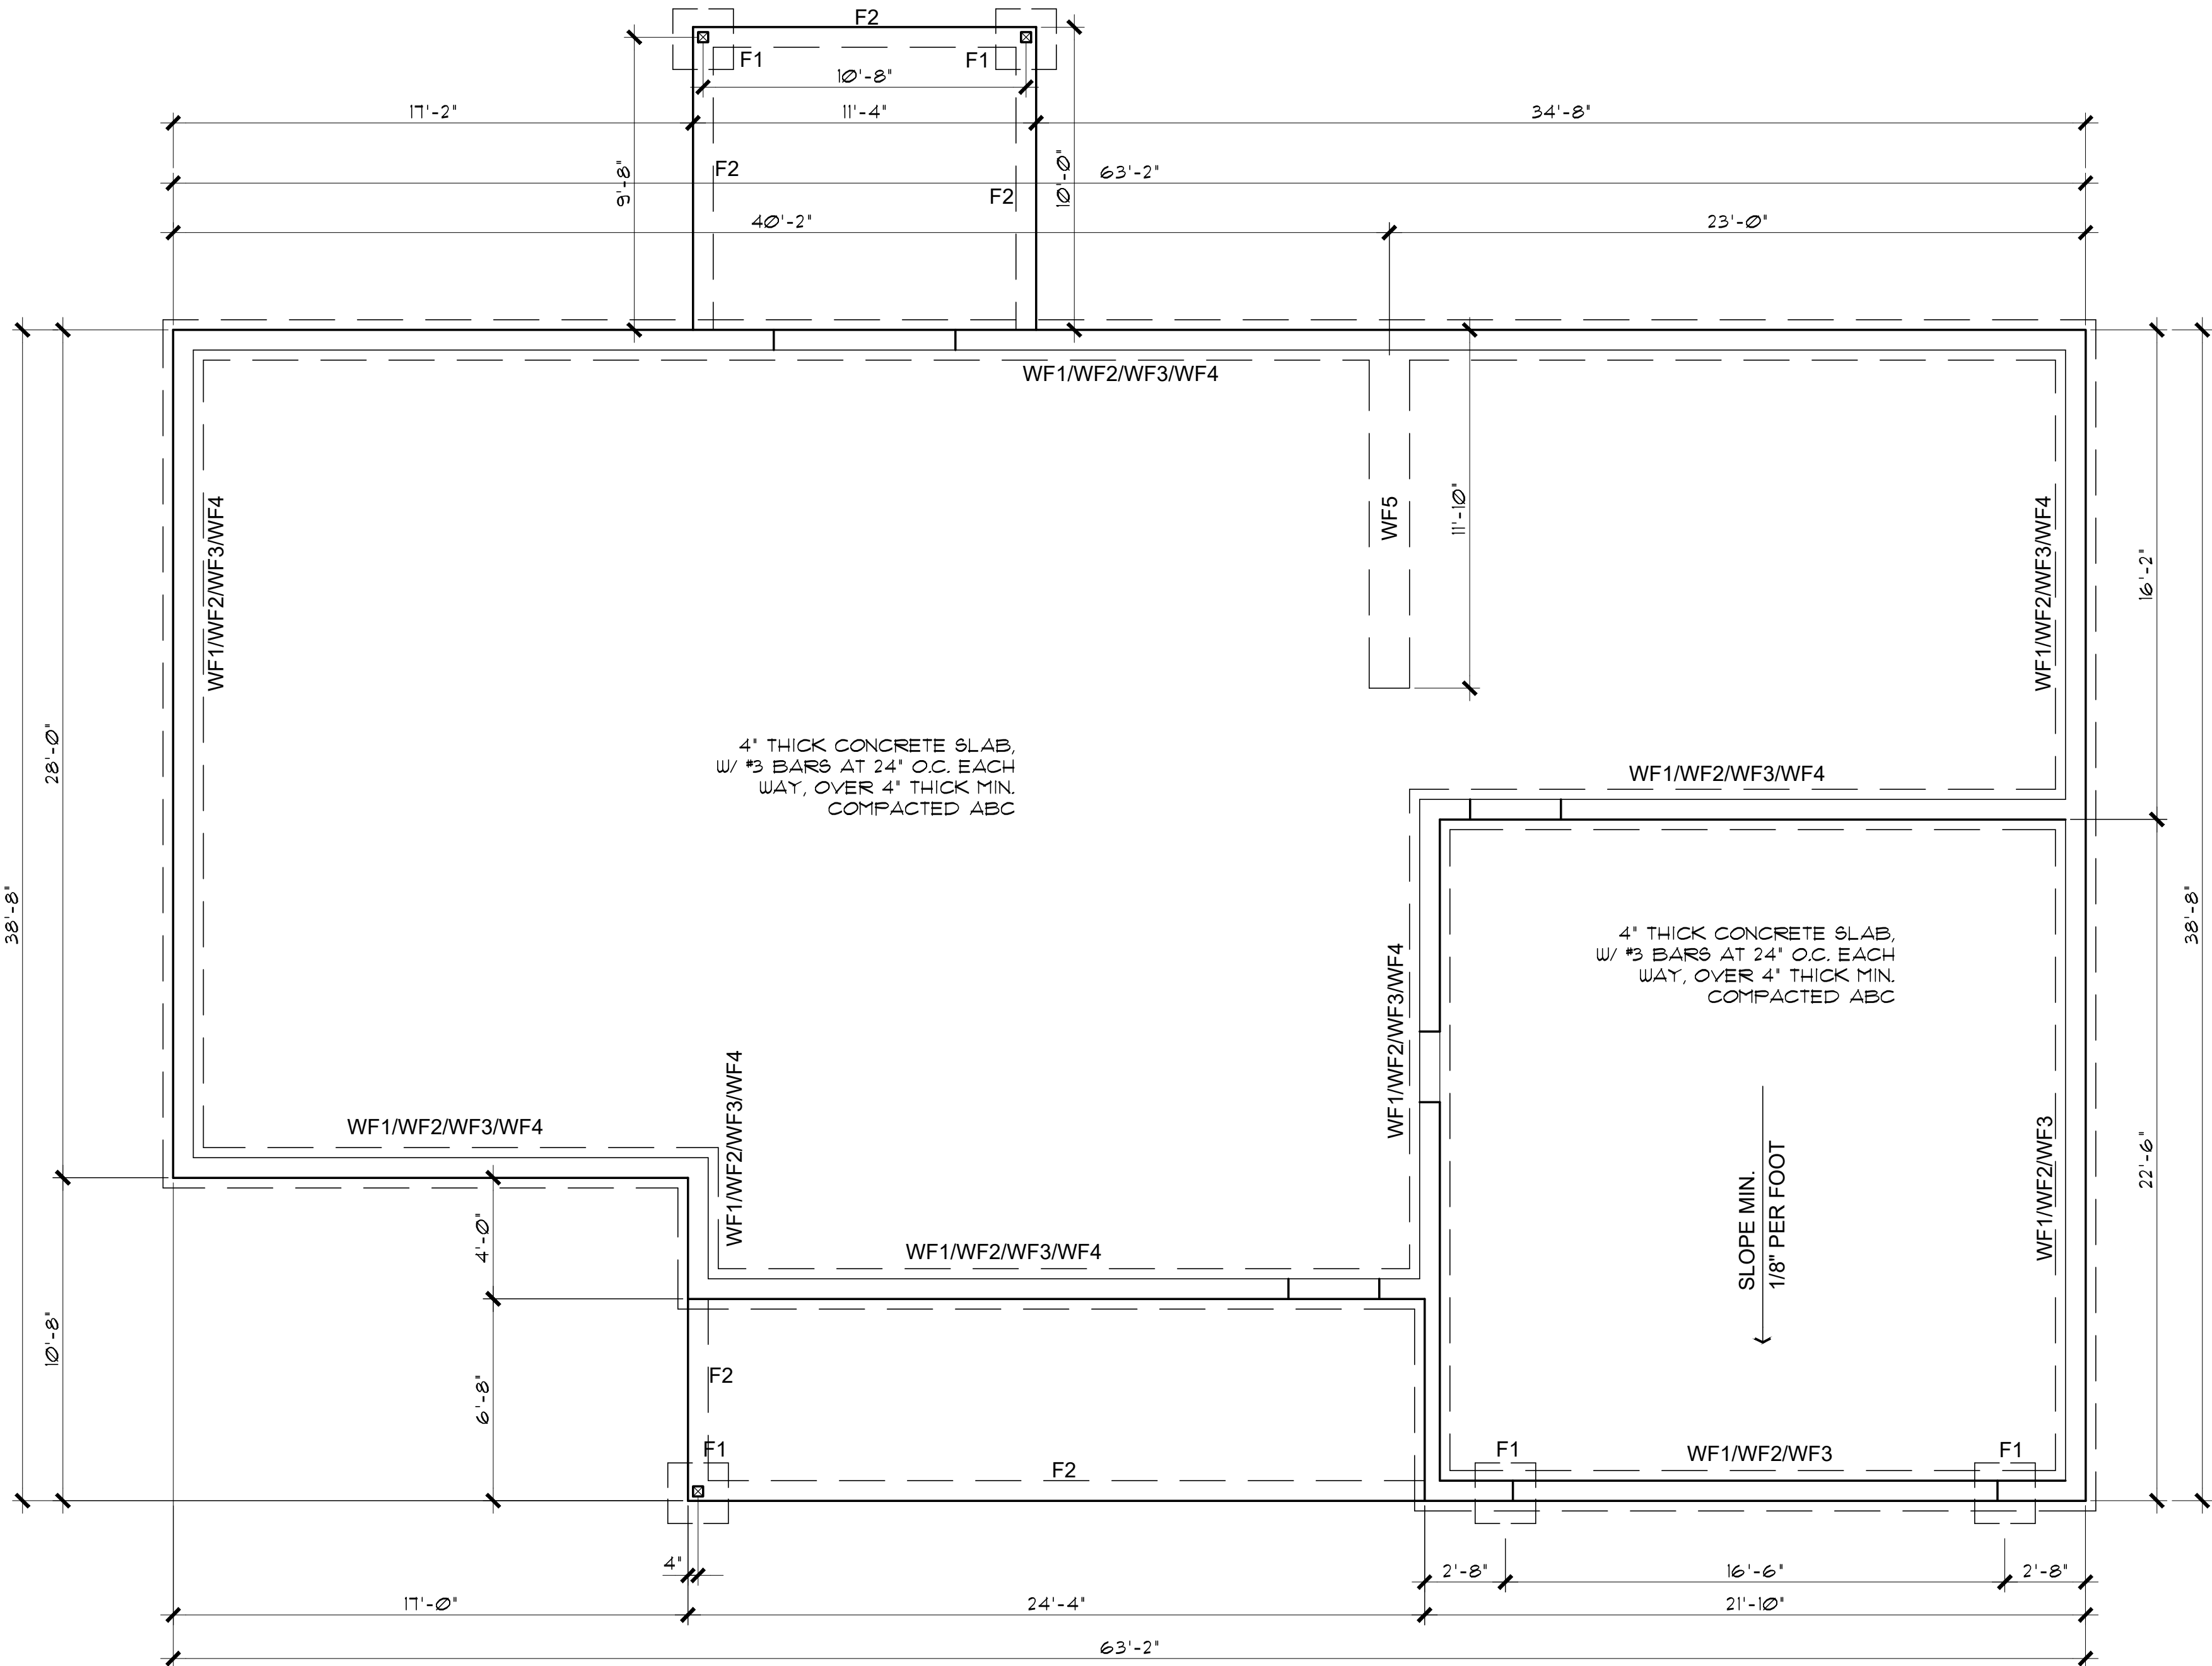

FOUNDATION PLAN (with Garage option)


SCALE: 1/4" = 1'-0"

SEE SHEET A-7.0 FOR FOUNDATION DETAILS

PROPERTY OF YAVAPAI COUNTY, AZ

Job no. : 3BD/2BA RIGHT
Date : 05/24/2024
Drawn by: MFR
Chk'd by: MFR
Scale : AS NOTED
Revisions:

This design is the property of Mark Rogers, Architect, PLLC and the drawings are the property of Yavapai County Government, and are not to be reproduced, or copied in whole or in part. It is only to be used for the project and site specifically identified herein and is not to be used on any other project. It is to be returned upon request.
Scales as stated hereon are valid on the original drawing only. Contractor shall carefully review all dimensions and conditions shown hereon and at once report to the Architect any error, inconsistency or omission he may discover.

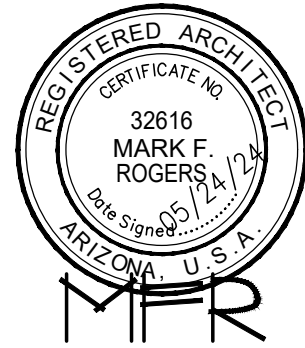

Mark Rogers, Architect, PLLC

761 Highland Circle
Chino Valley, Arizona 86323
Phone: (928) 848-3516
markrogers914@gmail.com

FOUNDATION PLANS
PHASE TWO - 3 BDRM / 2 BATH - RIGHT PARKING

YAVAPAI COUNTY, ARIZONA

1015 FAIR STREET
PRESCOTT, ARIZONA

SHEET NO:


A-2.0

PROPERTY OF YAVAPAI COUNTY, AZ

PROPERTY OF YAVAPAI COUNTY, AZ


REVIEWED FOR DESIGN
CRITERIA ONLY

SEE ATTACHED COVER SHEET FOR ALL
STAMPS. IT IS THE RESPONSIBILITY OF THE
OWNER/APPLICANT TO REVIEW AND
ACKNOWLEDGE APPLICABLE STAMPS.

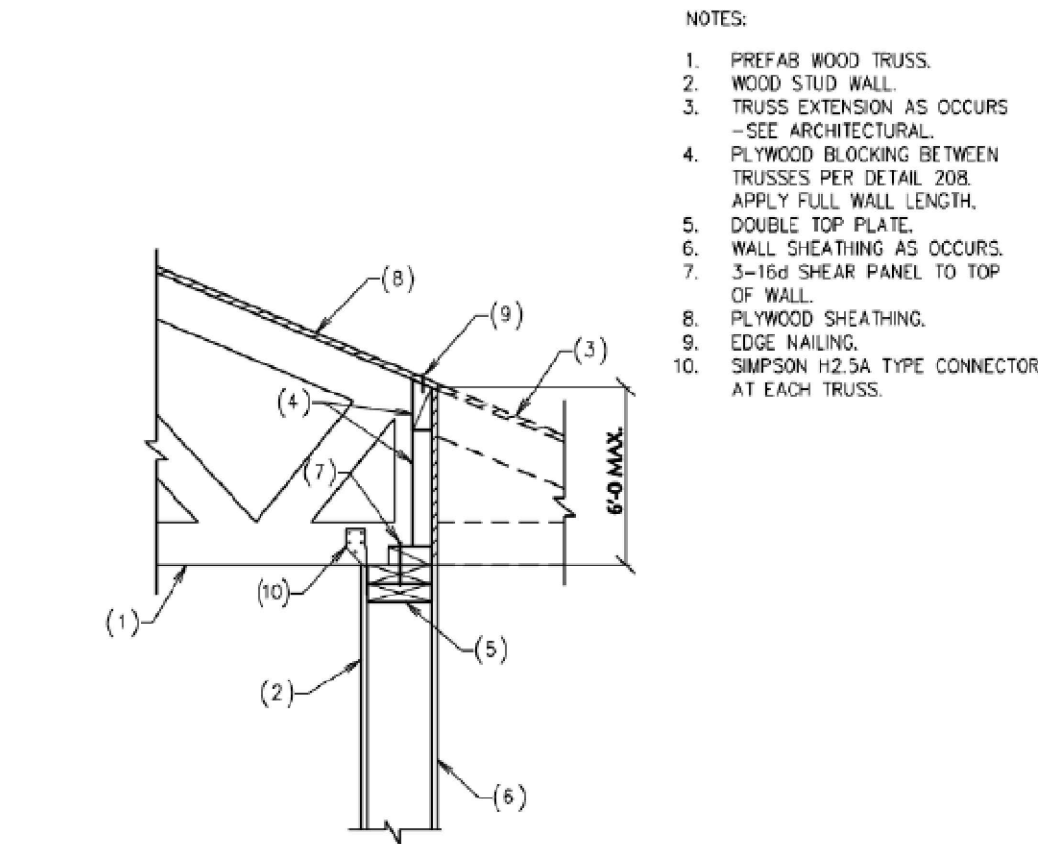

PREFAB WOOD TRUSS AT WOOD STUD WALL

NO SCALE

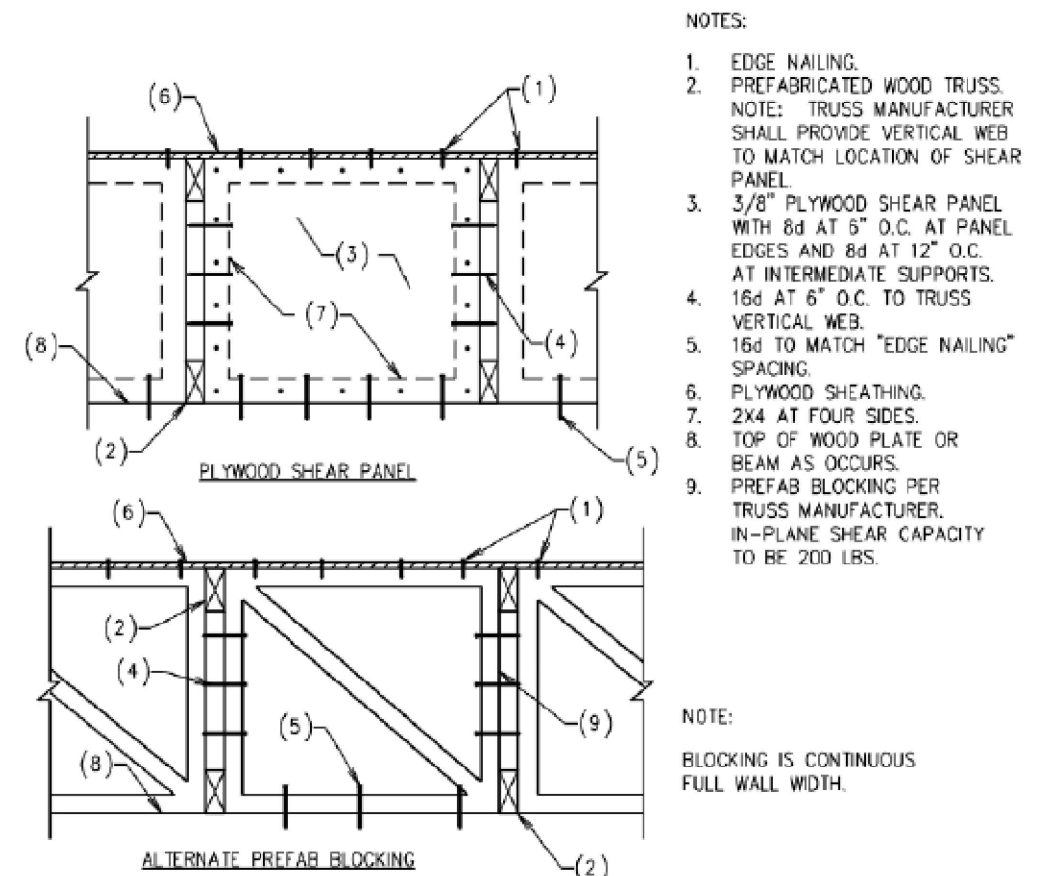


ELEVATION - TYPICAL PLYWOOD SHEAR PANEL BLOCKING

NO SCALE

2 PANEL BLOCKING DETAIL

SCALE: 1/4" = 1'-0"

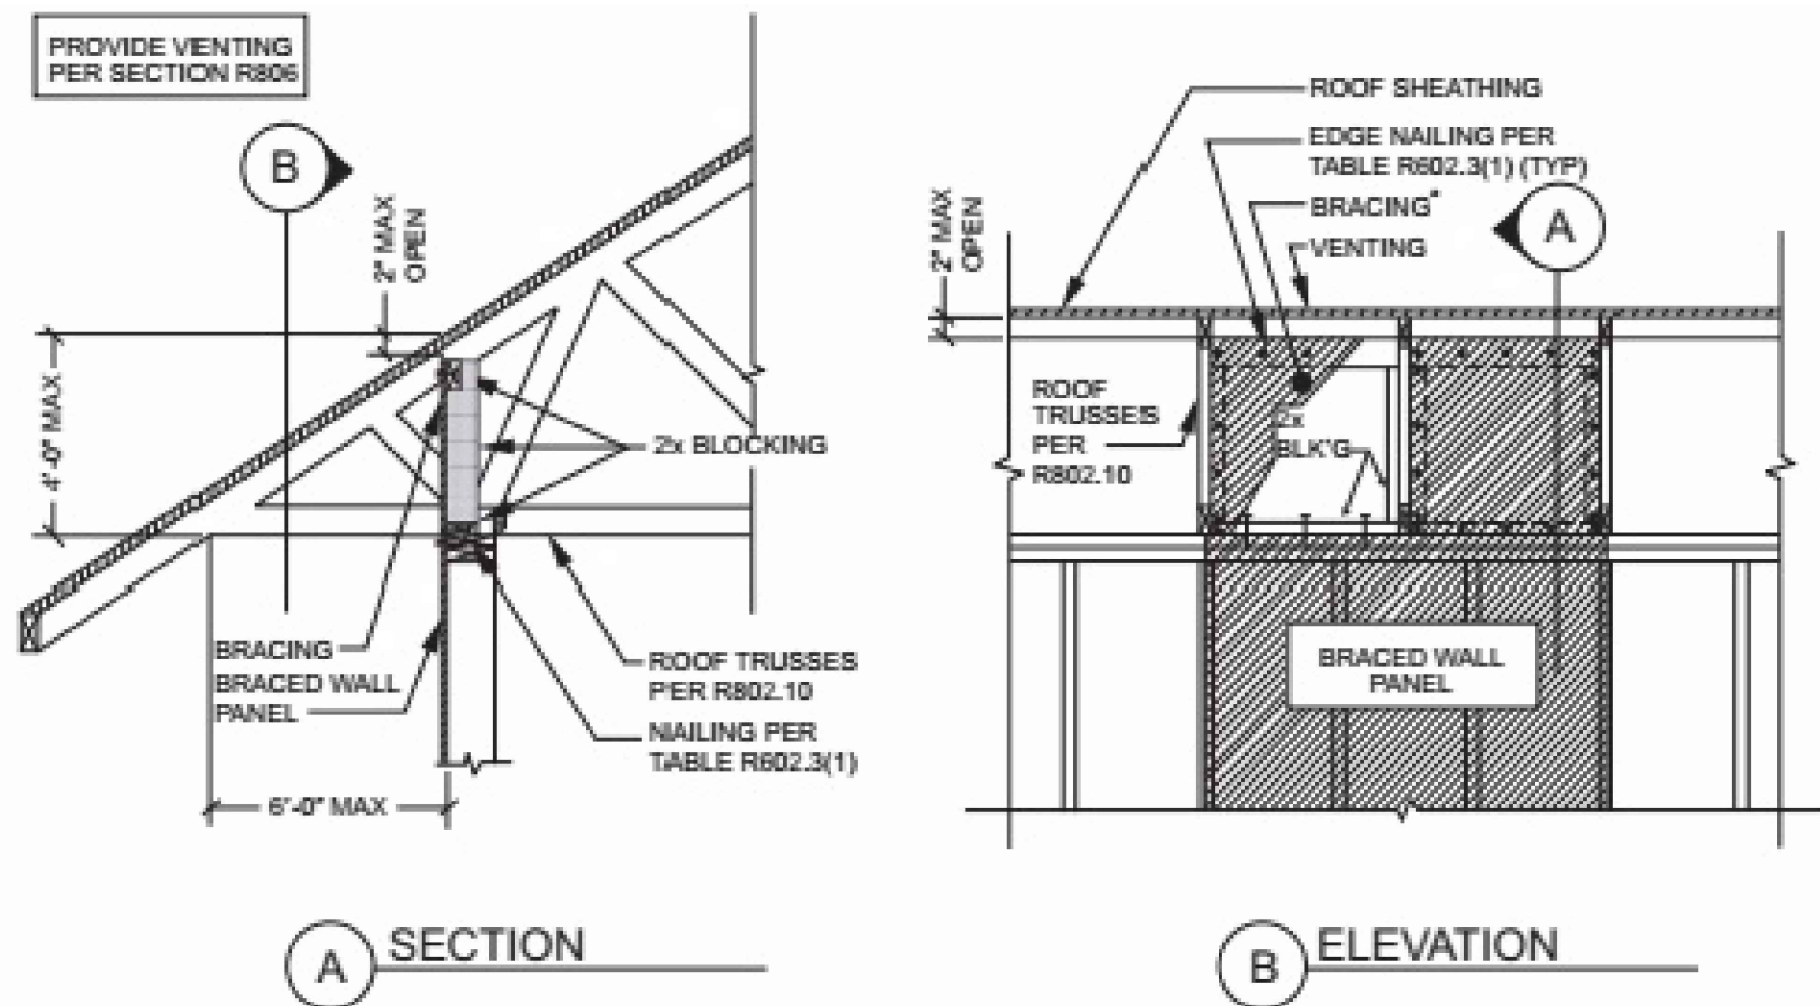


1 BRACED WALL PANEL CONNECTION OPTION AT PERPENDICULAR ROOF TRUSSES

SCALE: 1/2" = 1'-0"

2018 IRC FIGURE R602.10.8.2(3)

PROPERTY OF YAVAPAI COUNTY, AZ

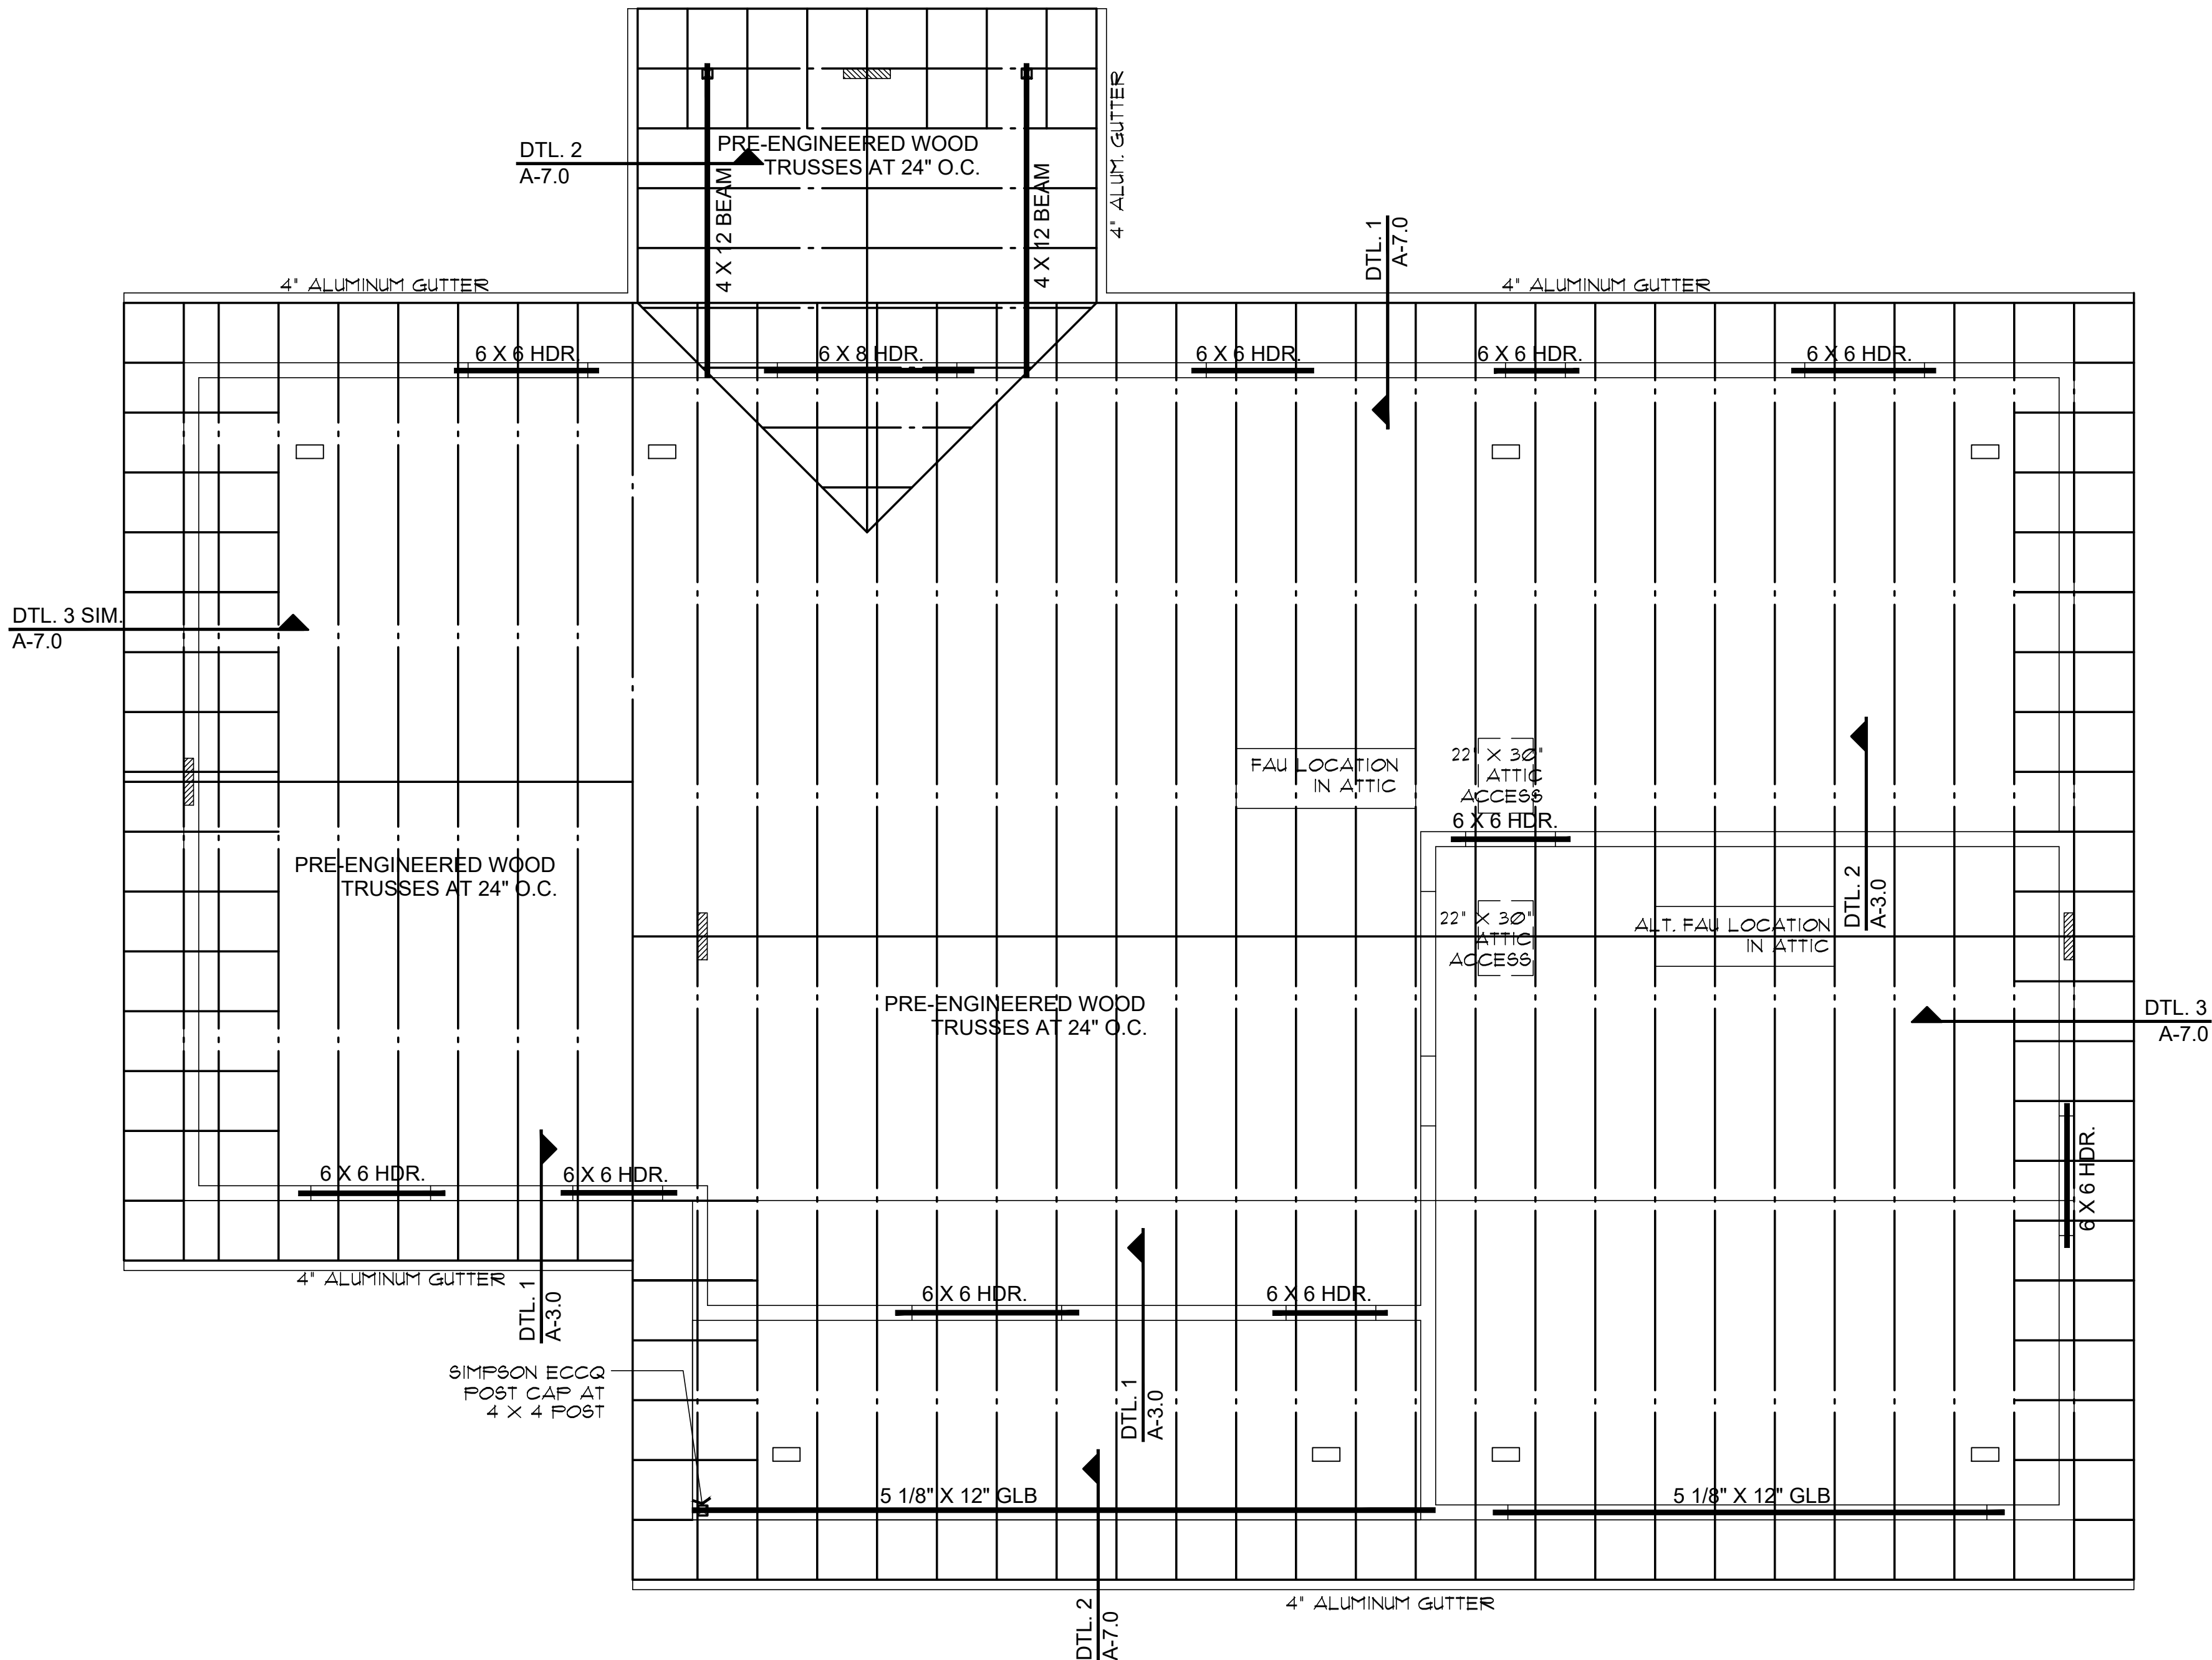

ROOF FRAMING PLAN (with optional Garage)

SCALE: 1/4" = 1'-0"

NOTE: PROVIDE PANEL EDGE SUPPORT FOR NARROW-WIDTH ROOF SHEATHING PER APA TECHNICAL REPORT #R275A.

ROOF VENTILATION REQUIRED 2373 SQ. FT. / 3000 = 8 SQ. FT. (1152 SQ. IN.) USE 4 GABLE-END VENTS AT 144 SQ. IN. MINIMUM EACH VENT 516 SQ. IN. AT GABLE ENDS 8 O'HAGIN OR OTHER EQUAL LOW VENTS AT 12 SQ. IN. EACH 516 SQ. IN. LOW VENTS BIRDBLOCKS TO HAVE 3 HOLES, 2" DIA. EACH BOARD

ROOF NOTES


1. REFER TO TRUSS CALCULATIONS FOR FINAL ROOF FRAMING DESIGN.
2. SIMPSON'S H2.5A HANGERS TO BE APPLIED @ ALL TRUSS ENDS
3. ROOF SHEATHING TO BE 1/2" CDX PLYWOOD OR OSB.
4. SUPPORTED MEMBERS OF G.L.B. 4 GIRDERS OR OTHER CONCENTRATED LOADS SUPPORTED BY WALL OR PIER SHALL HAVE BEARING AT LEAST AS WIDE AS THE ROOF MEMBER.
5. ROOF PITCH 4:12 (TYP.).
6. OVERHANGS TO BE 24".
7. FURNACE IN ATTIC: PROVIDE A 24" SOLID PASSAGEWAY TO CONTROL SIDE OF APPLIANCE AND A 30" SERVICE SPACE ON THE CONTROL SIDE OF THE APPLIANCE (REQUIRED FOR ATTIC MOUNT FURNACES).
8. ALL RAFTERS SHALL BE DOUGLAS FIR #2 (SIZE PER PLAN) ALL STUDS SHALL BE HEM FIR #2 (SIZE PER PLAN)

SEE ROOF FRAMING DETAILS SHEET A7.0

Job no. : 3BD/2BA RIGHT
Date : 05/24/2024
Drawn by: MFR
Chk'd by: MFR
Scale : AS NOTED
Revisions:

This design is the property of Mark Rogers, Architect, PLLC and the drawings are the property of Yavapai County Government, and are not to be reproduced, or copied in whole or in part. It is only to be used for the project and site specifically identified herein and is not to be used on any other project. It is to be returned upon request.

Scales as stated herein are valid on the original drawing only. Contractor shall carefully review all dimensions and conditions shown herein and at once report to the Architect any error, inconsistency or omission he may discover.

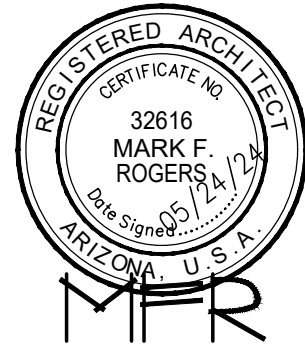

Mark Rogers, Architect, PLLC

86323

Chino Valley, Arizona

Phone: (928) 848-3516

markrogers914@gmail.com

761 Highland Circle

ROOF FRAMING PLAN (Garage option)
PHASE TWO - 3 BDRM / 2 BATH - RIGHT PARKING

YAVAPAI COUNTY, ARIZONA

1015 FAIR STREET
PRESCOTT, ARIZONA


SHEET NO:

A-3.0


PROPERTY OF YAVAPAI COUNTY, AZ

REVIEWED FOR DESIGN
CRITERIA ONLY

SEE ATTACHED COVER SHEET FOR ALL
STAMPS. IT IS THE RESPONSIBILITY OF THE
OWNER/APPLICANT TO REVIEW AND
ACKNOWLEDGE APPLICABLE STAMPS.

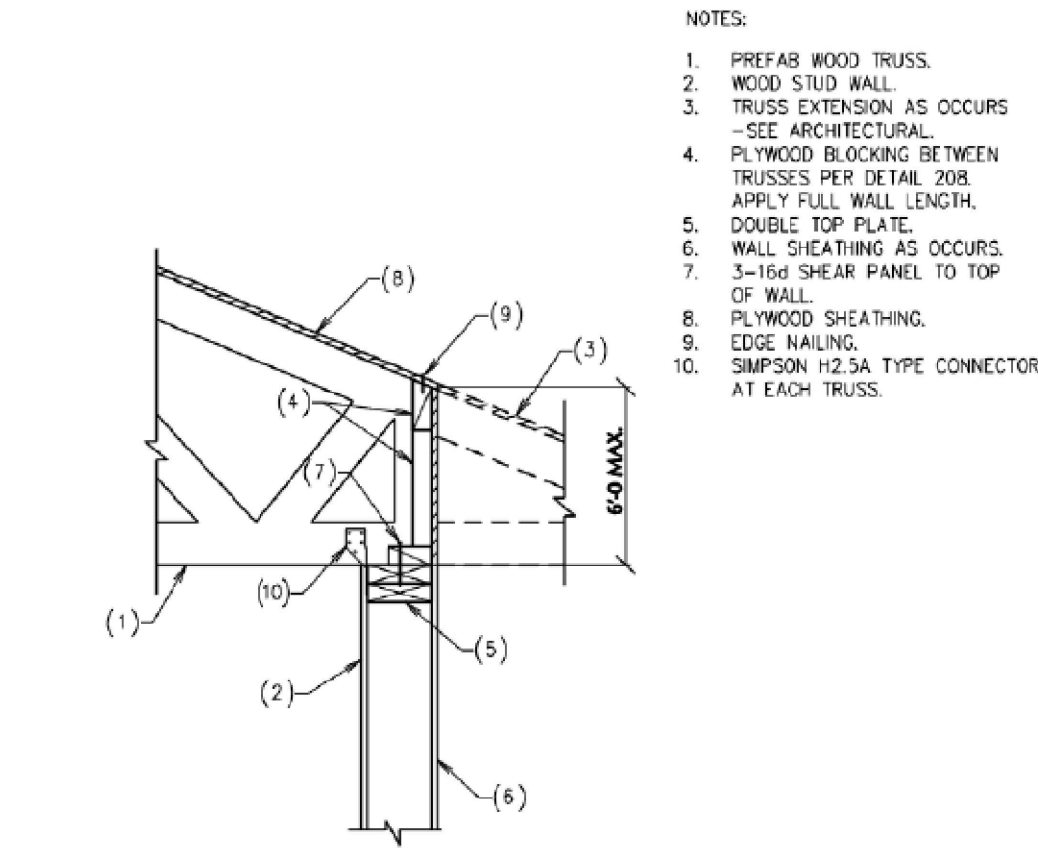


PREFAB WOOD TRUSS AT WOOD STUD WALL
NO SCALE

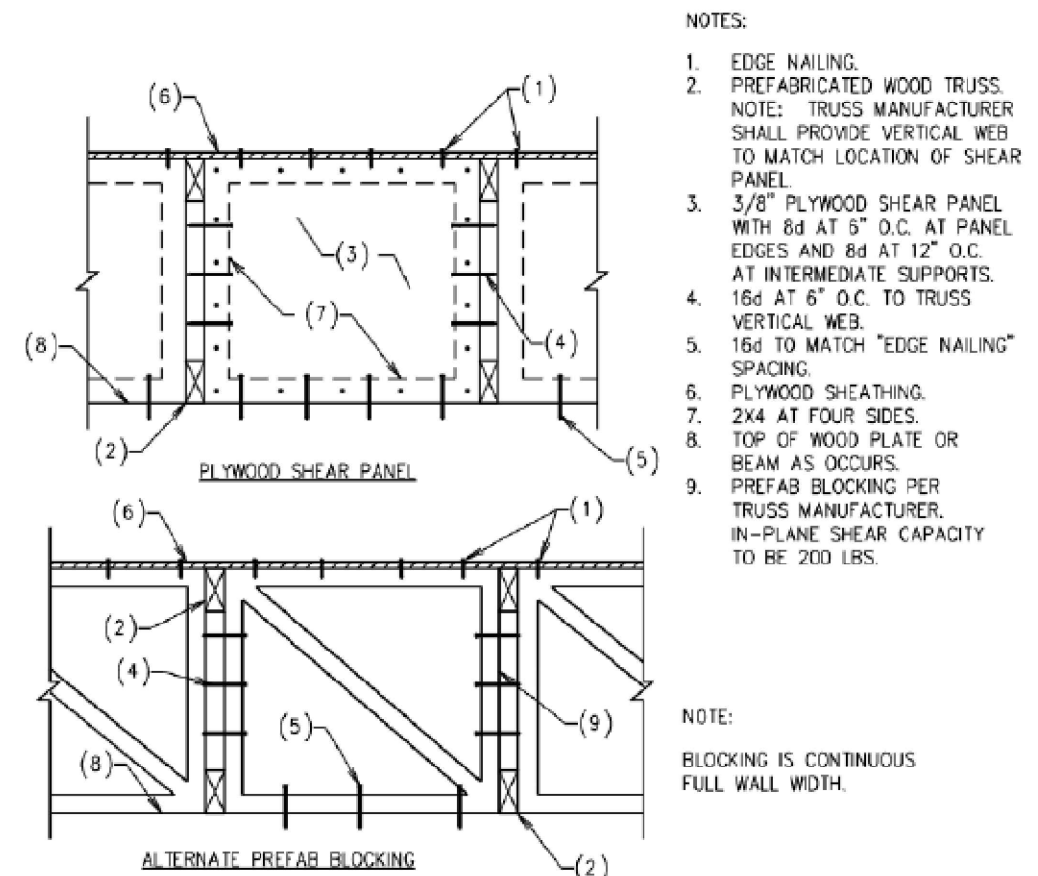

ELEVATION - TYPICAL PLYWOOD SHEAR PANEL BLOCKING
NO SCALE

2 PANEL BLOCKING DETAIL

SCALE: 1/4" = 1'-0"

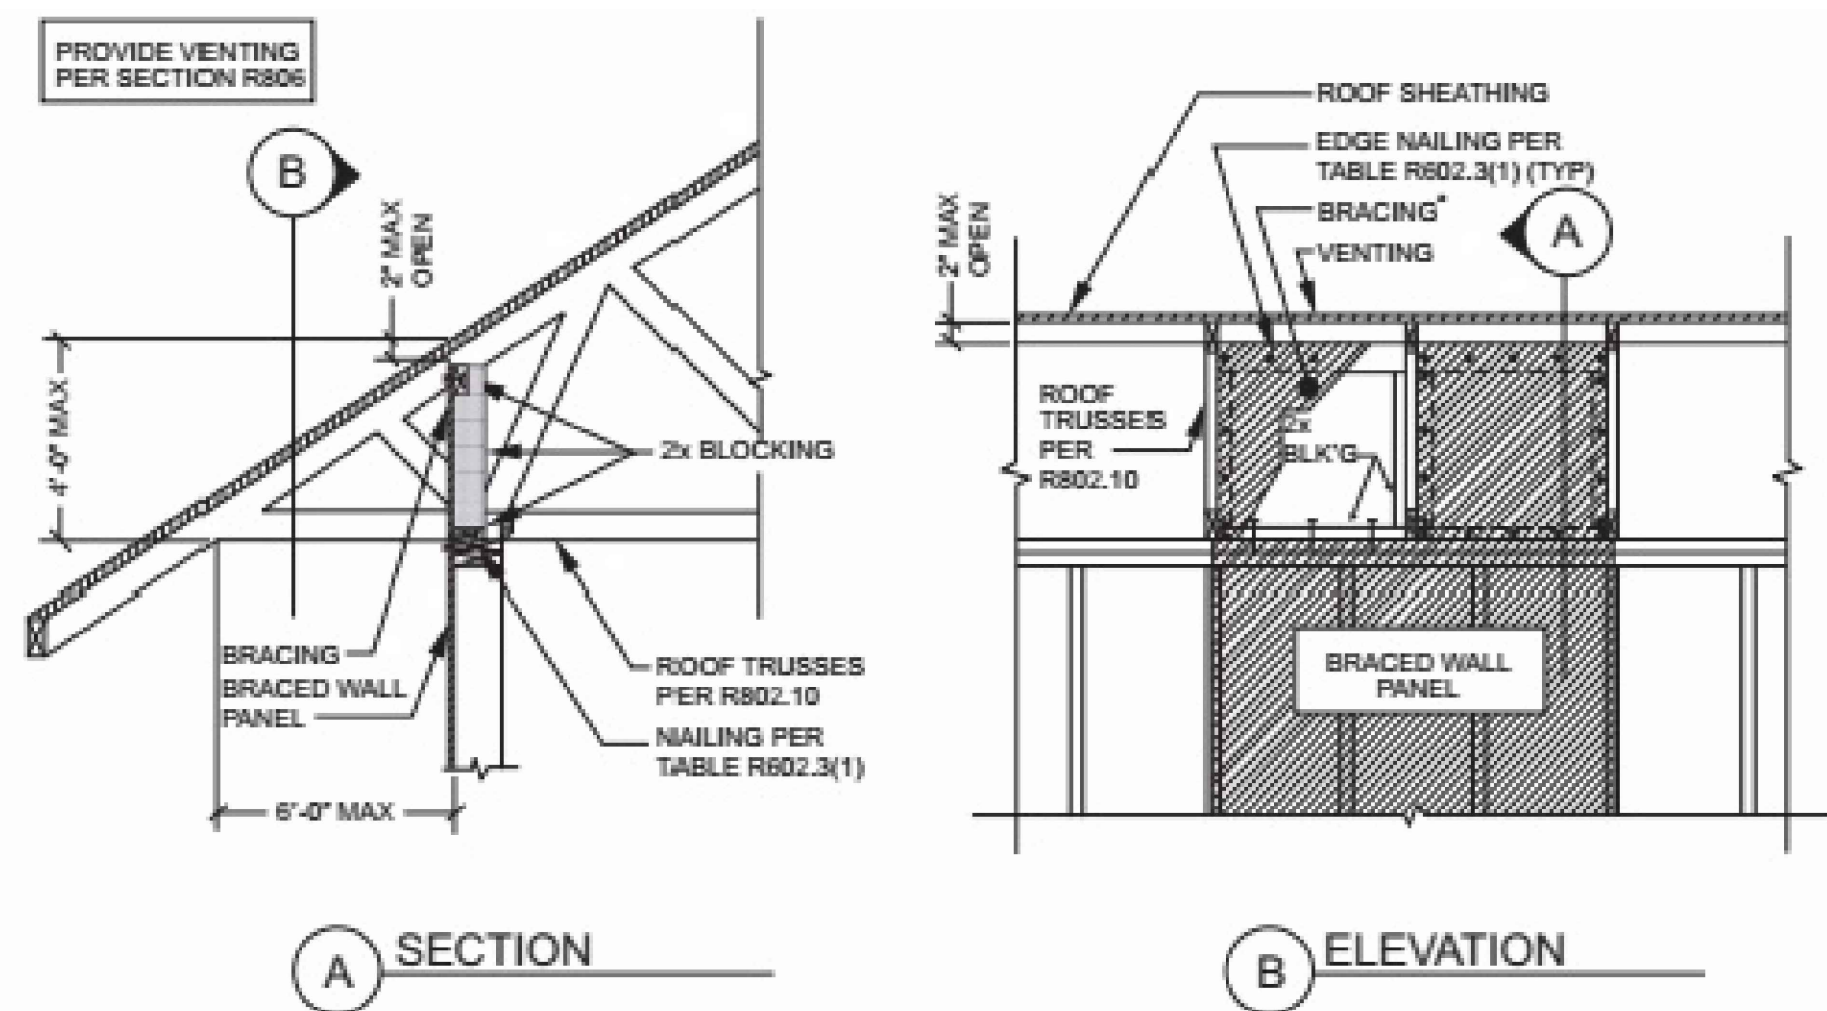


1 BRACED WALL PANEL CONNECTION OPTION AT PERPENDICULAR ROOF TRUSSES

SCALE: 1 1/2" = 1'-0"

2018 IRC FIGURE R602.10.8.2(3)

PROPERTY OF YAVAPAI COUNTY, AZ

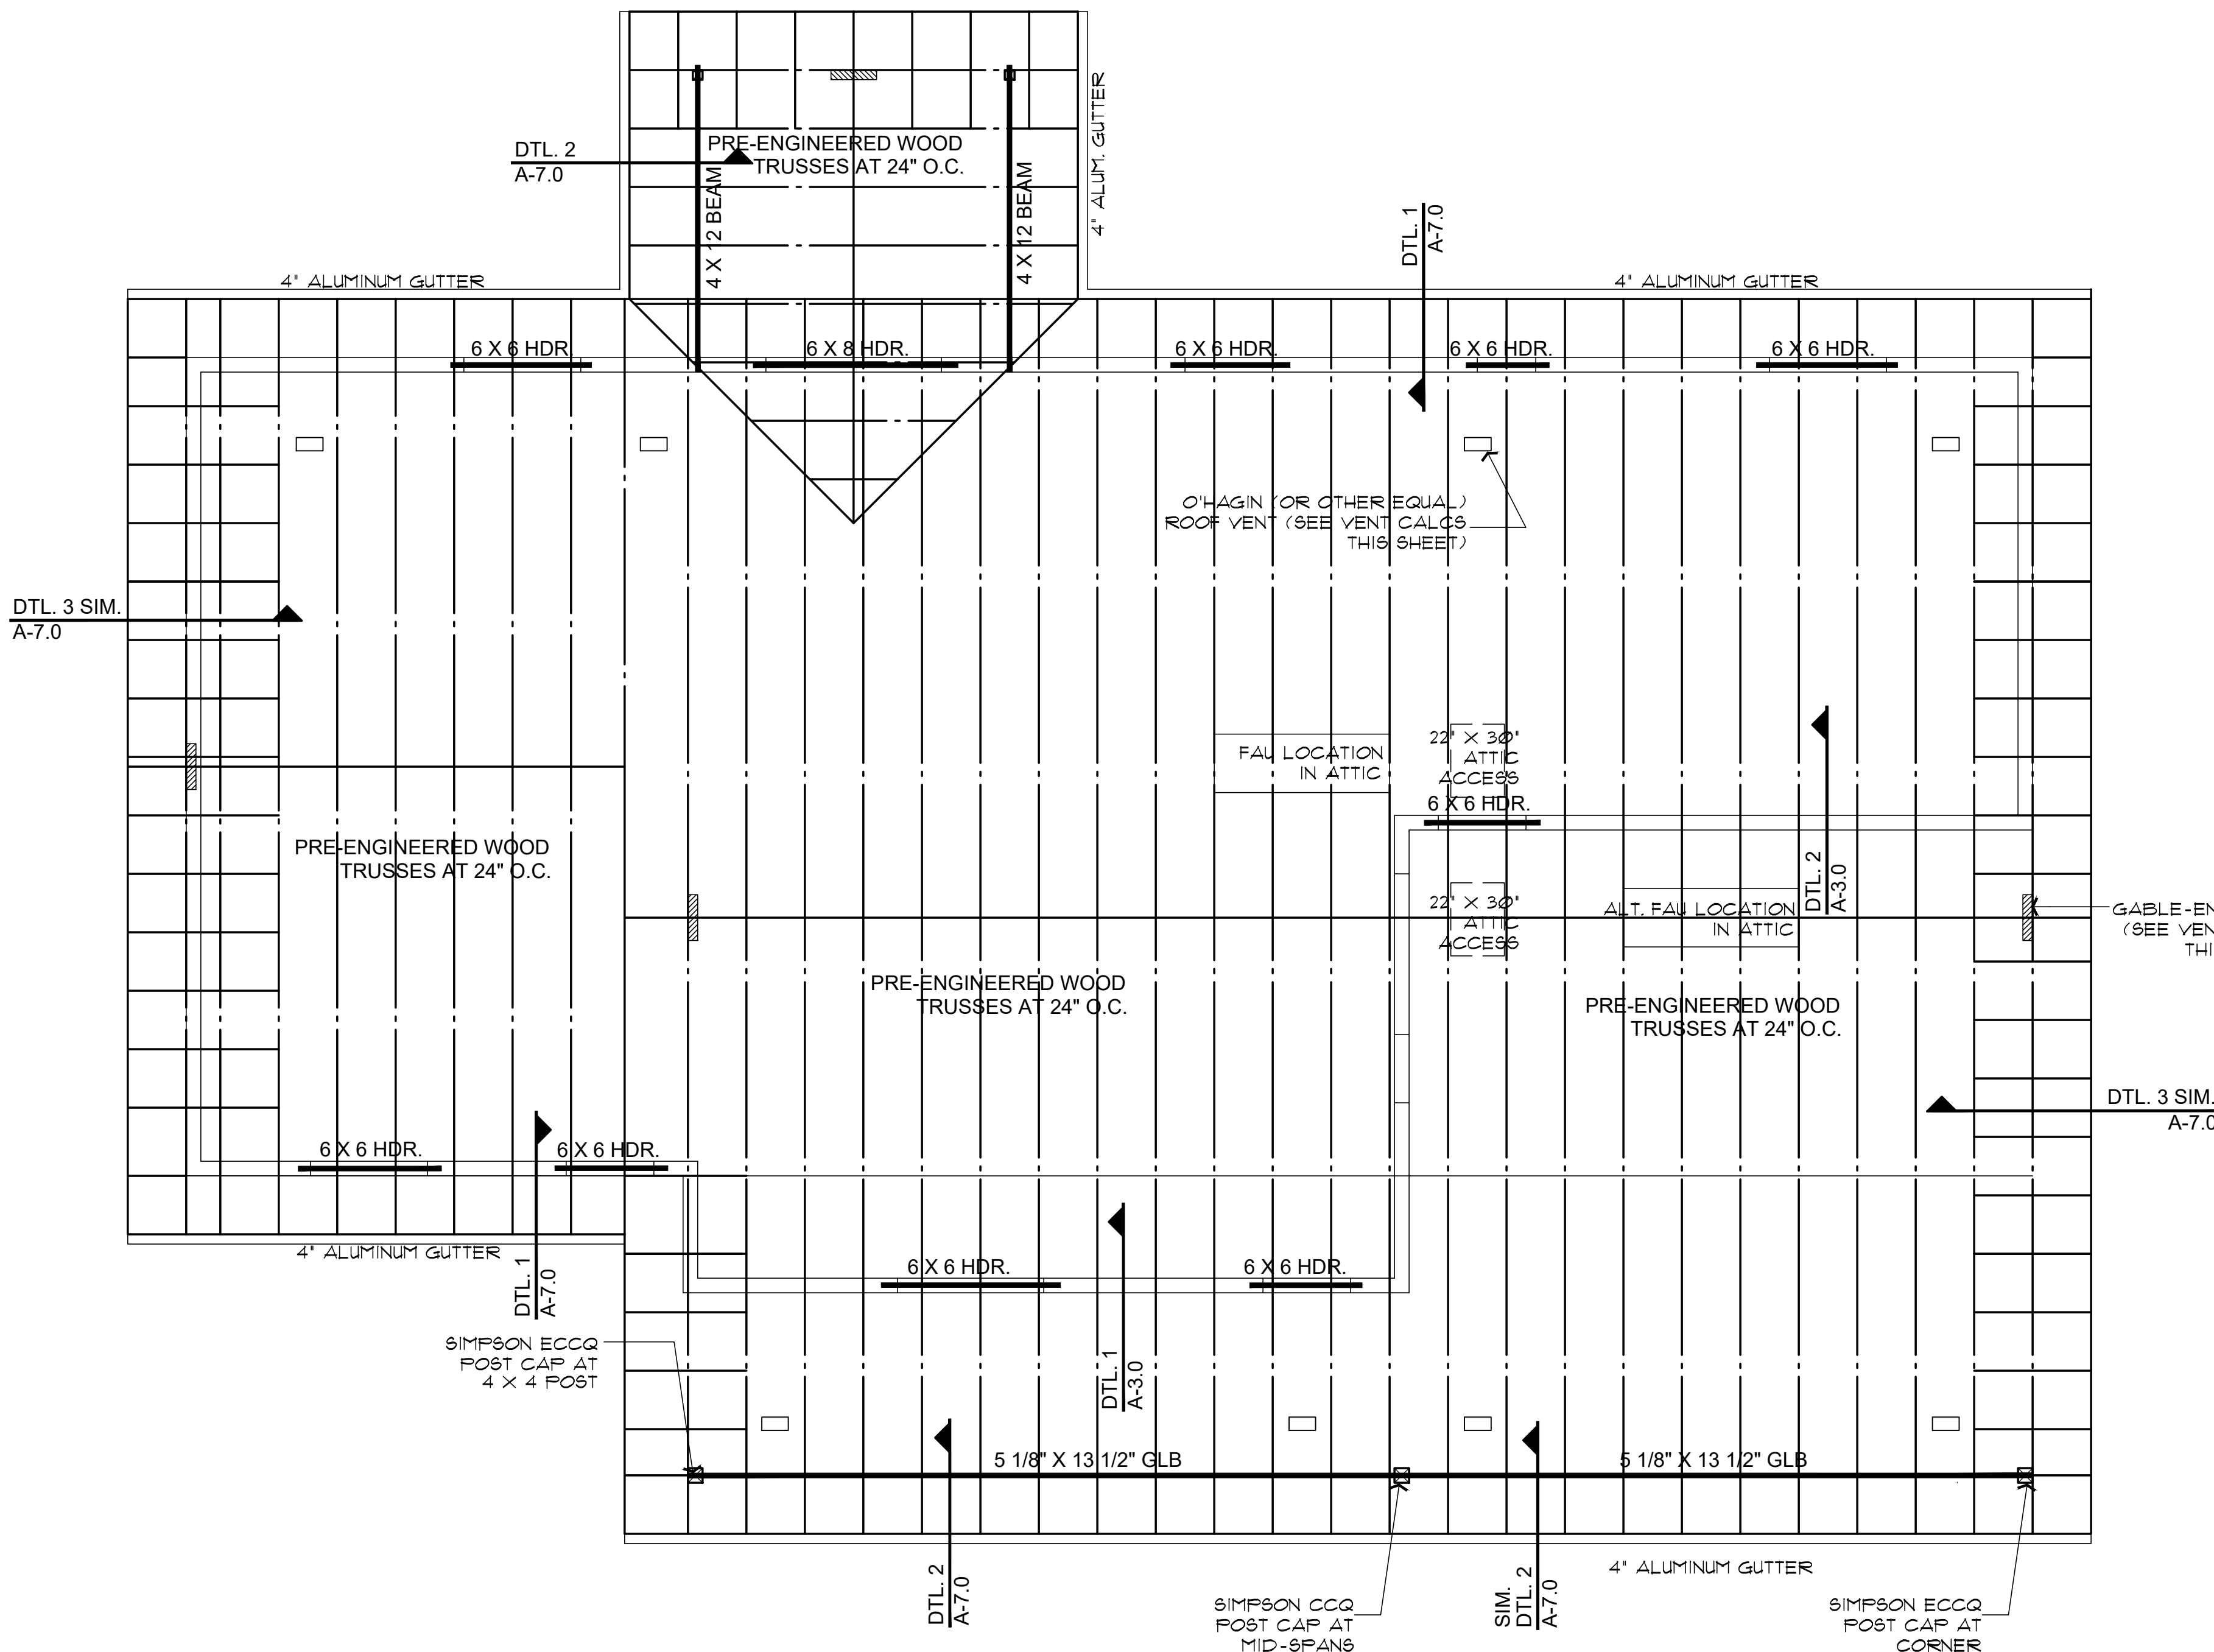

ROOF FRAMING PLAN (with optional Carport)

SCALE: 1/4" = 1'-0"

NOTE: PROVIDE PANEL EDGE SUPPORT FOR NARROW-WIDTH ROOF SHEATHING PER APA TECHNICAL REPORT #R275A.

ROOF VENTILATION REQUIRED 2313 SQ. FT. / 3000 = 8 SQ. FT. (1152 SQ. IN.) USE 4 GABLE-END VENTS AT 144 SQ. IN. MINIMUM EACH VENT 516 SQ. IN. AT GABLE ENDS 8 O'HAGIN OR OTHER EQUAL LOW VENTS AT 12 SQ. IN. EACH 516 SQ. IN. LOW VENTS BIRDBLOCKS TO HAVE 3 HOLES, 2" DIA. EACH BOARD

ROOF NOTES

1. REFER TO TRUSS CALCULATIONS FOR FINAL ROOF FRAMING DESIGN.
2. SIMPSON H2.5A HANGERS TO BE APPLIED @ ALL TRUSS ENDS
3. ROOF SHEATHING TO BE 1/2" CDX PLYWOOD OR OSB.
4. SUPPORTED MEMBERS OF G.L.B. 4 GIRDERS OR OTHER CONCENTRATED LOADS SUPPORTED BY WALL OR PIER SHALL HAVE BEARING AT LEAST AS WIDE AS THE ROOF MEMBER.
5. ROOF PITCH 4:12 (TYP.).
6. OVERHANGS TO BE 24".
7. FURNACE IN ATTIC: PROVIDE A 24" SOLID PASSAGEWAY TO CONTROL SIDE OF APPLIANCE AND A 30" SERVICE SPACE ON THE CONTROL SIDE OF THE APPLIANCE (REQUIRED FOR ATTIC MOUNT FURNACES)
8. ALL RAFTERS SHALL BE DOUGLAS FIR #2 (SIZE PER PLAN) ALL STUDS SHALL BE HEM FIR #2 (SIZE PER PLAN)

SEE ROOF FRAMING DETAILS SHEET A7.0

Mark Rogers, Architect, PLLC

ROOF FRAMING PLAN (Carport option)
PHASE TWO - 3 BDRM / 2 BATH - RIGHT PARKING

YAVAPAI COUNTY, ARIZONA

1015 FAIR STREET
PRESCOTT, ARIZONA



761 Highland Circle
Chino Valley, Arizona 86323
Phone: (928) 848-3516
markrogers914@gmail.com

Job no. : 3BD/2BA RIGHT
Date : 05/24/2024
Drawn by: MFR
Chk'd by: MFR
Scale : AS NOTED
Revisions:

This design is the property of Mark Rogers, Architect, PLLC and the drawings are the property of Yavapai County Government, and are not to be reproduced, or copied in whole or in part. It is only to be used for the project and site specifically identified herein and is not to be used on any other project. It is to be returned upon request.
Seals as stated herein are valid on the original drawing only. Contractor shall carefully review all dimensions and conditions shown herein and at once report to the Architect any error, inconsistency or omission he may discover.







SHEET NO:






A-3.1

PROPERTY OF YAVAPAI COUNTY, AZ

REVIEWED FOR DESIGN
CRITERIA ONLY

SEE ATTACHED COVER SHEET FOR ALL
STAMPS. IT IS THE RESPONSIBILITY OF THE
OWNER/APPLICANT TO REVIEW AND
ACKNOWLEDGE APPLICABLE STAMPS.

VIEW AND BLUE STAMPS		WIND SPEED (MPH)		115		115		115		115		115	
BRACED WALL LINE		A		B		C							
STORY													
BRACED WALL PANEL METHOD		CS-WSP CS-PF CS-G		GB		CS-WSP CS-PF CS-G							
AVG BWL SPACING (ft)		21.83		41.33		32							
TABULAR REQUIRED (ft)		2.92		7.25		4.80							
ADJUSTMENT	EXPOSURE	C	1.20	C	1.20	C	1.20	C			C		
	EAVE-RIDGE HT (ft)	7.00	0.82	7.00	0.82	7.00	0.82						
	STORY HEIGHT (ft)	9.00	0.95	9.00	0.95	9.00	0.95						
	# BWLs	3.00	1.30	3.00	1.30	3.00	1.30						
	ADD PAIR 800# HOLD DOWNS	NO	1.00	NO	1.00	NO	1.00						
	OMIT INTERIOR GB	NO	1.00	NO	1.00	NO	1.00						
	METHOD GB FASTEN @ 4" o.c.	NO	1.00	NO	1.00	NO	1.00						
	HORIZONTAL BLOCKING OMITTED	NO	1.00	NO	1.00	NO	1.00						
REQUIRED BWP LENGTH (ft)		3.55		8.81		5.83							
ACTUAL BWP	CONTRIBUTING LENGTH	BWP	METHOD	LENGTH (ft)	METHOD	LENGTH (ft)	METHOD	LENGTH (ft)	METHOD	LENGTH (ft)	METHOD	LENGTH (ft)	
		1	CS-WSP	4.00	DS - GB	5.83	CS-WSP	4.00					
		2	CS-WSP	4.00	DS - GB	6.00	CS-WSP	4.00					
		3	CS-WSP	4.00	CS-WSP	6.67							
		4											
		5											
		6											
		7											
ACTUAL BWP LENGTH (ft)		12.00		18.50		8.00							
ACTUAL ≥ REQUIRED		YES		YES		YES							
SPACE	BWPs ≤ 20' APART	YES		YES		YES							
	Length of BWL (ft)	38.67		38.67		28							
	BWP 1 ≤ 16', 2 > 16'	YES		YES		YES							
ENDS	BWP WITHIN 10' OF END	YES	YES	YES	YES	YES	YES						
	CONTINUOUS END CONDITION	3	3	3	3	4	3						
BWL COMPLIANCE PASS-FAIL		PASS		PASS		PASS							

WIND SPEED (MPH)		115		115		115		115		115	
BRACED WALL LINE		1		2		3		4			
STORY											
BRACED WALL PANEL METHOD		CS-VSP CS-PF CS-G		GB		CS-VSP CS-PF CS-G		CS-VSP CS-PF CS-G			
AVG BWL SPACING (ft)		16.16		22.5		32		22.5			
TABULAR REQUIRED (ft)		2.92		7.25		4.80		3.75			
ADJUSTMENT	EXPOSURE	C	1.20	C	1.20	C	1.20	C	1.20	C	
	EAVE-RIDGE HT (ft)	7.00	0.82	7.00	0.82	7.00	0.82	7.00	0.82		
	STORY HEIGHT (ft)	9.00	0.95	9.00	0.95	9.00	0.95	9.00	0.95		
	# BWLs	4.00	1.45	4.00	1.45	4.00	1.45	4.00	1.45		
	ADD PAIR 800# HOLD DOWNS	NO	1.00	NO	1.00	NO	1.00	NO	1.00		
	OMIT INTERIOR GB	NO	1.00	NO	1.00	NO	1.00	NO	1.00		
	METHOD GB FASTEN @ 4" o.c.	NO	1.00	NO	1.00	NO	1.00	NO	1.00		
HORIZONTAL BLOCKING OMITTED	NO	1.00	NO	1.00	NO	1.00	NO	1.00			
REQUIRED BWP LENGTH (ft)		3.96		9.83		6.51		5.08			
ACTUAL BWP	CONTRIBUTING LENGTH	BWP	METHOD	LENGTH (ft)	METHOD	LENGTH (ft)	METHOD	LENGTH (ft)	METHOD	LENGTH (ft)	
		1	CS-WSP	4.00	DS - GB	8.00	CS-WSP	4.00	CS-WSP	2.92	
		2	CS-WSP	4.00	DS - GB	6.00	CS-WSP	4.00	CS-WSP	2.92	
		3	CS-WSP	4.00			CS-WSP	4.00			
		4	CS-WSP	4.00							
		5									
		6									
		7									
ACTUAL BWP LENGTH (ft)		16.00		14.00		12.00		5.84			
ACTUAL ≥ REQUIRED		YES		YES		YES		YES			
SPACE	BWPs ≤ 20' APART	YES		YES		YES		YES			
	Length of BWL (ft)	63.16		21.83		41.33		21.83			
# of BWPs	BWP 1 ≤ 16', 2 > 16'	YES		YES		YES		YES			
	BWP WITHIN 10' OF END	YES	YES	YES	YES	YES	YES	YES	YES		
ENDS	CONTINUOUS END CONDITION	3	3								
BWL COMPLIANCE PASS-FAIL		PASS		PASS		PASS		PASS			

BRACE WALL PLAN (with Garage option)

SCALE: 1/4" = 1'-0"


OPTIONS FOR EXTERIOR SIDING-
OPTION #1:
5/8" THICK T1-11, SIDING, 12" MINIMUM GROOVE SPACING. THE
T1-11 MAY SERVE AS THE BRACE WALL PANELS, PROVIDED
THE CODE REQUIRED NAILING PATTERN IS APPLIED.
SEE DETAIL #1, A-6.0

OPTION #2:
MINIMUM 3/8" THICK "LP SMART SIDING". (SEE DTL. #1, A-6.0)

OPTION #3:
STUCCO OVER WEATHER BARRIER, OVER 1/2" PLYWOOD
SEE DETAIL #2, A-6.0)


OPTION #4:
HORIZ. SIDING OVER WEATHER BARRIER, OVER 1/2" PLYWOOD
SEE DETAIL #3, A-6.0)

PROPERTY OF YAVAPAI COUNTY, AZ

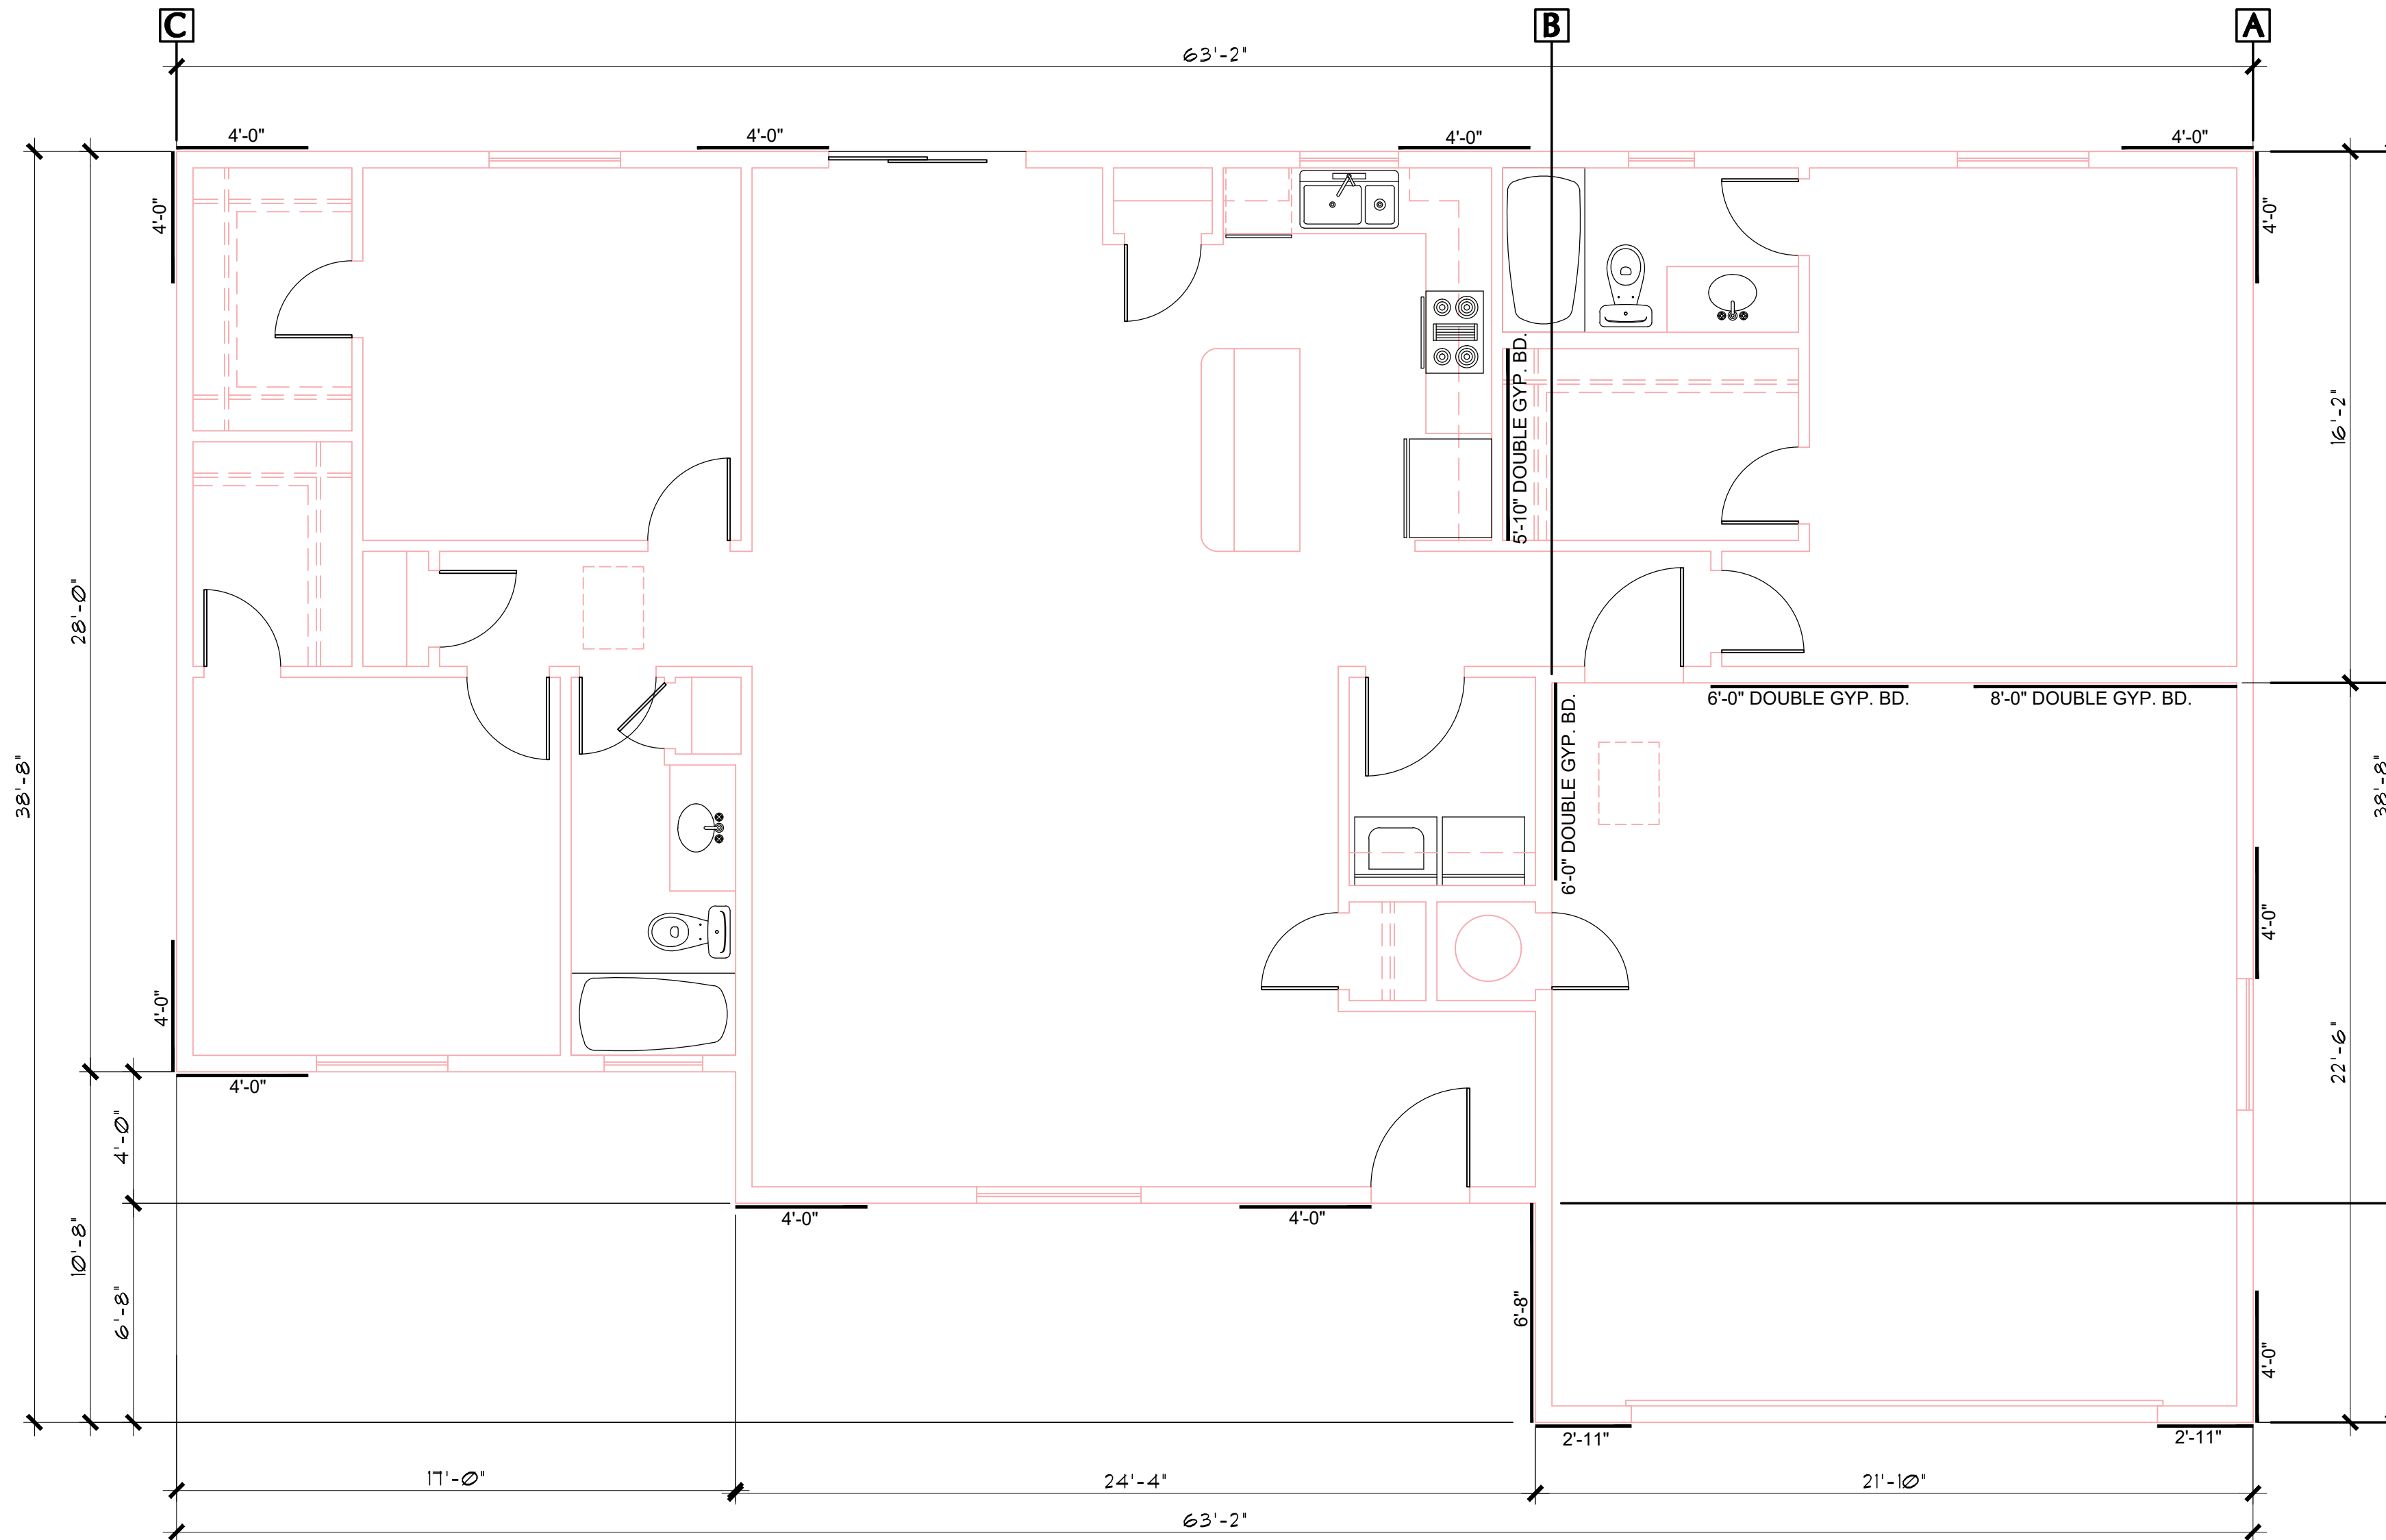

Job no. : 3BD/2BA RIGHT
Date : 05/24/2024
Drawn by: MFR
Chk'd by: MFR
Scale : AS NOTED
Revisions:

This design is the property of Mark Rogers, Architect, PLLC and the drawings are the property of Yavapai County Government, and are not to be reproduced, or copied in whole or in part. It is only to be used for the project and site specifically identified herein and is not to be used on any other project. It is to be returned upon request.
Scales as stated herein are valid on the original drawing only. Contractor shall carefully review all dimensions and conditions shown herein and at once report to the Architect any error, inconsistency or omission he may discover.

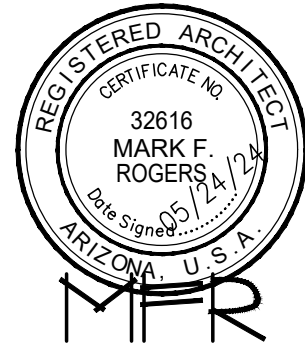

Mark Rogers, Architect, PLLC

♦ ♦ ♦ Chino Valley, Arizona 86323
Phone: (928) 848-3516
markrogers914@gmail.com

1015 FAIR STREET
PRESCOTT, ARIZONA

BRACE WALL PLAN - GARAGE OPTION
CALCULATIONS
PHASE TWO - 3 BDRM / 2 BATH - RIGHT PARKING

YAVAPAI COUNTY, ARIZONA






SHEET NO:





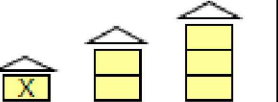

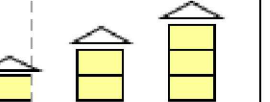

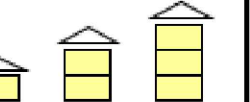

A-4.0


PROPERTY OF YAVAPAI COUNTY, AZ

SEE ATTACHED COVER SHEET FOR ALL STAMPS. IT IS THE RESPONSIBILITY OF THE OWNER/APPLICANT TO REVIEW AND ACKNOWLEDGE APPLICABLE STAMPS.

CS-WSPs

WIND SPEED (MPH)		115		115		115		115		115		
BRACED WALL LINE		1		2		3						
STORY												
BRACED WALL PANEL METHOD		CS-WSP CS-PF CS-G		CS-WSP CS-PF CS-G		CS-WSP CS-PF CS-G						
AVG BWL SPACING (ft)		16.16		16.16		32						
TABULAR REQUIRED (ft)		2.92		2.92		4.80						
ADJUSTMENT	EXPOSURE	C	1.20	C	1.20	C	1.20	C		C		
	EAVE-RIDGE HT (ft)	7.00	0.82	7.00	0.82	7.00	0.82					
	STORY HEIGHT (ft)	9.00	0.95	9.00	0.95	9.00	0.95					
	# BWLS	3.00	1.30	3.00	1.30	3.00	1.30					
	ADD PAIR 800# HOLD DOWNS	NO	1.00	NO	1.00	NO	1.00					
	OMIT INTERIOR GB	NO	1.00	NO	1.00	NO	1.00					
	METHOD GB FASTER @ 4" o.c	NO	1.00	NO	1.00	NO	1.00					
HORIZONTAL BLOCKING OMITTED		NO	1.00	NO	1.00	NO	1.00					
REQUIRED BWP LENGTH (ft)		3.55		3.55		5.83						
ACTUAL BWP	CONTRIBUTING LENGTH	BWP	METHOD	LENGTH (ft)	METHOD	LENGTH (ft)	METHOD	LENGTH (ft)	METHOD	LENGTH (ft)	METHOD	LENGTH (ft)
		1	CS-WSP	4.00	CS-WSP	4.00	CS-WSP	4.00				
		2	CS-WSP	4.00	CS-WSP	4.00	CS-WSP	4.00				
		3	CS-WSP	4.00			CS-WSP	4.00				
		4	CS-WSP	4.00								
		5										
		6										
		7										
ACTUAL BWP LENGTH (ft)		16.00		8.00		12.00						
ACTUAL ≥ REQUIRED		YES		YES		YES						
SPACE	BWPs ≤ 20' APART		YES		YES		YES					
# of BWPs	Length of BWL (ft)		63.16		21.83		41.33					
	BWP 1 ≤ 16', 2 > 16'		YES		YES		YES					
ENDS	BWP WITHIN 10' OF END		YES	YES	YES	YES	YES	YES				
	CONTINUOUS END CONDITION		3	3	3	1	4	3				
BWL COMPLIANCE PASS-FAIL		PASS		PASS		PASS						

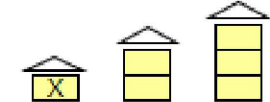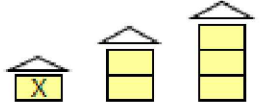WIND SPEED (MPH)		115		115		115		115		115		
BRACED WALL LINE		A		B		C						
STORY												
BRACED WALL PANEL METHOD		CS-WSP CS-PF CS-G		GB		CS-WSP CS-PF CS-G						
AVG BWL SPACING (ft)		21.83		41.33		32						
TABULAR REQUIRED (ft)		2.92		7.25		4.80						
ADJUSTMENT	EXPOSURE	C	1.20	C	1.20	C	1.20	C		C		
	EAVE-RIDGE HT (ft)	7.00	0.82	7.00	0.82	7.00	0.82					
	STORY HEIGHT (ft)	9.00	0.95	9.00	0.95	9.00	0.95					
	# BWLs	3.00	1.30	3.00	1.30	3.00	1.30					
	ADD PAIR 800# HOLD DOWNS	NO	1.00	NO	1.00	NO	1.00					
	OMIT INTERIOR GB	NO	1.00	NO	1.00	NO	1.00					
	METHOD GB FASTEN @ 4" o.c	NO	1.00	NO	1.00	NO	1.00					
HORIZONTAL BLOCKING OMITTED		NO		NO		NO						
REQUIRED BWP LENGTH (ft)		3.55		8.81		5.83						
ACTUAL BWP	CONTRIBUTING LENGTH	BWP	METHOD	LENGTH (ft)	METHOD	LENGTH (ft)	METHOD	LENGTH (ft)	METHOD	LENGTH (ft)	METHOD	LENGTH (ft)
		1	CS-WSP	4.00	DS - GB	5.83	CS-WSP	4.00				
		2	CS-WSP	4.00	DS - GB	6.00	CS-WSP	4.00				
		3	CS-WSP	4.00	CS-WSP	6.67						
		4										
		5										
		6										
	7											
ACTUAL BWP LENGTH (ft)		12.00		18.50		8.00						
ACTUAL ≥ REQUIRED		YES		YES		YES						
SPACE	BWPs ≤ 20' APART	YES		YES		YES						
# of BWPs	Length of BWL (ft)	38.67		38.67		28						
	BWP 1 ≤ 16', 2 ≥ 16'	YES		YES		YES						
ENDS	BWP WITHIN 10' OF END	YES	YES	YES	YES	YES	YES					
	CONTINUOUS END CONDITION	3	3	3	3	4	3					
BWL COMPLIANCE PASS-FAIL		PASS		PASS		PASS						

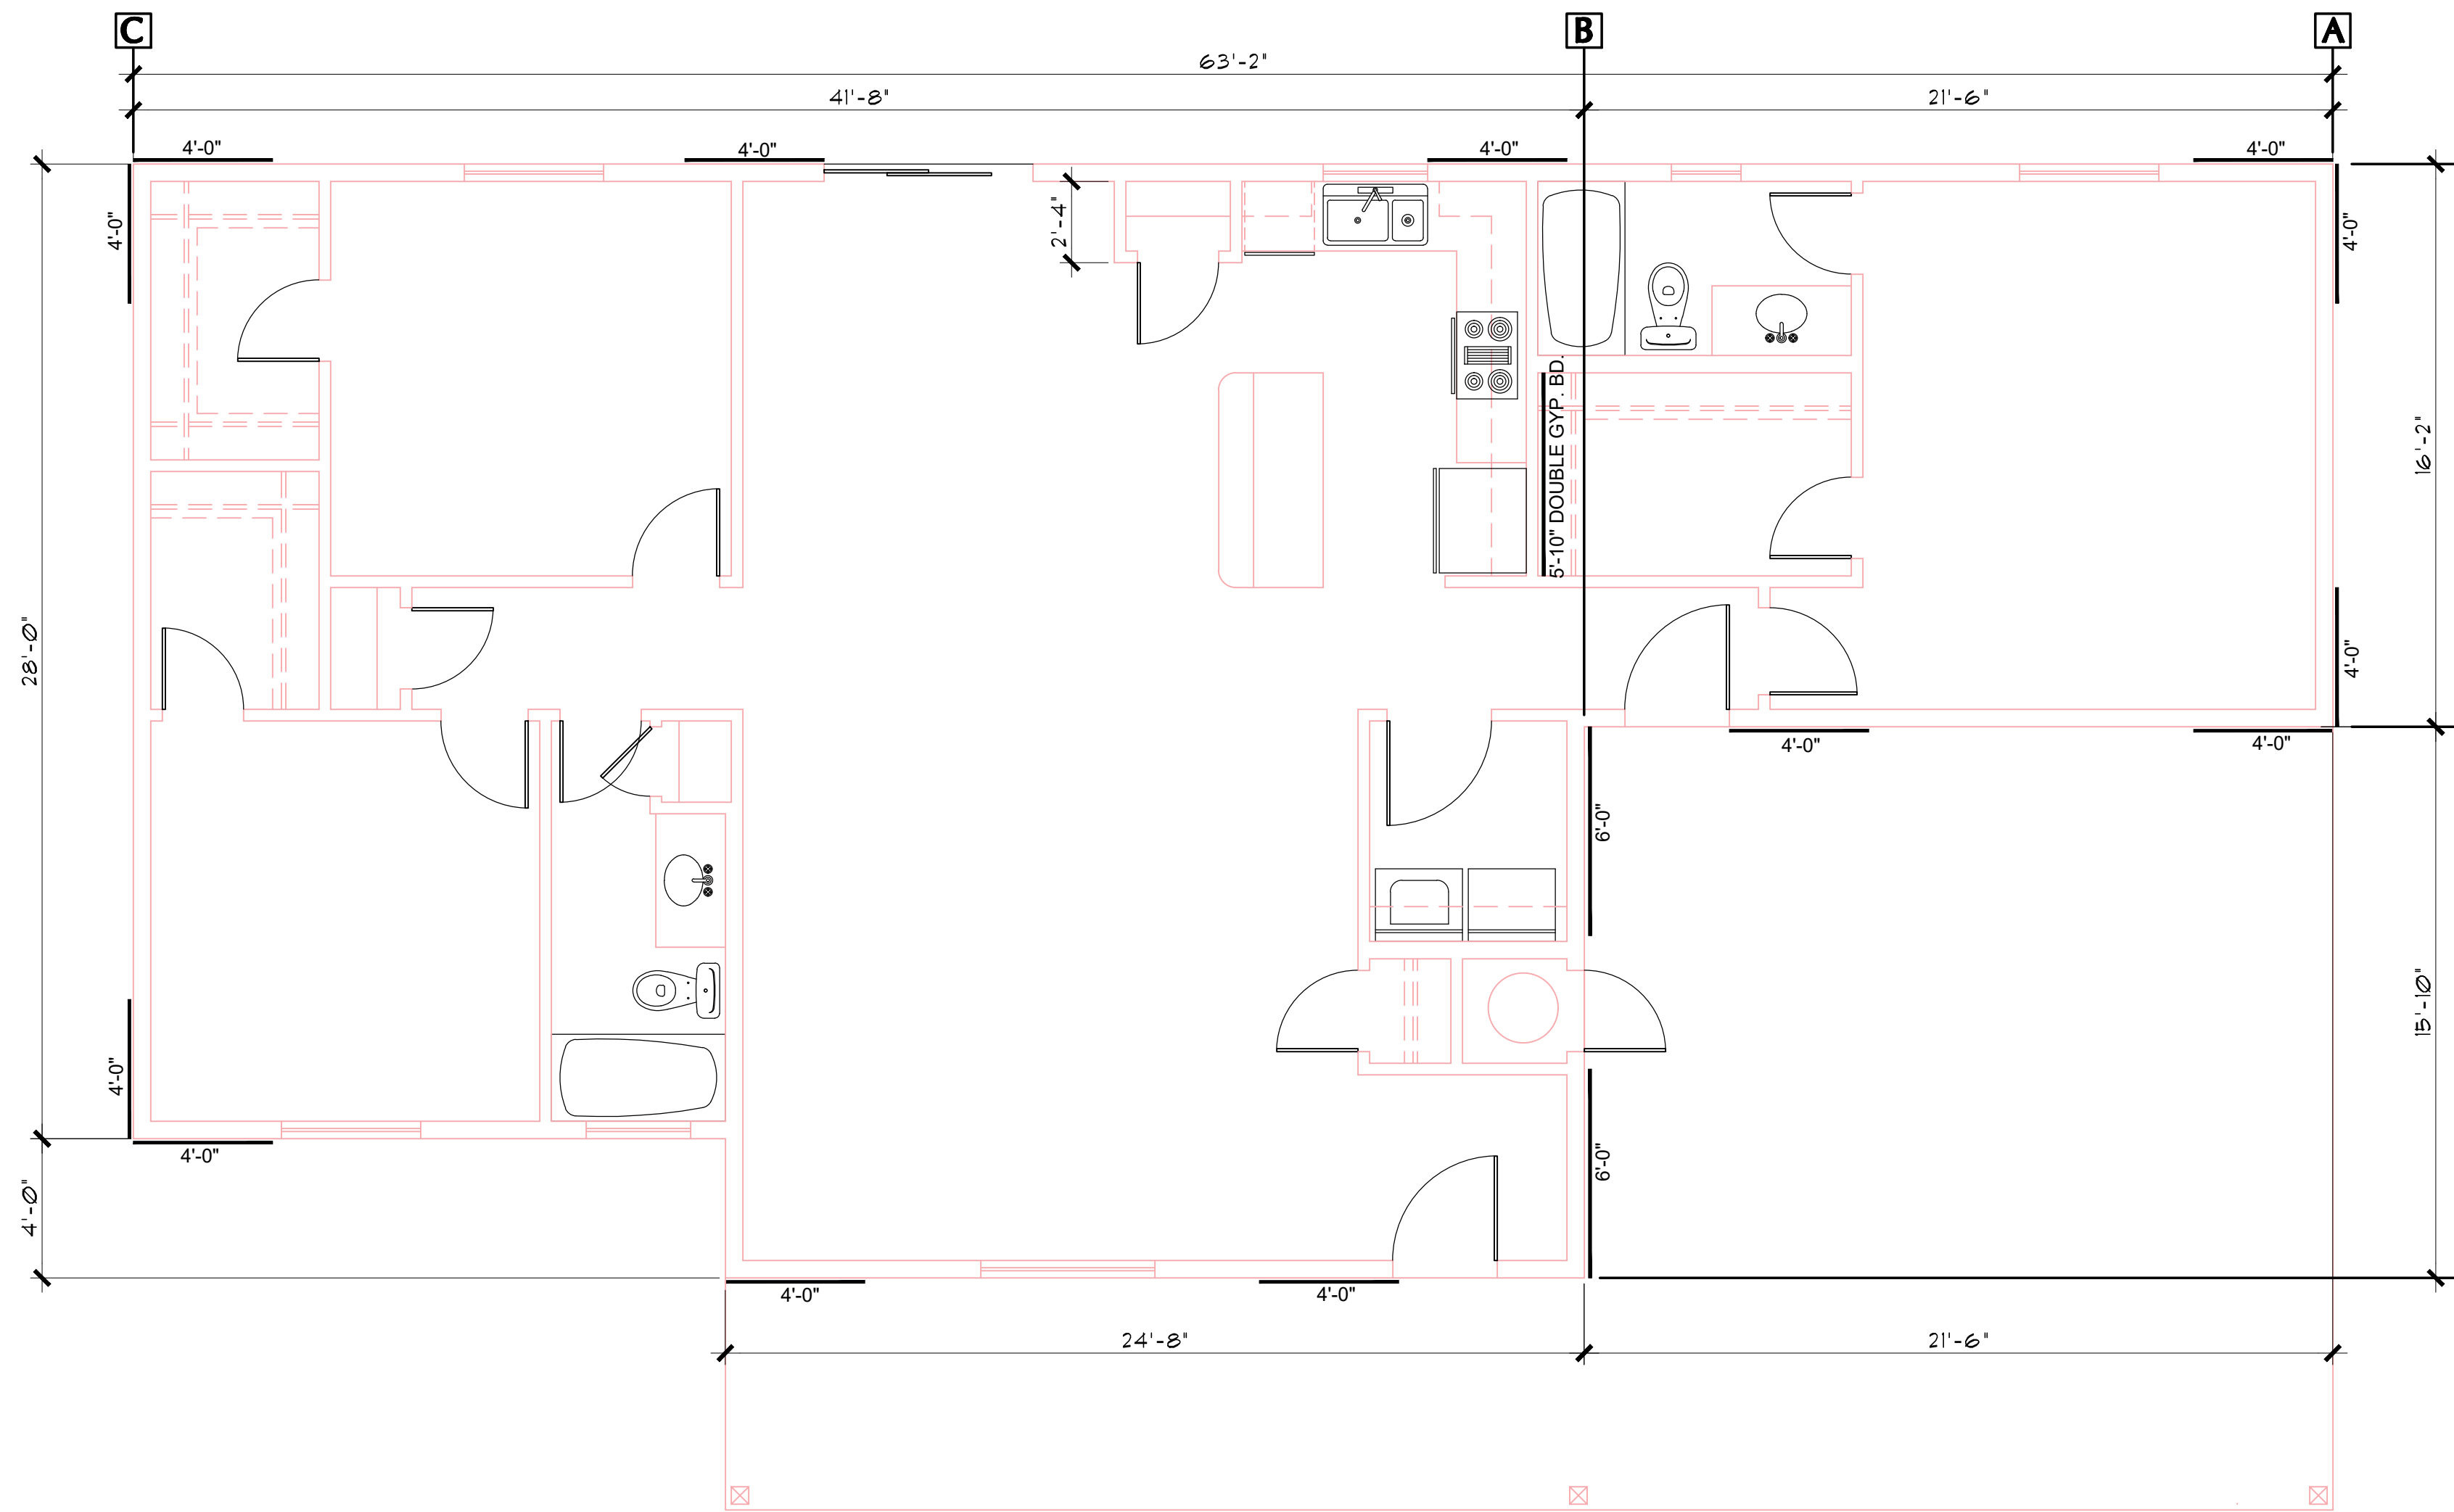

BRACE WALL PLAN (with Carport option)

SCALE: 1/4" = 1'-0"

OPTIONS FOR EXTERIOR SIDING-
OPTION #1:
5/8" THICK T1-11, SIDING, 12" MINIMUM GROOVE SPACING. THE
T1-11 MAY SERVE AS THE BRACE WALL PANELS, PROVIDED
THE CODE REQUIRED NAILING PATTERN IS APPLIED.
SEE DETAIL #1, A-6.0

OPTION #2:
MINIMUM 3/8" THICK "LP SMART SIDING". (SEE DTL. #1, A-6.0)

OPTION #3:
STUCCO OVER WEATHER BARRIER, OVER 1/2" PLYWOOD
(SEE DETAIL #2, A-6.0)

OPTION #4:
HORIZ. SIDING OVER WEATHER BARRIER, OVER 1/2" PLYWOOD
SEE DETAIL #3, A-6.0)

Job no. : 3BD/2BA RIGHT
Date : 05/24/2024
Drawn by: MFR
Chk'd by: MFR
Scale : AS NOTED
Revisions:

This design is the property of Mark Rogers, Architect, PLLC, and the drawings are the property of Yavapai County Government, and are not to be reproduced, copied in whole or in part. It is only to be used for the project and site specifically identified herein and is not to be used on any other project. It is to be returned upon request.

Scales as stated hereon are valid on the original drawing only. Contractor shall carefully review all dimensions and conditions shown hereon and at once report to the Architect any error, inconsistency or omission he may discover.



Mark Rogers, Architect, PLLC

◆ ◆ ◆ Chino Valley, Arizona 86323
Phone: (928) 848-3516
markrogers914@gmail.com

761 Highland Circle

1015 FAIR STREET
PRESCOTT, ARIZONA

YAVAPAI COUNTY, ARIZONA

BRACE WALL PLAN - CARPORT OPTION
CALCULATIONS
PHASE TWO - 3 BDRM / 2 BATH - RIGHT PARKING

YAVAPAI COUNTY, ARIZONA


A-4.

A-4.1

REVIEWED FOR DESIGN
CRITERIA ONLY


SEE ATTACHED COVER SHEET FOR ALL
STAMPS. IT IS THE RESPONSIBILITY OF THE
OWNER/APPLICANT TO REVIEW AND
ACKNOWLEDGE APPLICABLE STAMPS.

PROPERTY OF YAVAPAI COUNTY, AZ

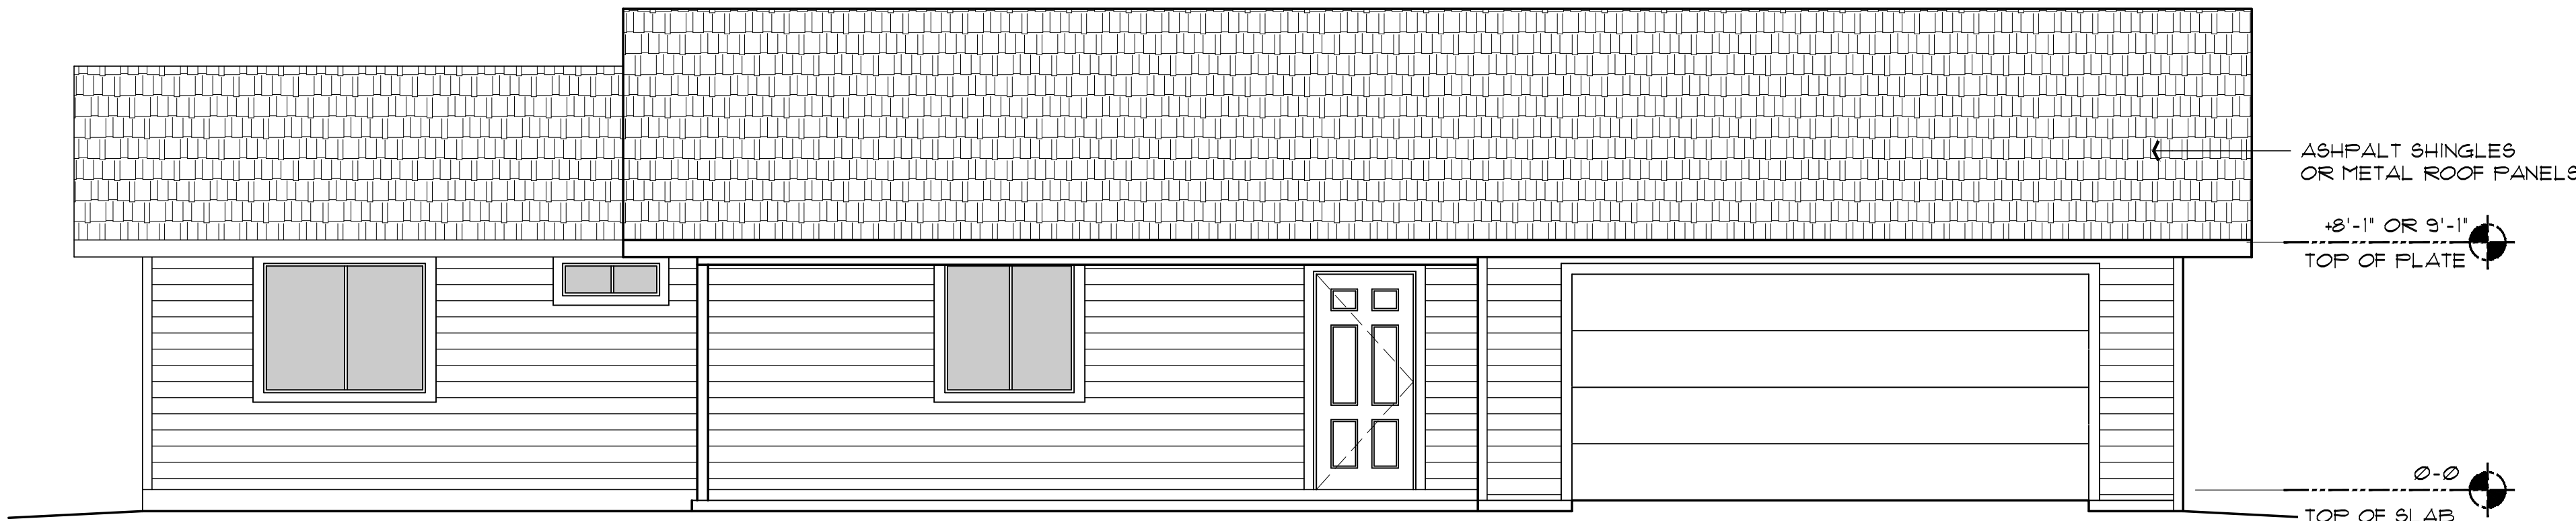


FRONT ELEVATION (with optional Garage)

SCALE: 1/4" = 1'-0"

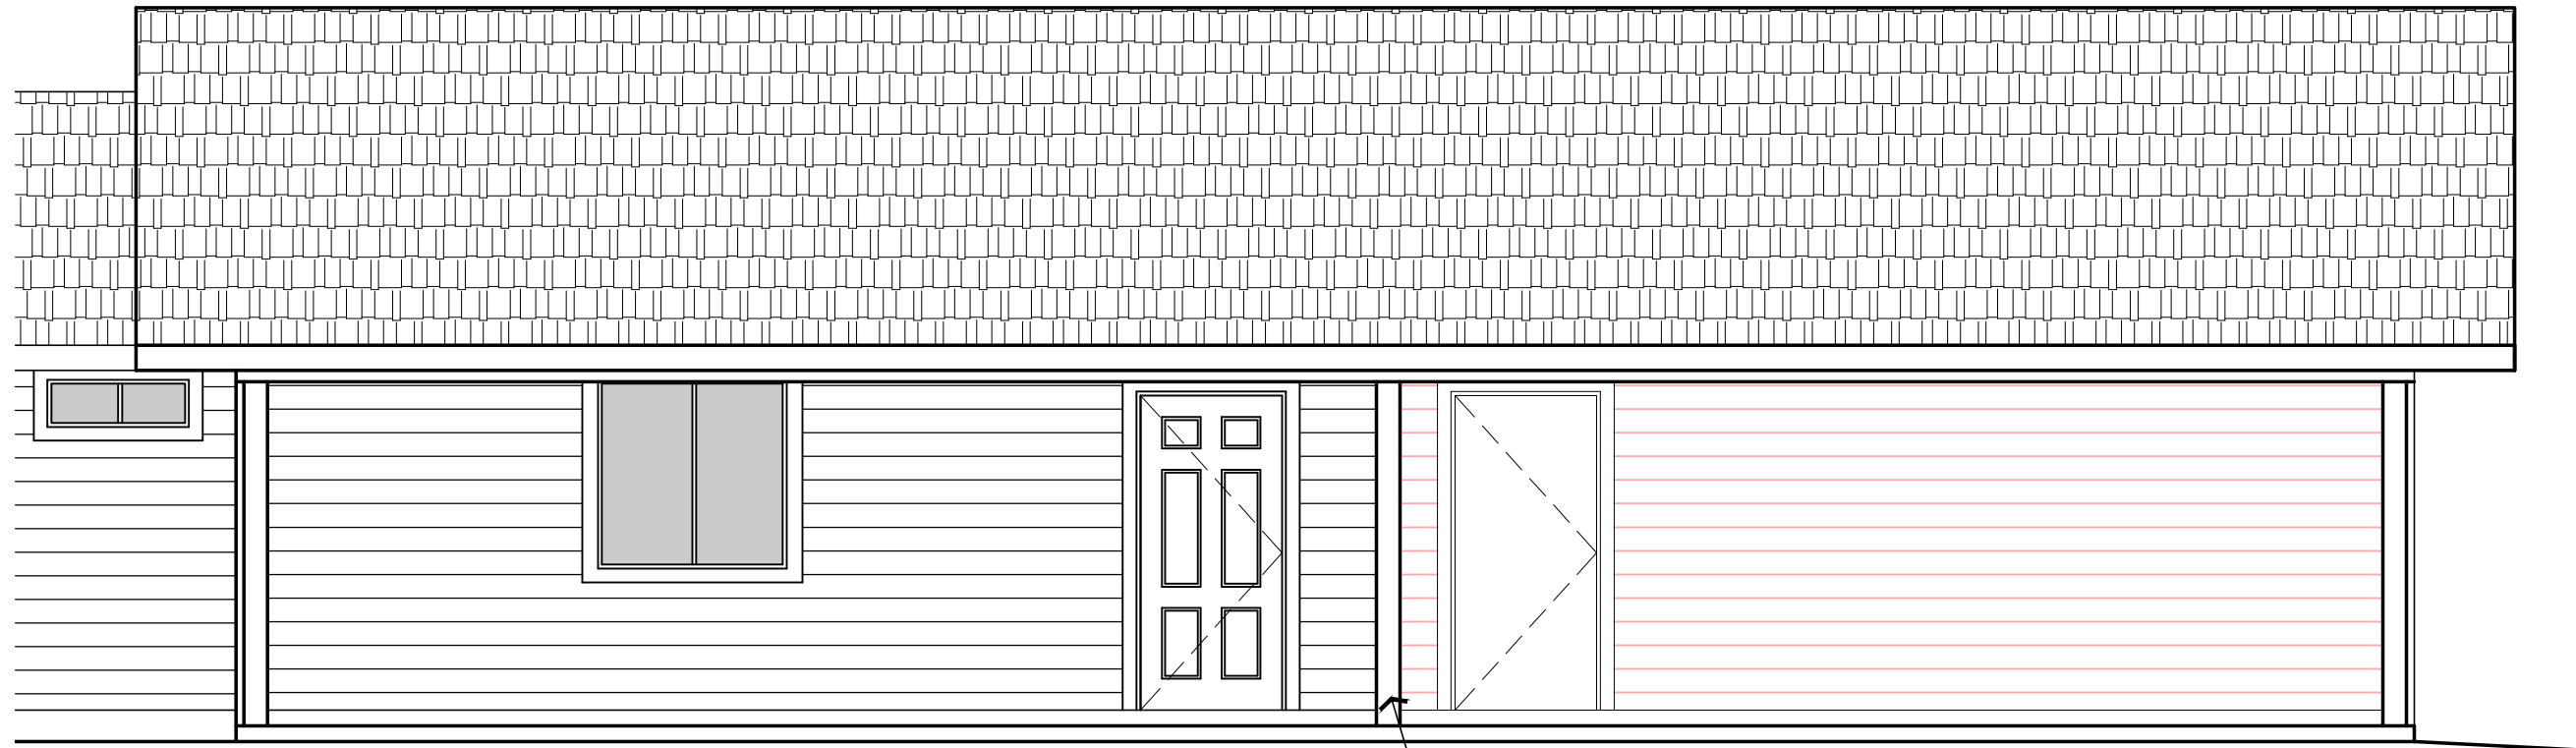


PARTIAL FRONT ELEVATION (with optional Carport)

SCALE: 1/4" = 1'-0"

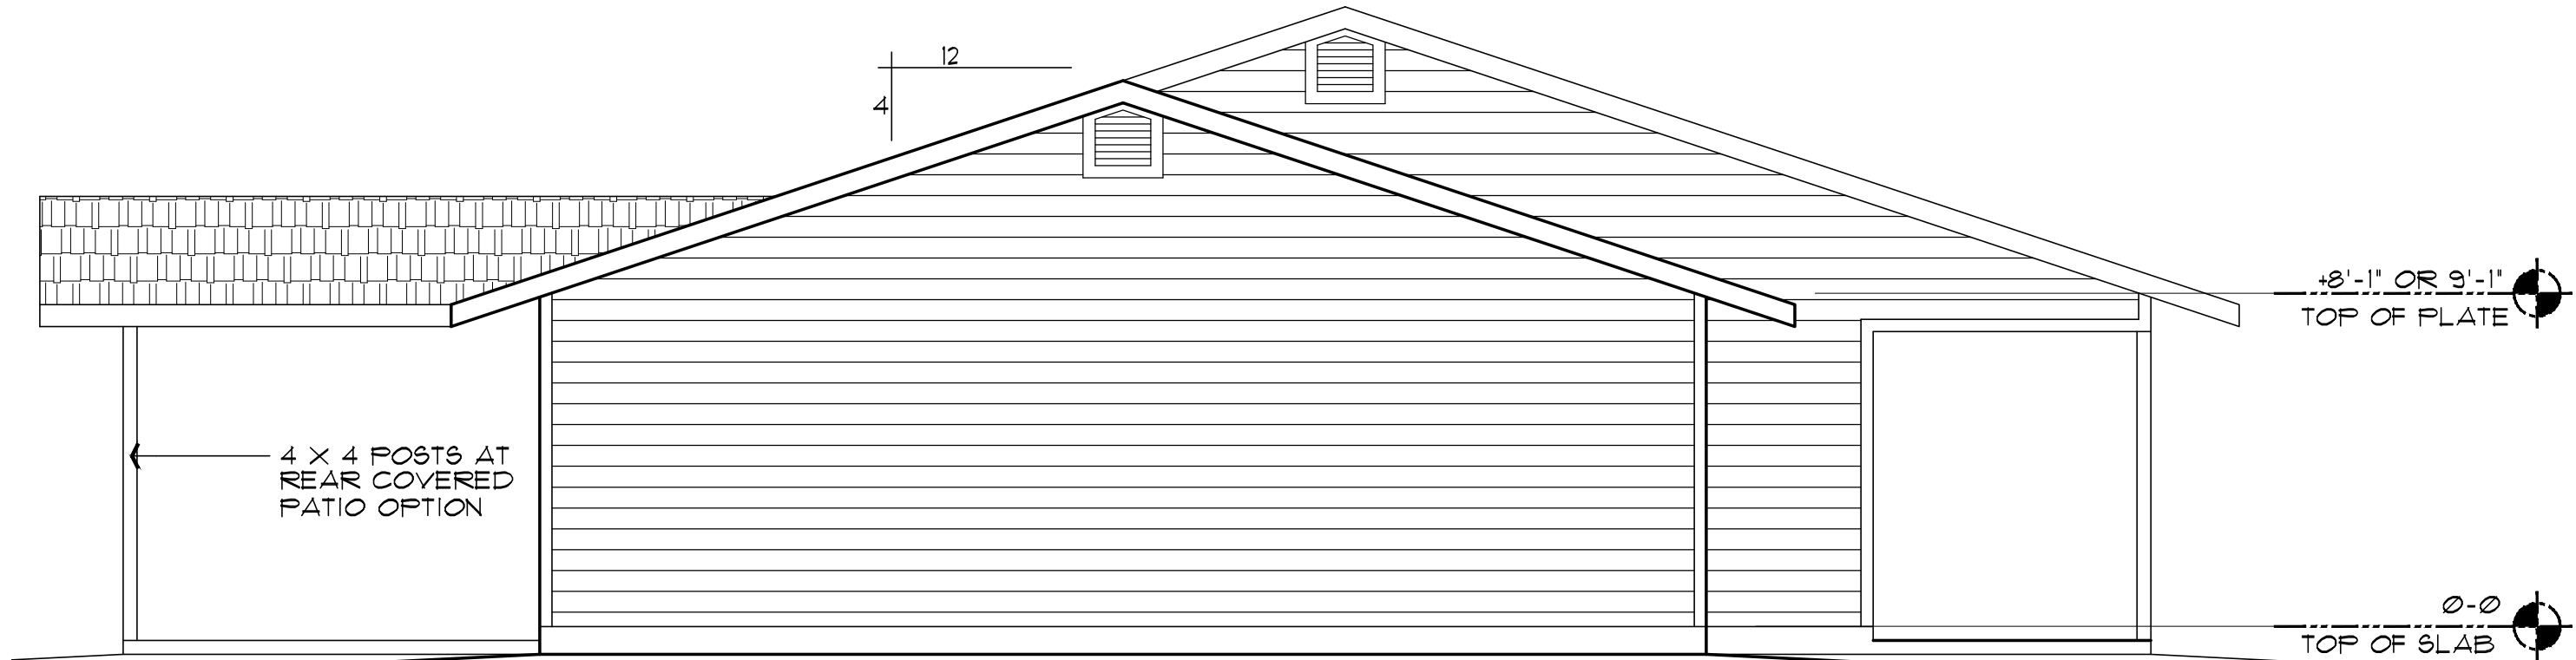


LEFT SIDE ELEVATION (same with both options)

SCALE: 1/4" = 1'-0"

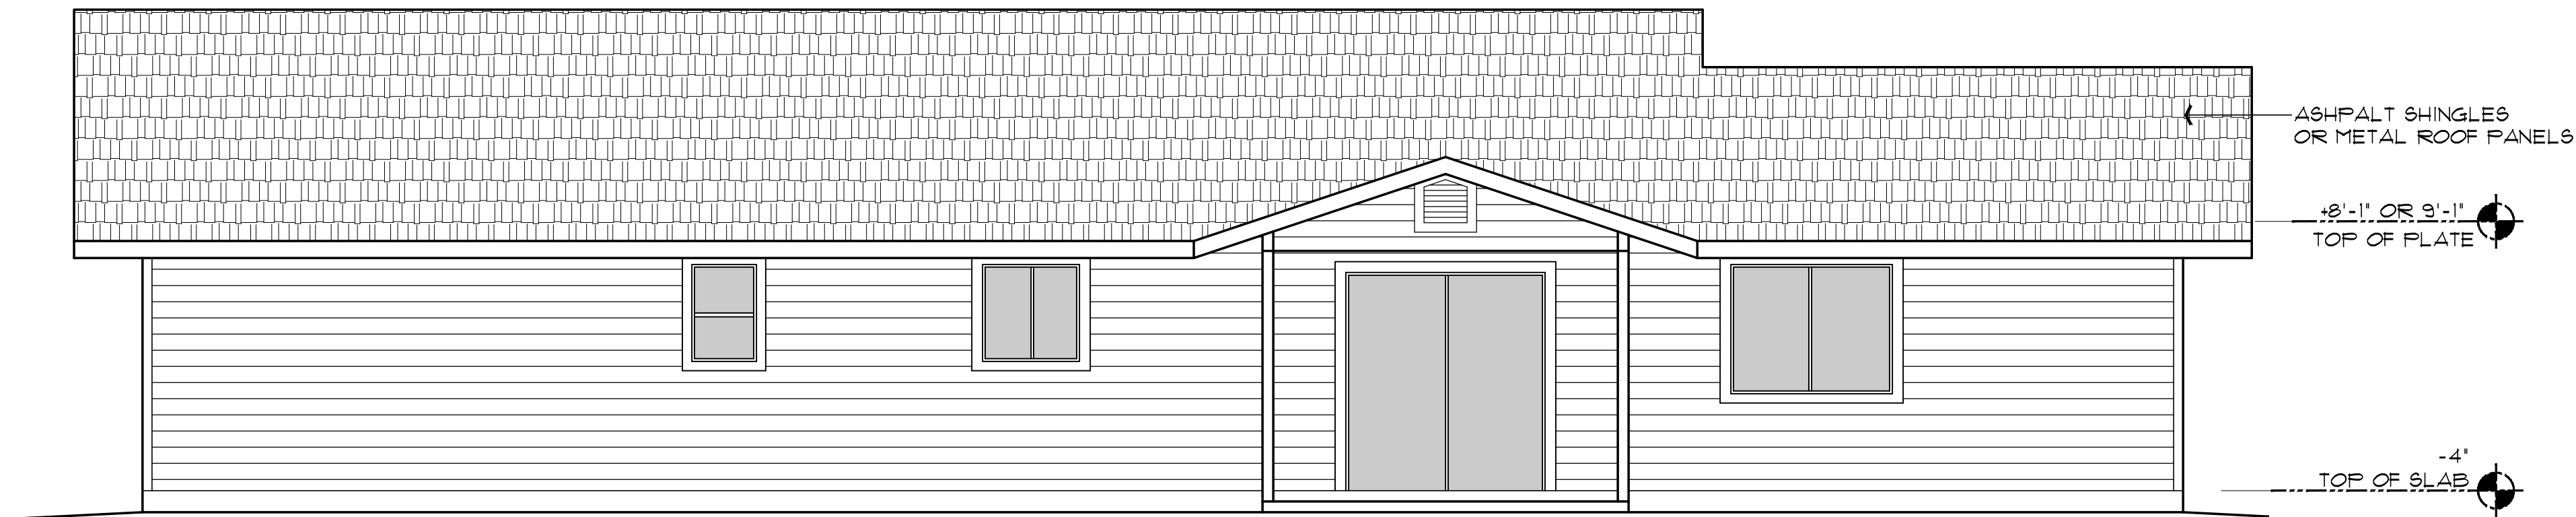


REAR ELEVATION (with optional Garage)

SCALE: 1/4" = 1'-0"

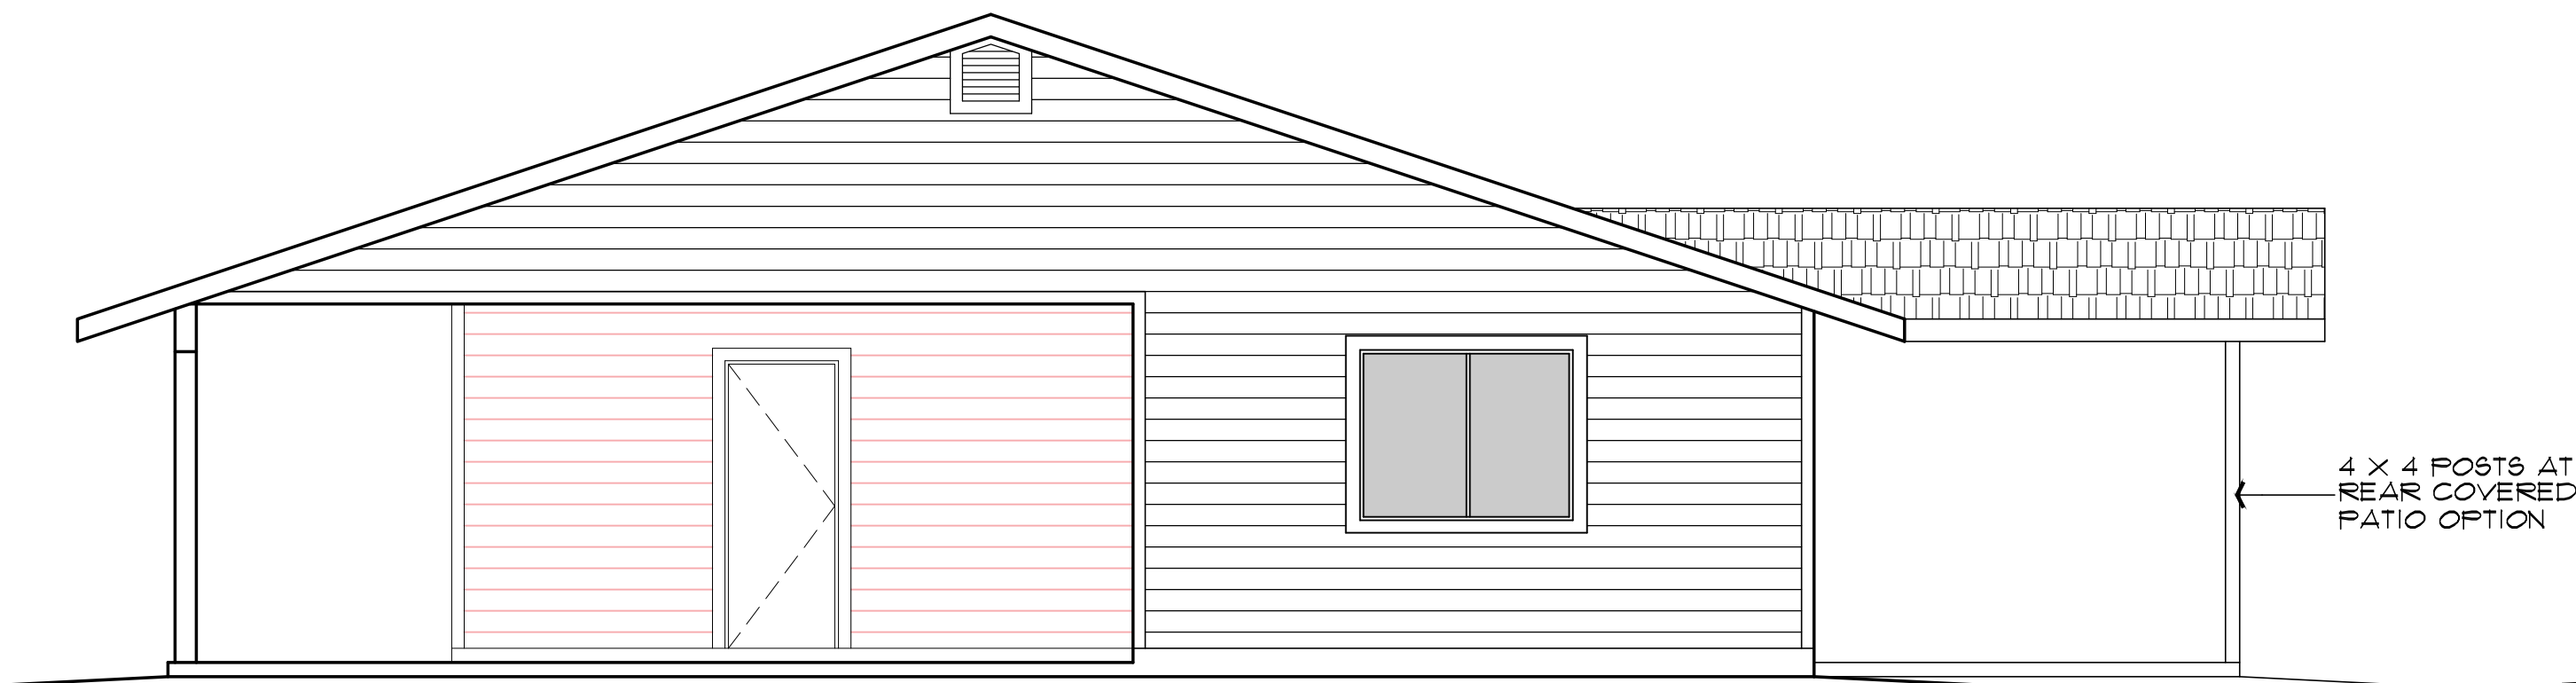

RIGHT SIDE ELEVATION (with optional Carport)

SCALE: 1/4" = 1'-0"

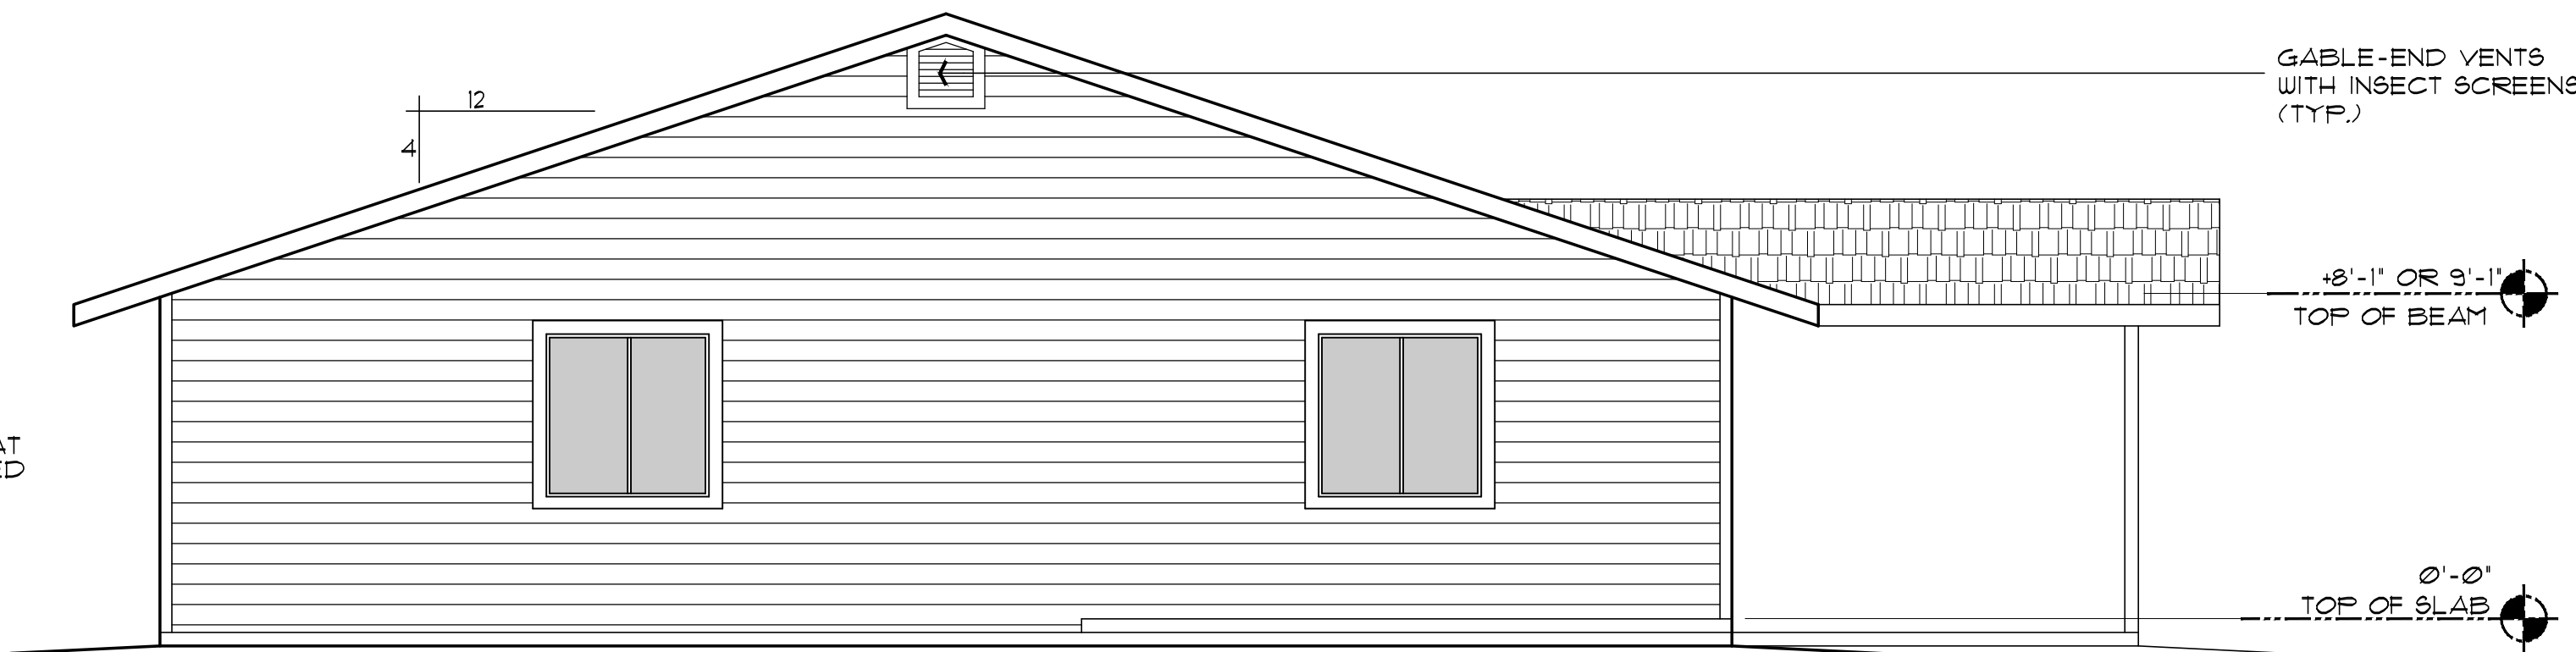

RIGHT SIDE ELEVATION (with Garage option)

SCALE: 1/4" = 1'-0"

Job no. : 3BD/2BA RIGHT
Date : 05/24/2024
Drawn by: MFR
Chk'd by: MFR
Scale : AS NOTED
Revisions:

This design is the property of Mark Rogers, Architect, PLLC, and the drawings are the property of Yavapai County Government, and are not to be reproduced, or copied in whole or in part. It is only to be used for the project and site specifically identified herein and is not to be used on any other project. It is to be returned upon request.
Scales as stated hereon are valid on the original drawing only. Contractor shall carefully review all dimensions and conditions shown hereon and at once report to the Architect any error, inconsistency or omission he may discover.



Mark Rogers, Architect, PLLC

761 Highland Circle
Chino Valley, Arizona 86323
Phone: (928) 848-3516
markrogers914@gmail.com

EXTERIOR ELEVATIONS
PHASE TWO - 3 BDRM / 2 BATH - RIGHT PARKING

YAVAPAI COUNTY, ARIZONA

1015 FAIR STREET
PRESCOTT, ARIZONA

SHEET NO:


A-5.0

PROPERTY OF YAVAPAI COUNTY, AZ


REVIEWED FOR DESIGN
CRITERIA ONLY

SEE ATTACHED COVER SHEET FOR ALL
STAMPS. IT IS THE RESPONSIBILITY OF THE
OWNER/APPLICANT TO REVIEW AND
ACKNOWLEDGE APPLICABLE STAMPS.


ASPHALT SHINGLES, OR METAL ROOFING,
OVER 15" FELT, ON EXT. GRADE PLYWOOD,
OR OSB SHEATHING.
ON PRE-ENGINEERED WOOD TRUSSES AT 24" O.C.
ATTACH ROOF SHEATHING W/ 8d COMMON
NAIL (2 1/2" X Ø131) 6" O.C. AT EDGES,
12" O.C. FOR INTERMEDIATE SUPPORTS.
PER IRC TABLE R602.3(1)

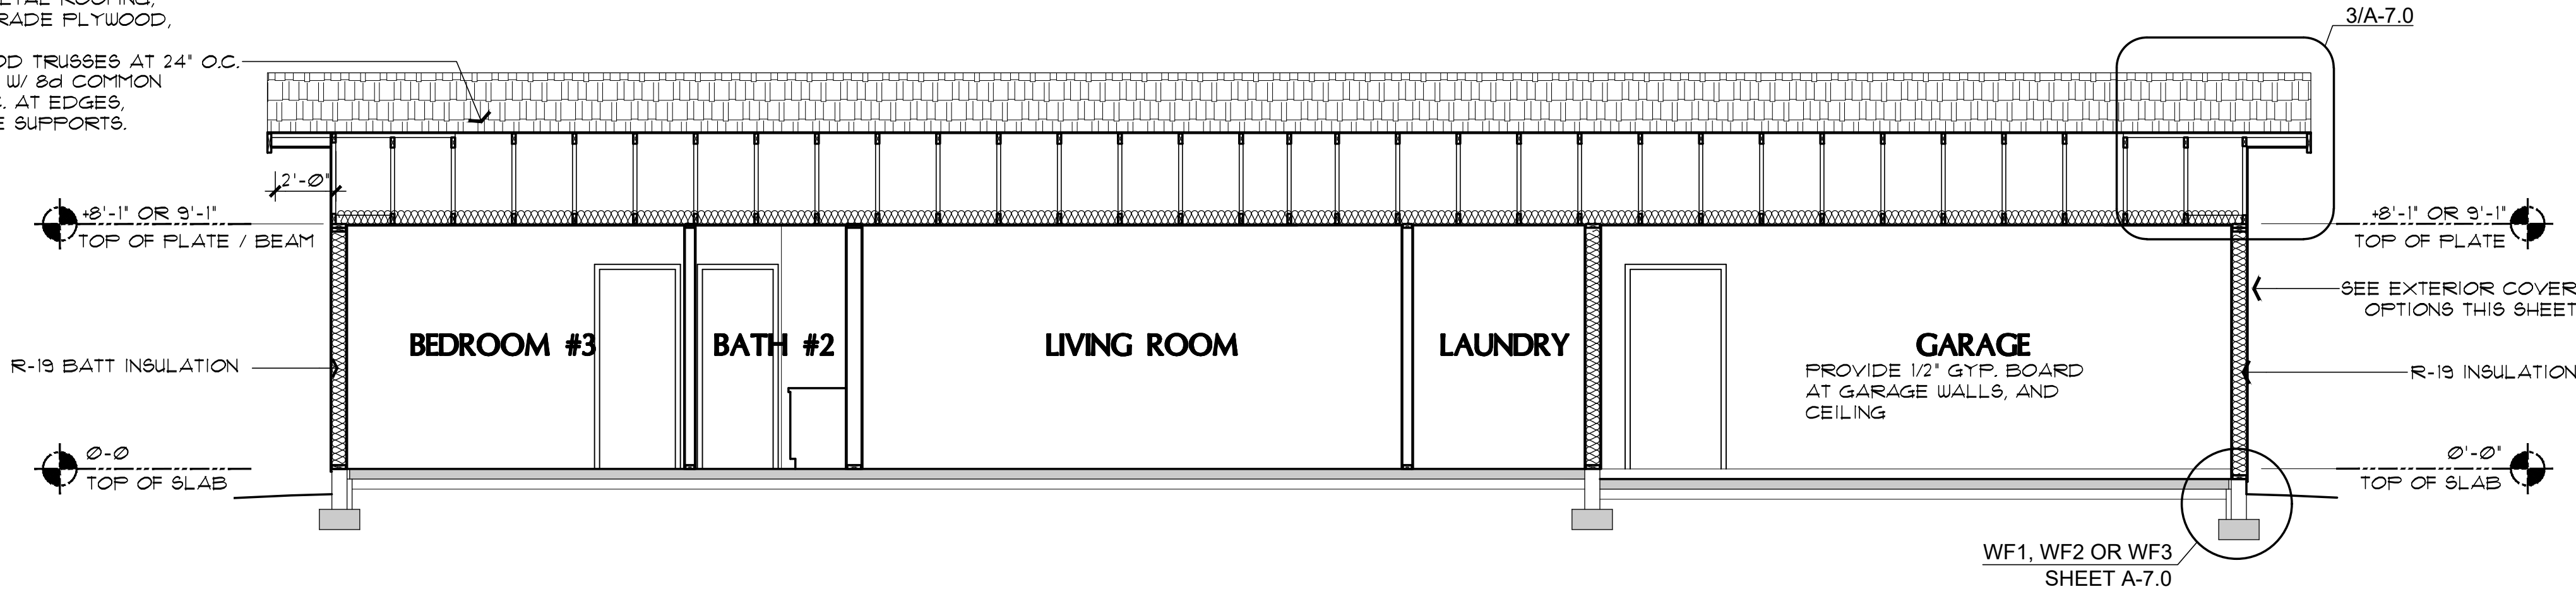


A BUILDING CROSS SECTION
SCALE: 3/8" = 1'-0"

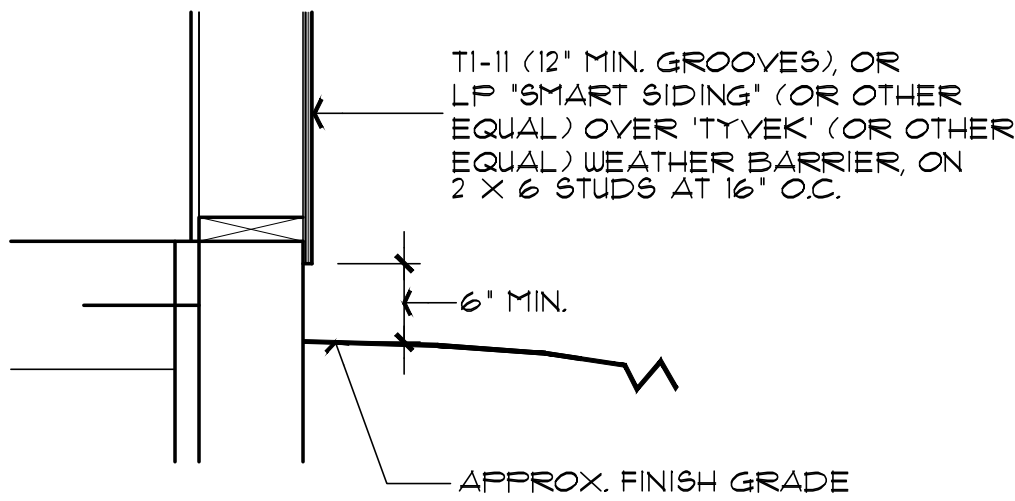


1 T1-11, OR "SMART SIDING" OPTIONS DETAIL
NO SCALE

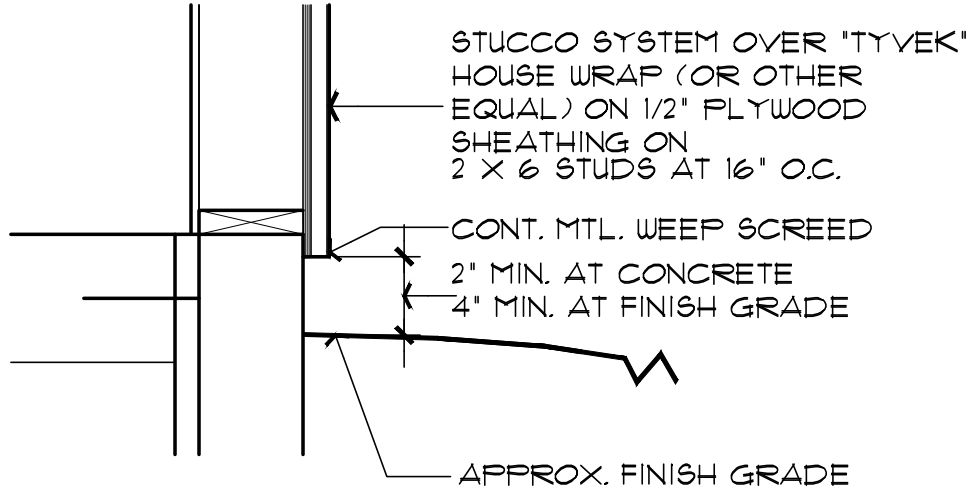


2 STUCCO OPTION DETAIL
NO SCALE

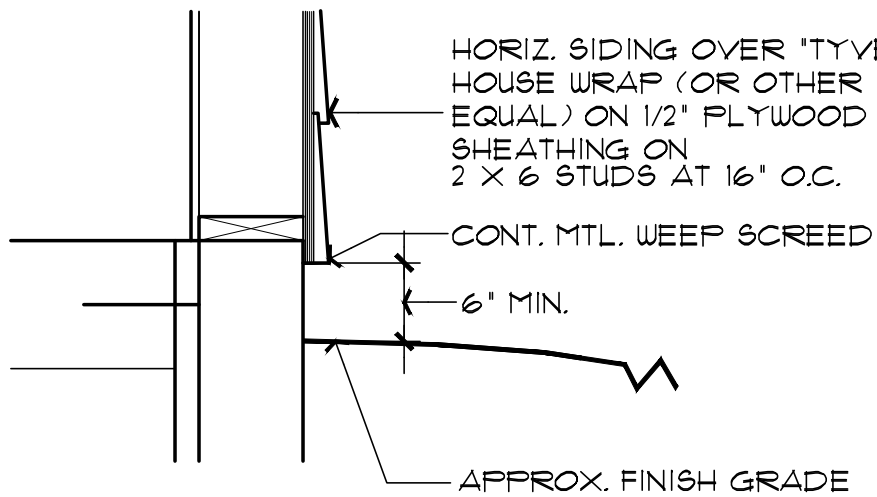

3 HORIZ. SIDING OPTION DETAIL
NO SCALE

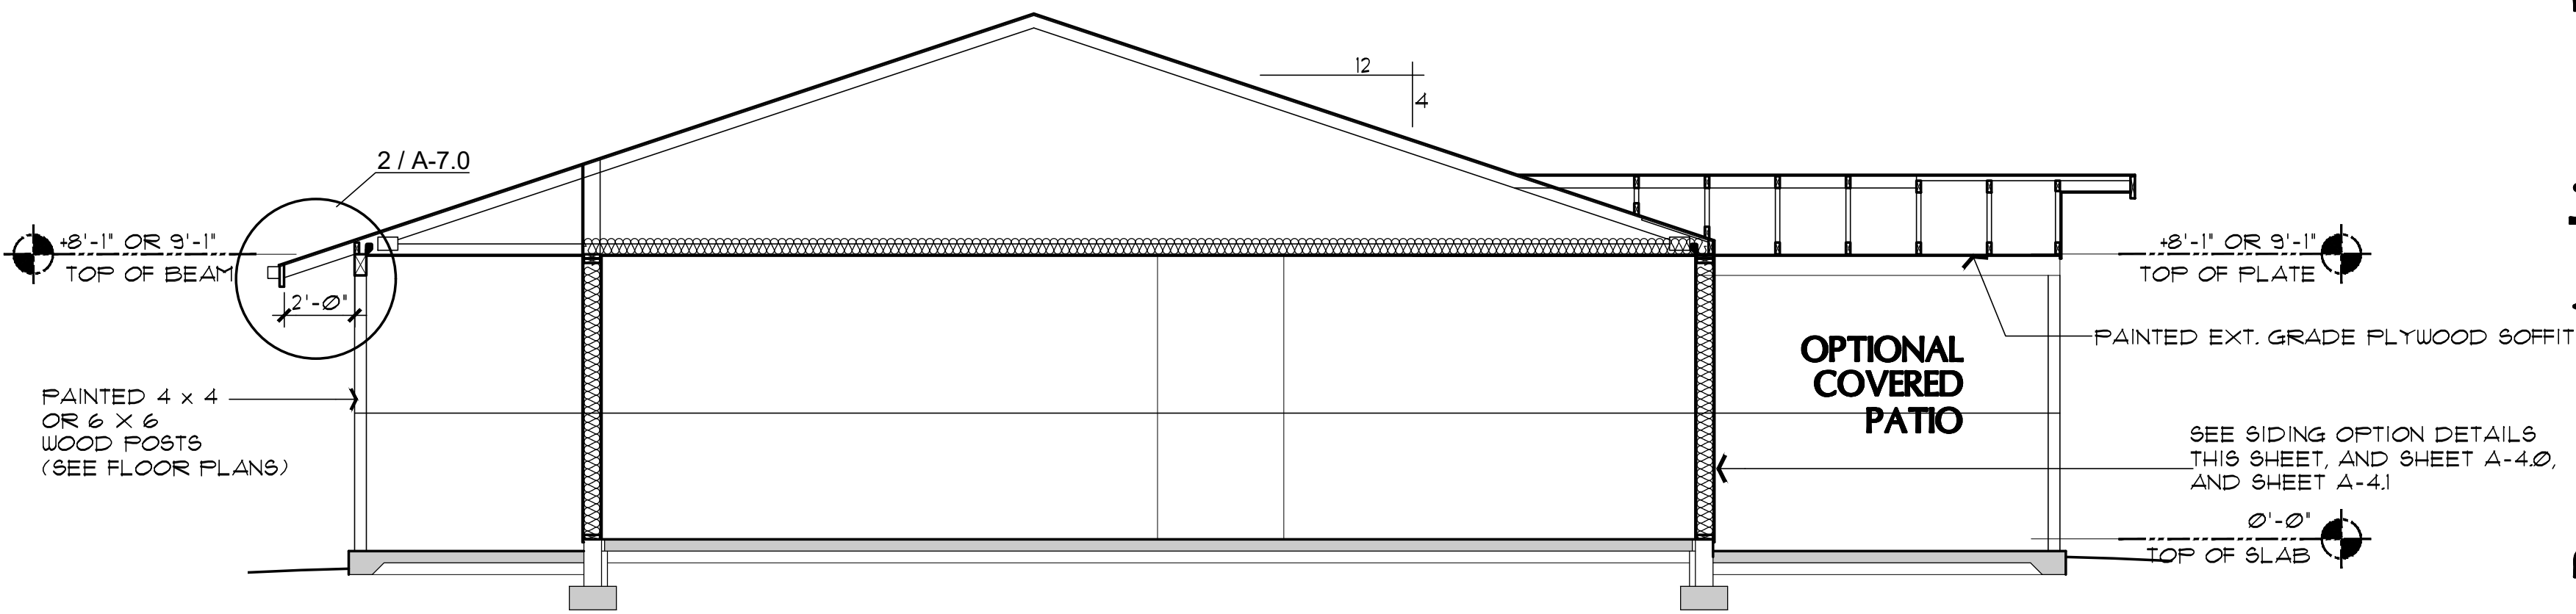

B BUILDING CROSS SECTION
SCALE: 1/4" = 1'-0"

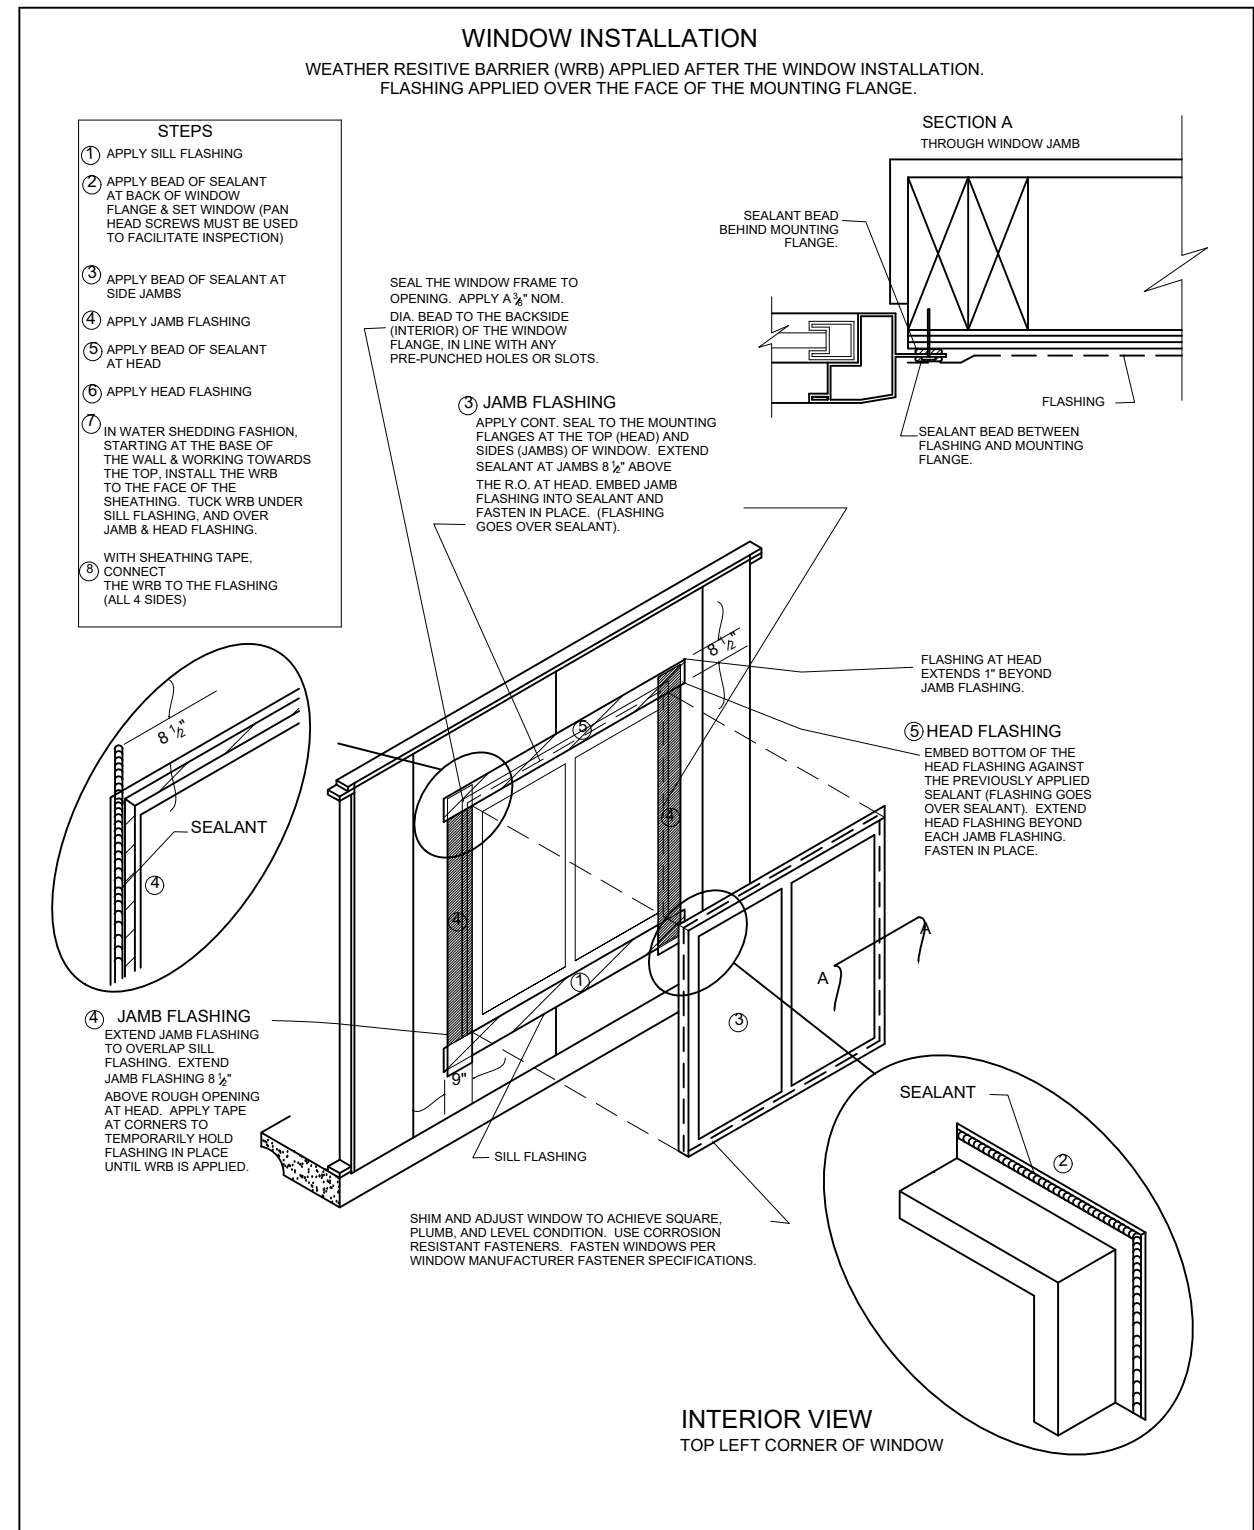

Job no. : 3BD/2BA RIGHT
Date : 05/24/2024
Drawn by: MFR
Chk'd by: MFR
Scale : AS NOTED
Revisions:

This design is the property of Mark Rogers, Architect, PLLC, and the drawings are the property of Yavapai County Government, and are not to be reproduced, or copied in whole or in part. It is only to be used for the project and site specifically identified herein and is not to be used on any other project. It is to be returned upon request.

Scales as stated herein are valid on the original drawing only. Contractor shall carefully review all dimensions and conditions shown herein and at once report to the Architect any error, inconsistency or omission he may discover.



Mark Rogers, Architect, PLLC

32616
MARK F. ROGERS
Chino Valley, Arizona
Phone: (928) 848-3516
markrogers914@gmail.com

BUILDING SECTIONS
PHASE TWO - 3 BDRM / 2 BATH - RIGHT PARKING

YAVAPAI COUNTY, ARIZONA

1015 FAIR STREET
PRESCOTT, ARIZONA


SHEET NO:

A-6.0


REVIEWED FOR DESIGN
CRITERIA ONLY

SEE ATTACHED COVER SHEET FOR ALL
STAMPS. IT IS THE RESPONSIBILITY OF THE
OWNER/APPLICANT TO REVIEW AND
ACKNOWLEDGE APPLICABLE STAMPS.

PROPERTY OF YAVAPAI COUNTY, AZ

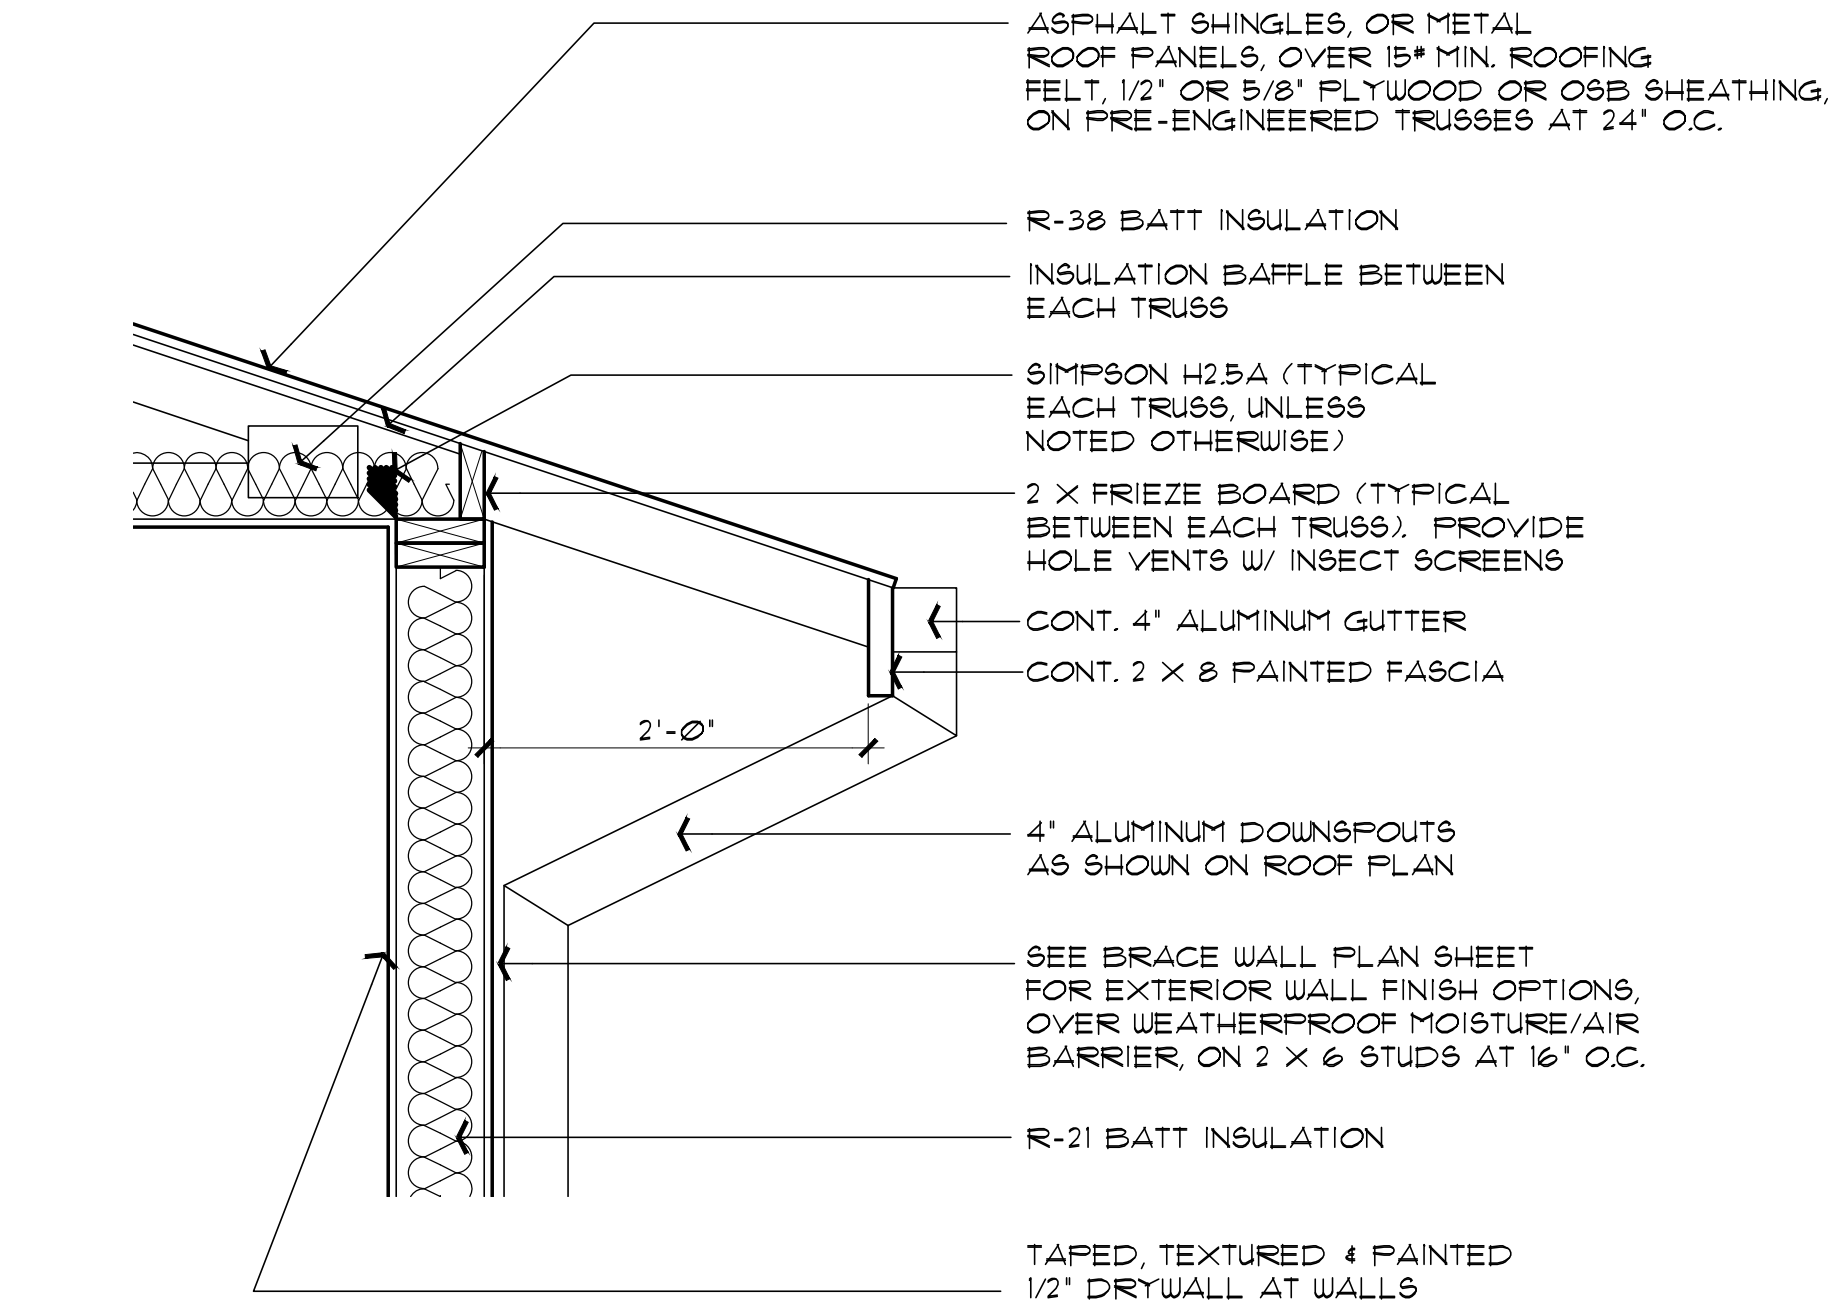


1 ROOF OVERHANG DETAIL
SCALE: 1" = 1'-0"

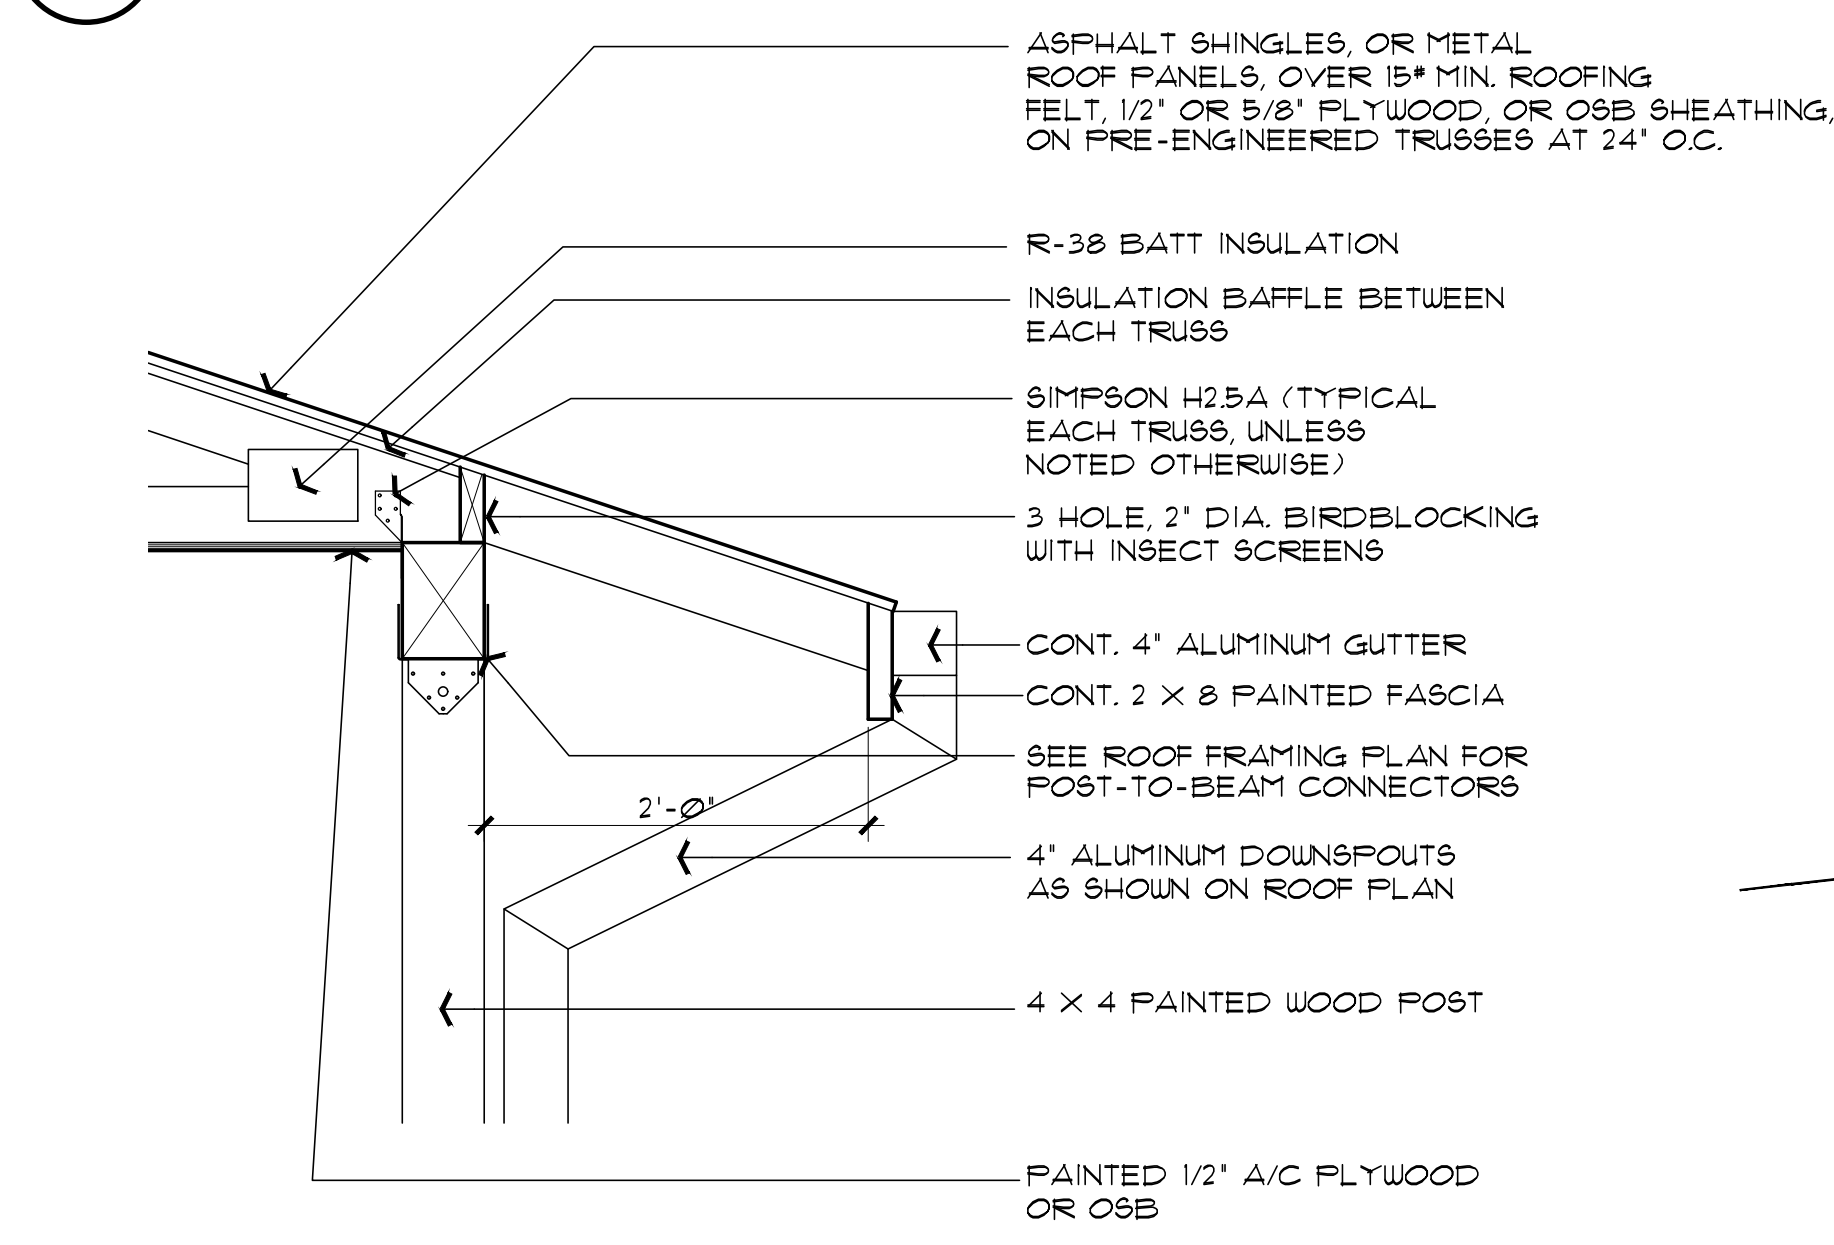


2 ROOF OVERHANG AT BEAM DETAIL
SCALE: 1" = 1'-0"

ATTACH ROOF SHEATHING W/ 8d COMMON
NAIL (2 1/2" X 0.131") 6" O.C. AT EDGES,
12" O.C. FOR INTERMEDIATE SUPPORTS.
PER IRC TABLE R602.3(1)

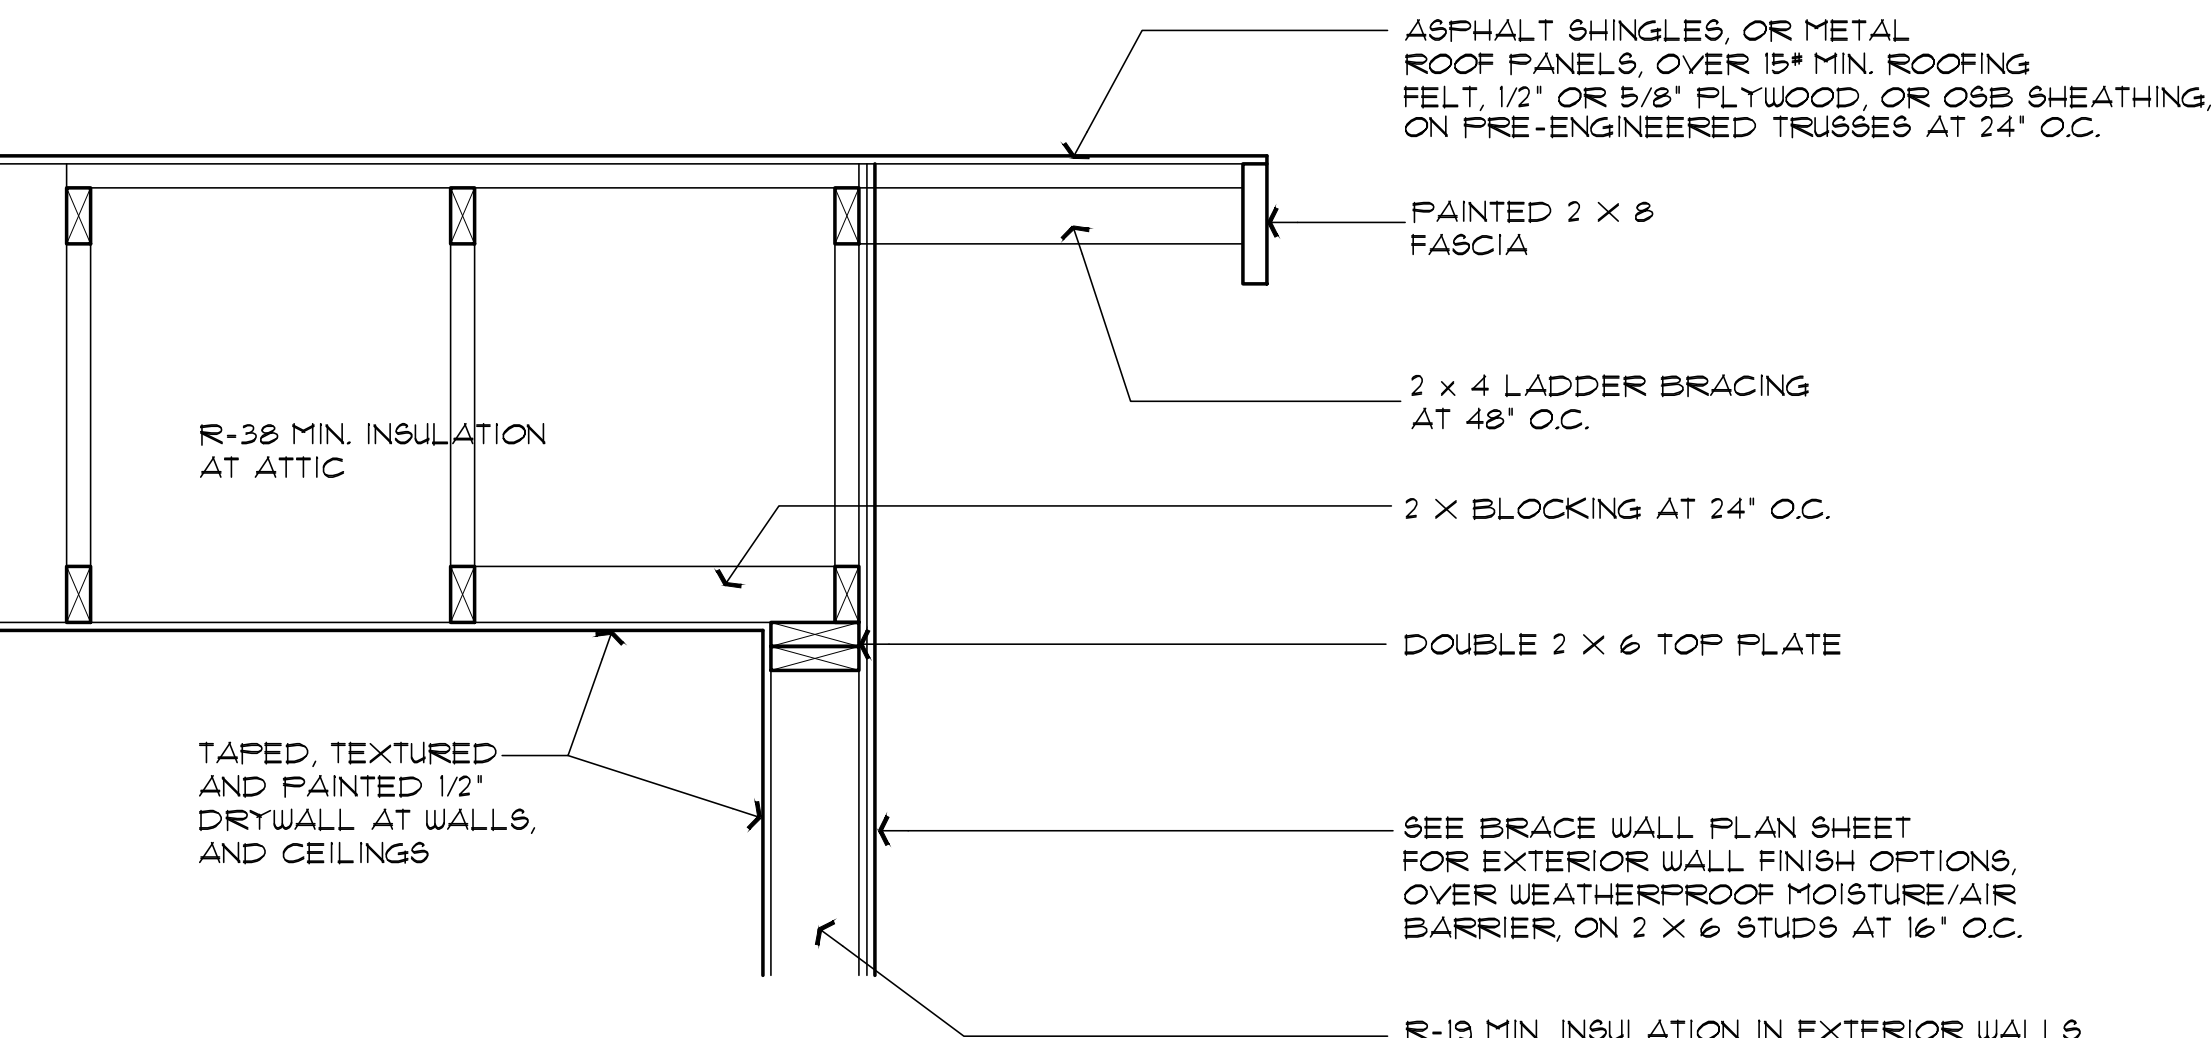


3 GABLE END-WALL DETAIL
SCALE: 1" = 1'-0"


PROPERTY OF YAVAPAI COUNTY, AZ

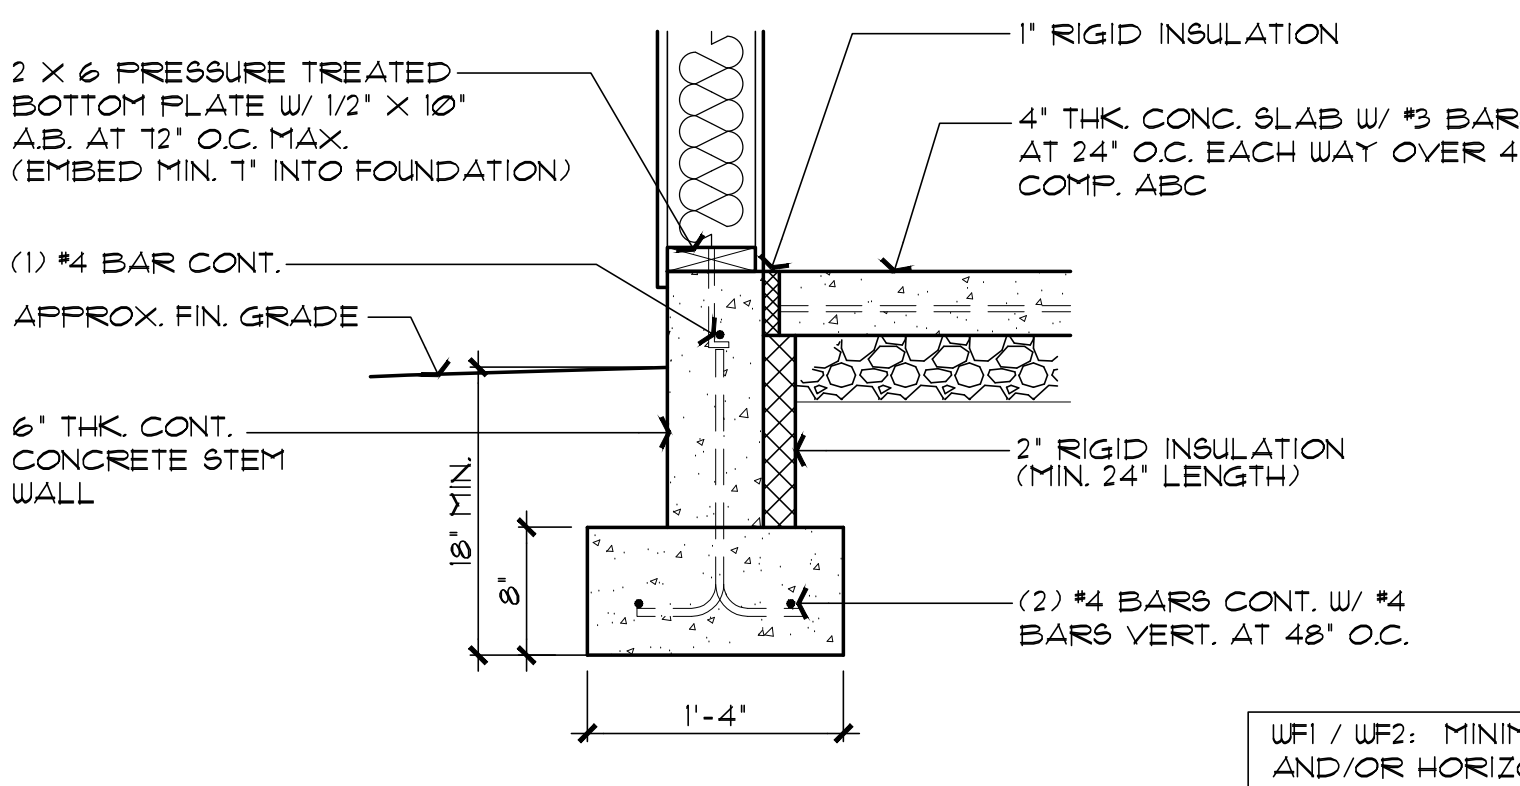

WF1 CONCRETE STEM WALL OPTION
SCALE: 1" = 1'-0"

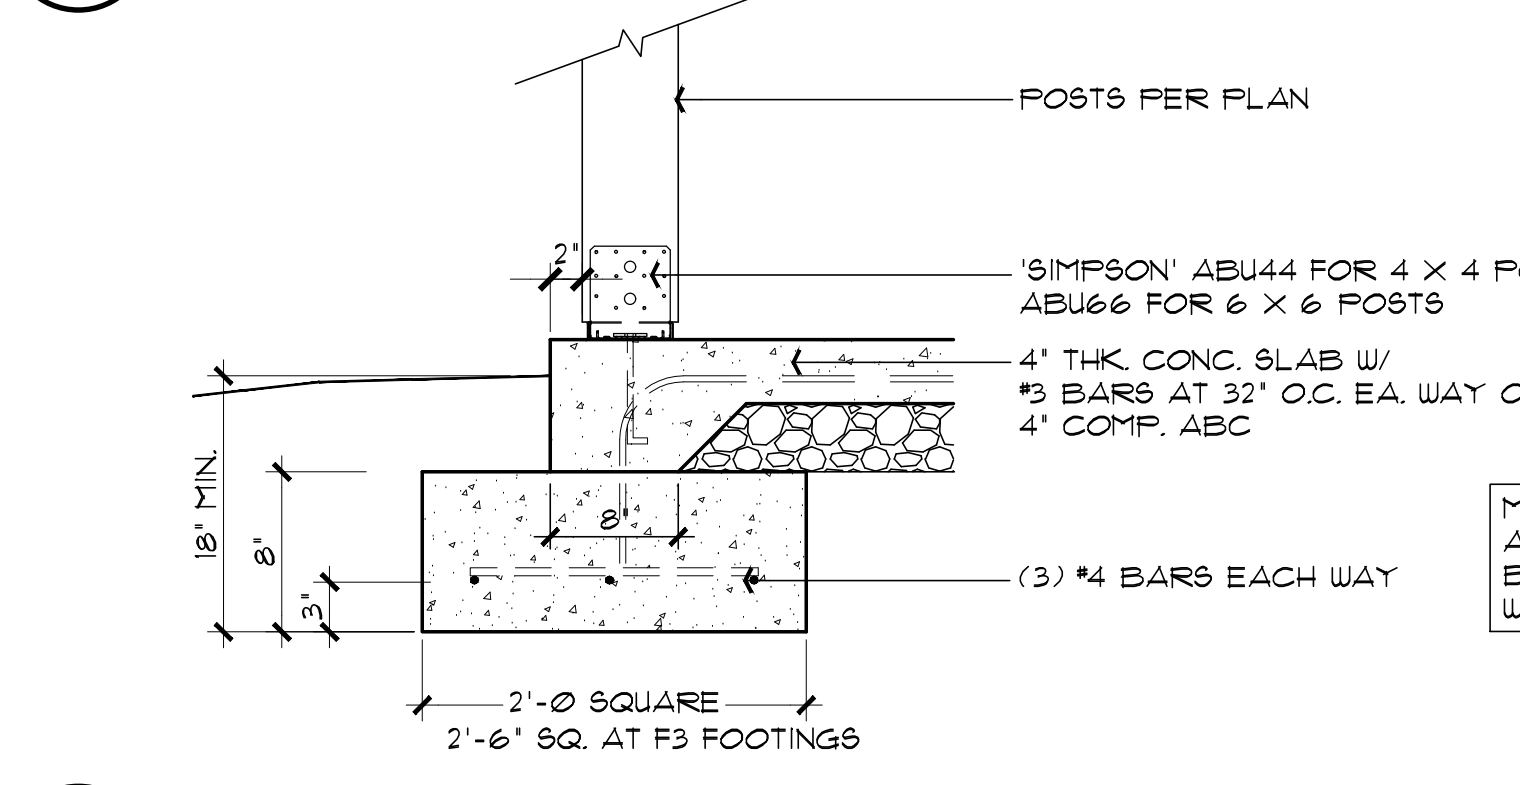


F1/F3 POST BASE FOOTING
SCALE: 1" = 1'-0"

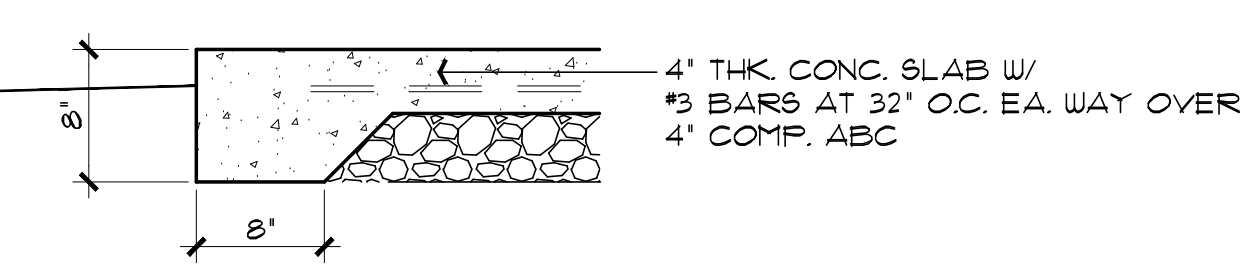


F2 TYPICAL TURN-DOWN FOOTING
SCALE: 1" = 1'-0"


NOTE: SLAB INSULATION MAY BE
ELIMINATED IF USING WINDOWS WITH
0.32 U-FACTOR OR BETTER.

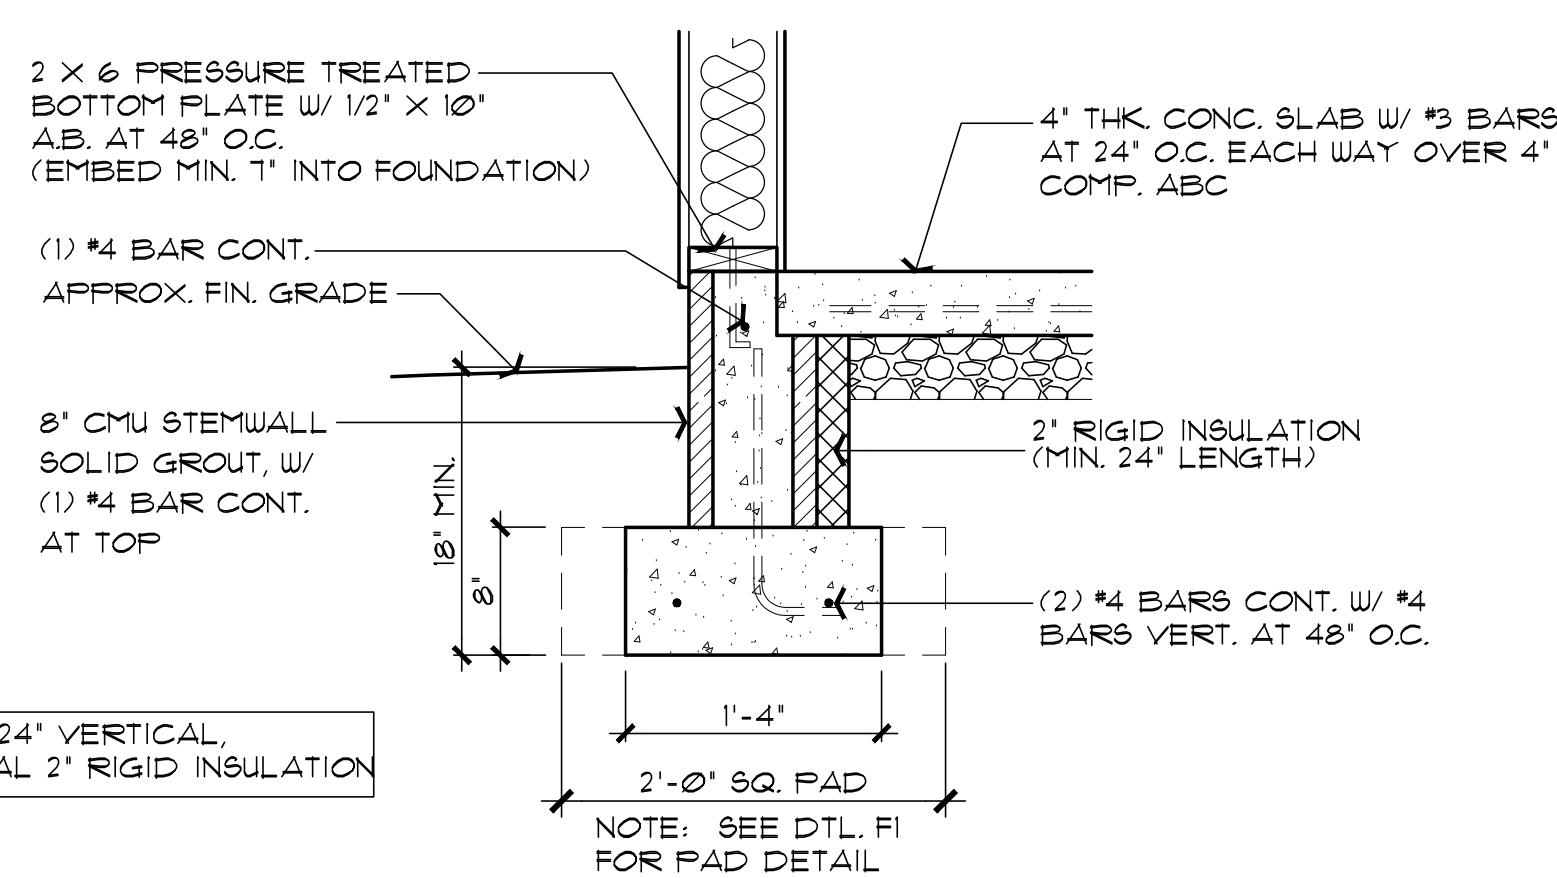


WF2 CMU STEM WALL OPTION
SCALE: 1" = 1'-0"

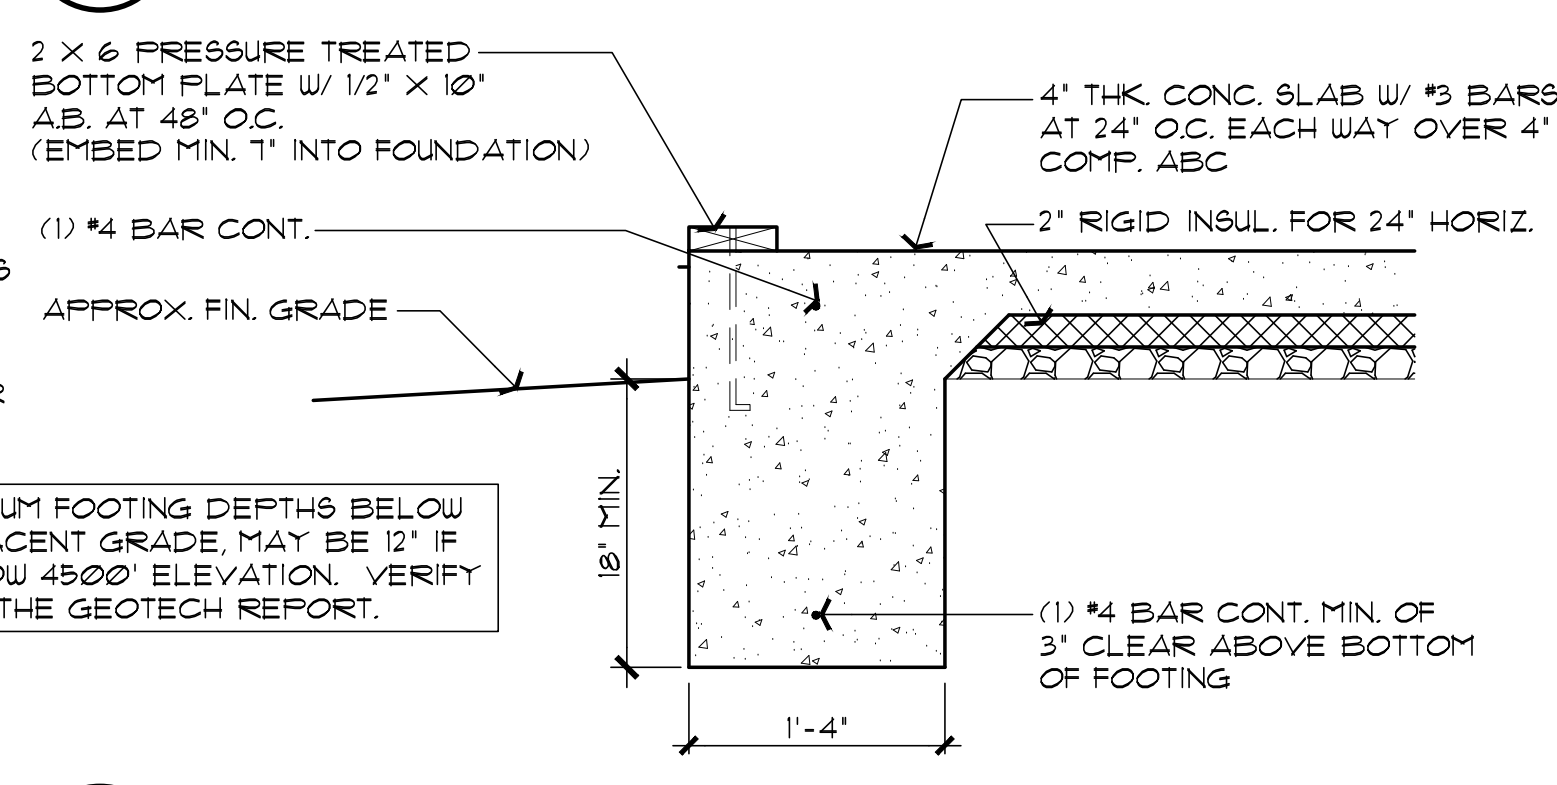

WF3 MONOLITHIC FOOTING OPTION
SCALE: 1" = 1'-0"

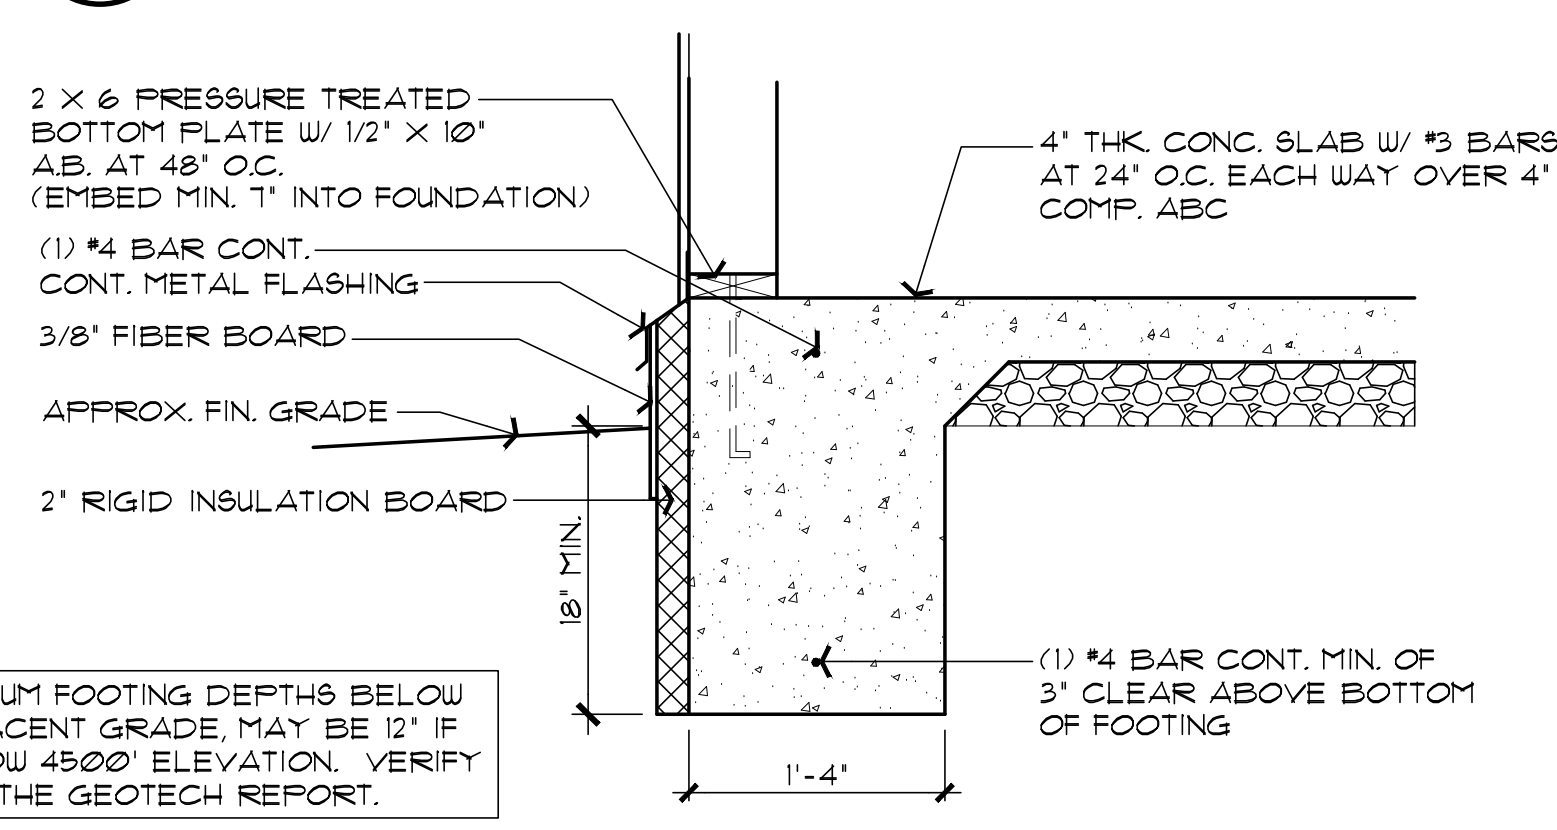

**WF4 MONOLITHIC FOOTING OPTION WITH
EXTERIOR SLAB INSULATION**
SCALE: 1" = 1'-0"

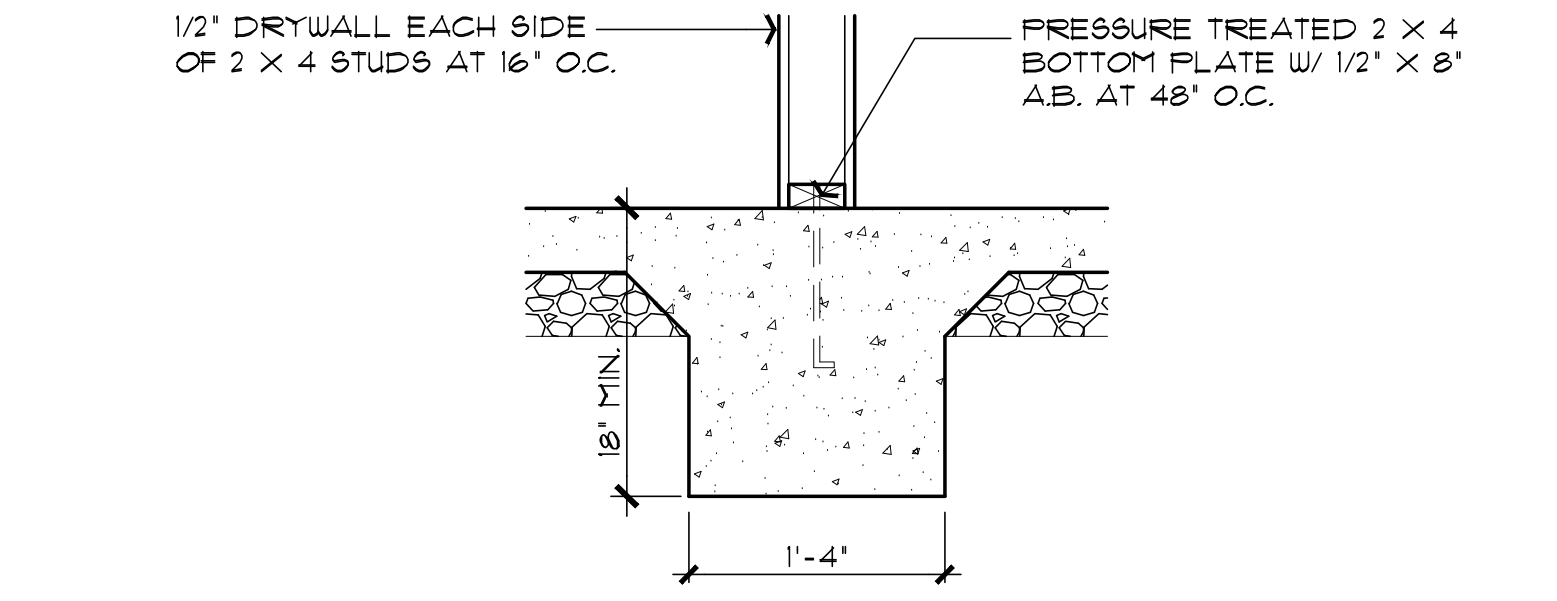


**WF5 INTERIOR FOOTING AT BRACE WALL
GB METHOD (IRC TABLE R602.10.4)**
SCALE: 1" = 1'-0"

Job no. : 3BD/2BA RIGHT
Date : 05/24/2024
Drawn by: MFR
Chk'd by: MFR
Scale : AS NOTED
Revisions:

This design is the property of Mark Rogers, Architect, PLLC and the drawings are the property of Yavapai County Government, and are not to be reproduced, or copied in whole or in part. It is only to be used for the project and site specifically identified herein and is not to be used on any other project. It is to be returned upon request.

Scales as stated herein are valid on the original drawing only. Contractor shall carefully review all dimensions and conditions shown herein and at once report to the Architect any error, inconsistency or omission he may discover.

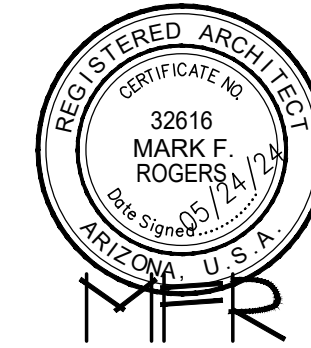

Mark Rogers, Architect, PLLC

86323
Chino Valley, Arizona
Phone: (928) 848-3516
markrogers914@gmail.com

761 Highland Circle
Chino Valley, Arizona 86323

FOUNDATION / ROOF DETAILS
PHASE TWO - 3 BDRM / 2 BATH - RIGHT PARKING

YAVAPAI COUNTY, ARIZONA

1015 FAIR STREET
PRESCOTT, ARIZONA


SHEET NO:

A-7.0

PROPERTY OF YAVAPAI COUNTY, AZ

ENERGY | NOTES:

- REVIEW AND APPROVAL OF ALL SKYLIGHTS, CEILING LIGHTS, PENETRATIONS, U-FACTOR WINDOW AND DOORS TO BE .40 OR GREATER SHALL REMAIN ON WINDOWS, SKYLIGHTS & DOORS UNTIL INSPECTED AND APPROVED FOR THE ABOVE REQUIREMENT. THE FOUNDATION SLAB INSULATION MAY BE ELIMINATED IF USING A MAX. 0.32 U-FACTOR ON GLAZING.**
- 2. CEILING**
- CEILING INSULATION TO BE MIN. R-30 (ZONE 2); R-38 (ZONE 4) MARKERS SHALL BE AFFIXED TO THE TRUSSES OR JOIST AND MARKED WITH THE MIN. INSTALLED THICKNESS BY ONE INCH HIGH NUMBERS. A MIN. OF ONE MARKER SHALL BE INSTALLED EVERY 300 SQ. FT. OF AREA WITH NUMBERS TO FACE THE TIGHT ACCESS OPENING. MARKERS SHALL BE INSTALLED AT ROUGH IN OR WALL INSULATION INSPECTIONS.
- 3. WOOD FRAMED EXTERIOR WALLS (MIN. R-19 FOR 2 X 6 WALLS)**
- WALL INSULATION SHALL BE IN SUBSTANTIAL CONTACT WITH THE SURFACE BEING INSULATED TO AVOID AIR PATHS THAT BYPASS THE INSULATION.
 - INSULATION SHALL NOT BE COMPRESSED BY INSET STAPLING OF THE BATT INSULATION OR OTHER MEANS
 - INSULATION SHALL FILL ALL CAVITIES COMPLETELY BY CUTTING INSULATION AROUND ELECTRICAL OUTLETS AND SWITCHES AND BY SLICING INSULATION TO FIT BEHIND AND IN FRONT OF ELECTRICAL WIRING IN THE CAVITY AND PLUMBING PIPING
 - BAND JOISTS AND OTHER INTERSTITIAL FLOOR ELEMENTS OF THE WALL SHALL BE INSULATED
- 4. NOT USED.**

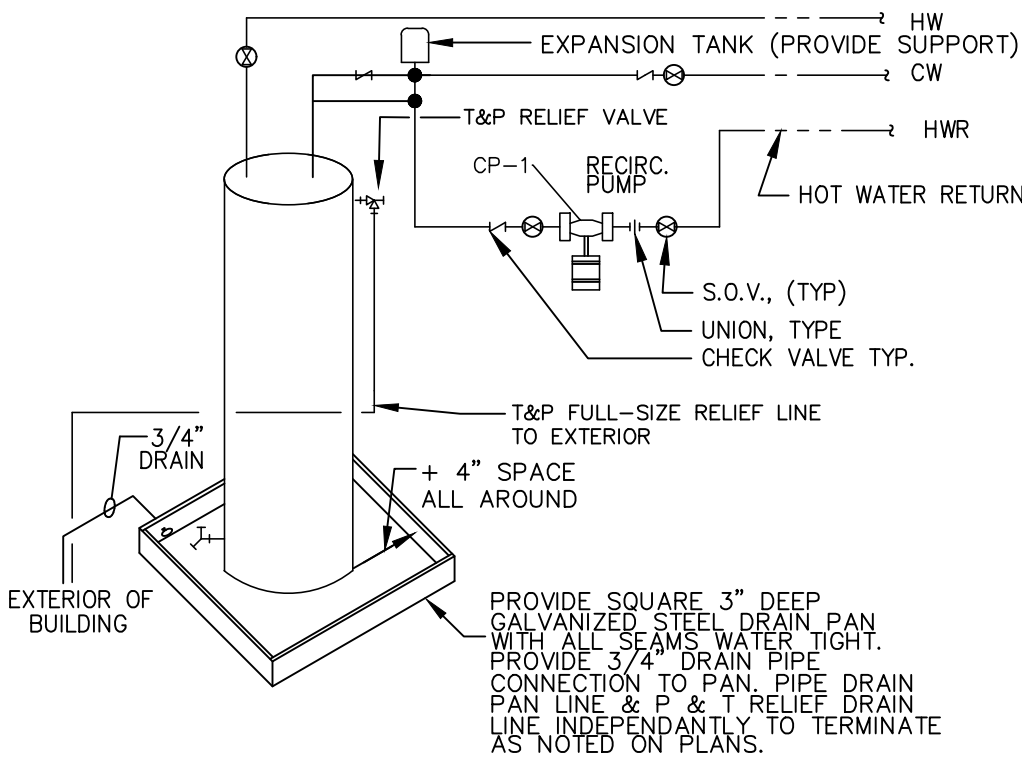


PROVIDE ACCESSABLE ELECTRICAL DISCONNECT

ELECTRIC WATER HEATER


NO SCALE

NOTE: DRAIN PAN, AND T&P
MUST DRAIN BY GRAVITY. WATER
HEATER SHALL BE HIGH ENOUGH
OFF THE FLOOR TO PROVIDE FOR
DISCHARGE PIPING TO EXTERIOR.

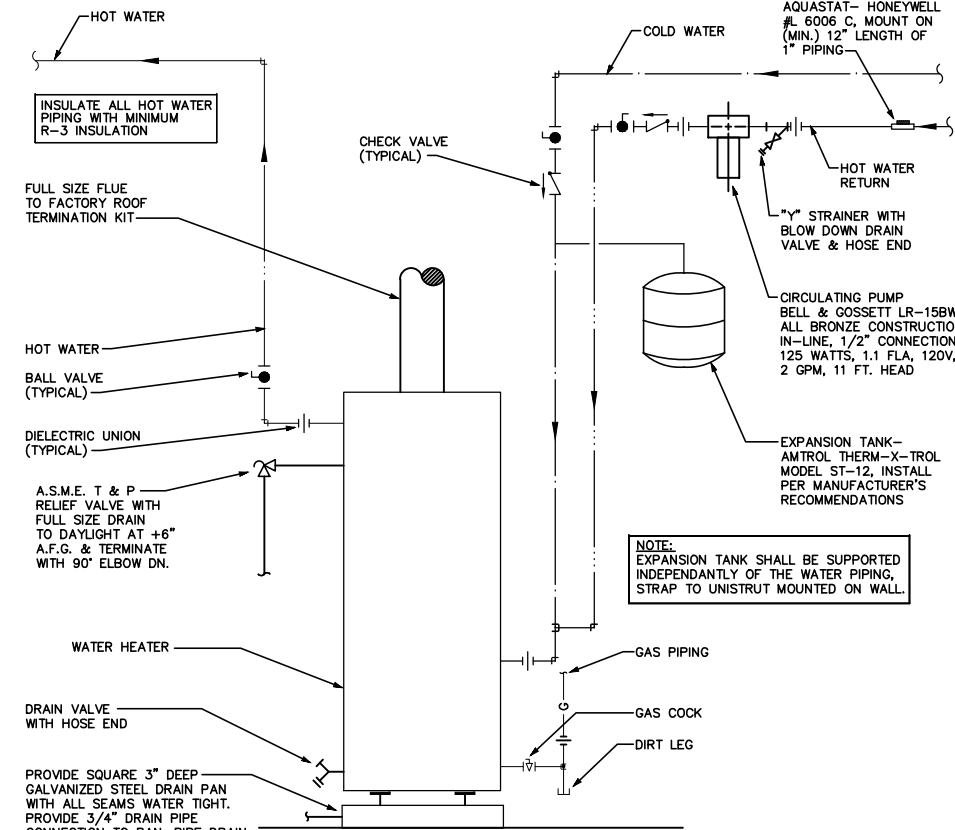

GAS WATER HEATER OPTION

NO SCALE

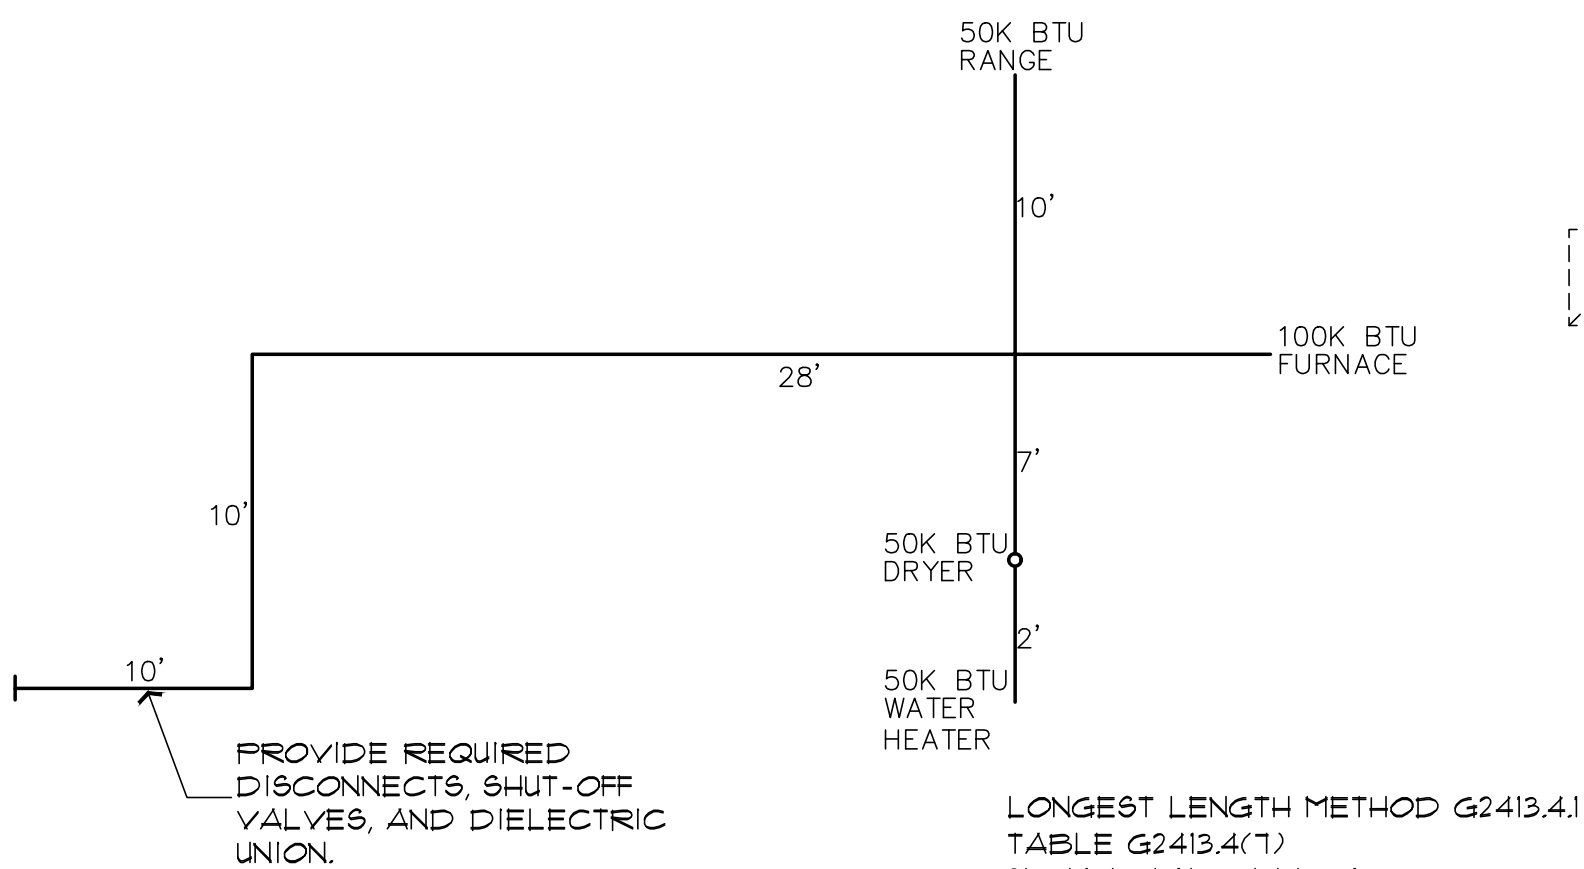


GAS PIPING ISOMETRIC

NO SCALE



NOTE: USE 1" DIA. PIPING FOR ALL FLOOR PLAN LAYOUTS, INCLUDING ALTERNATE FIXTURE LOCATIONS. THE PLUMBING CONTRACTOR SHALL SHALL VERIFY ALL SIZING, AND FIT PRIOR TO INSTALLATION.

NOTE: EXACT LENGTH FROM EXTERIOR OF
STRUCTURE, TO GAS SOURCE, WILL VARY FOR
EACH PROJECT.

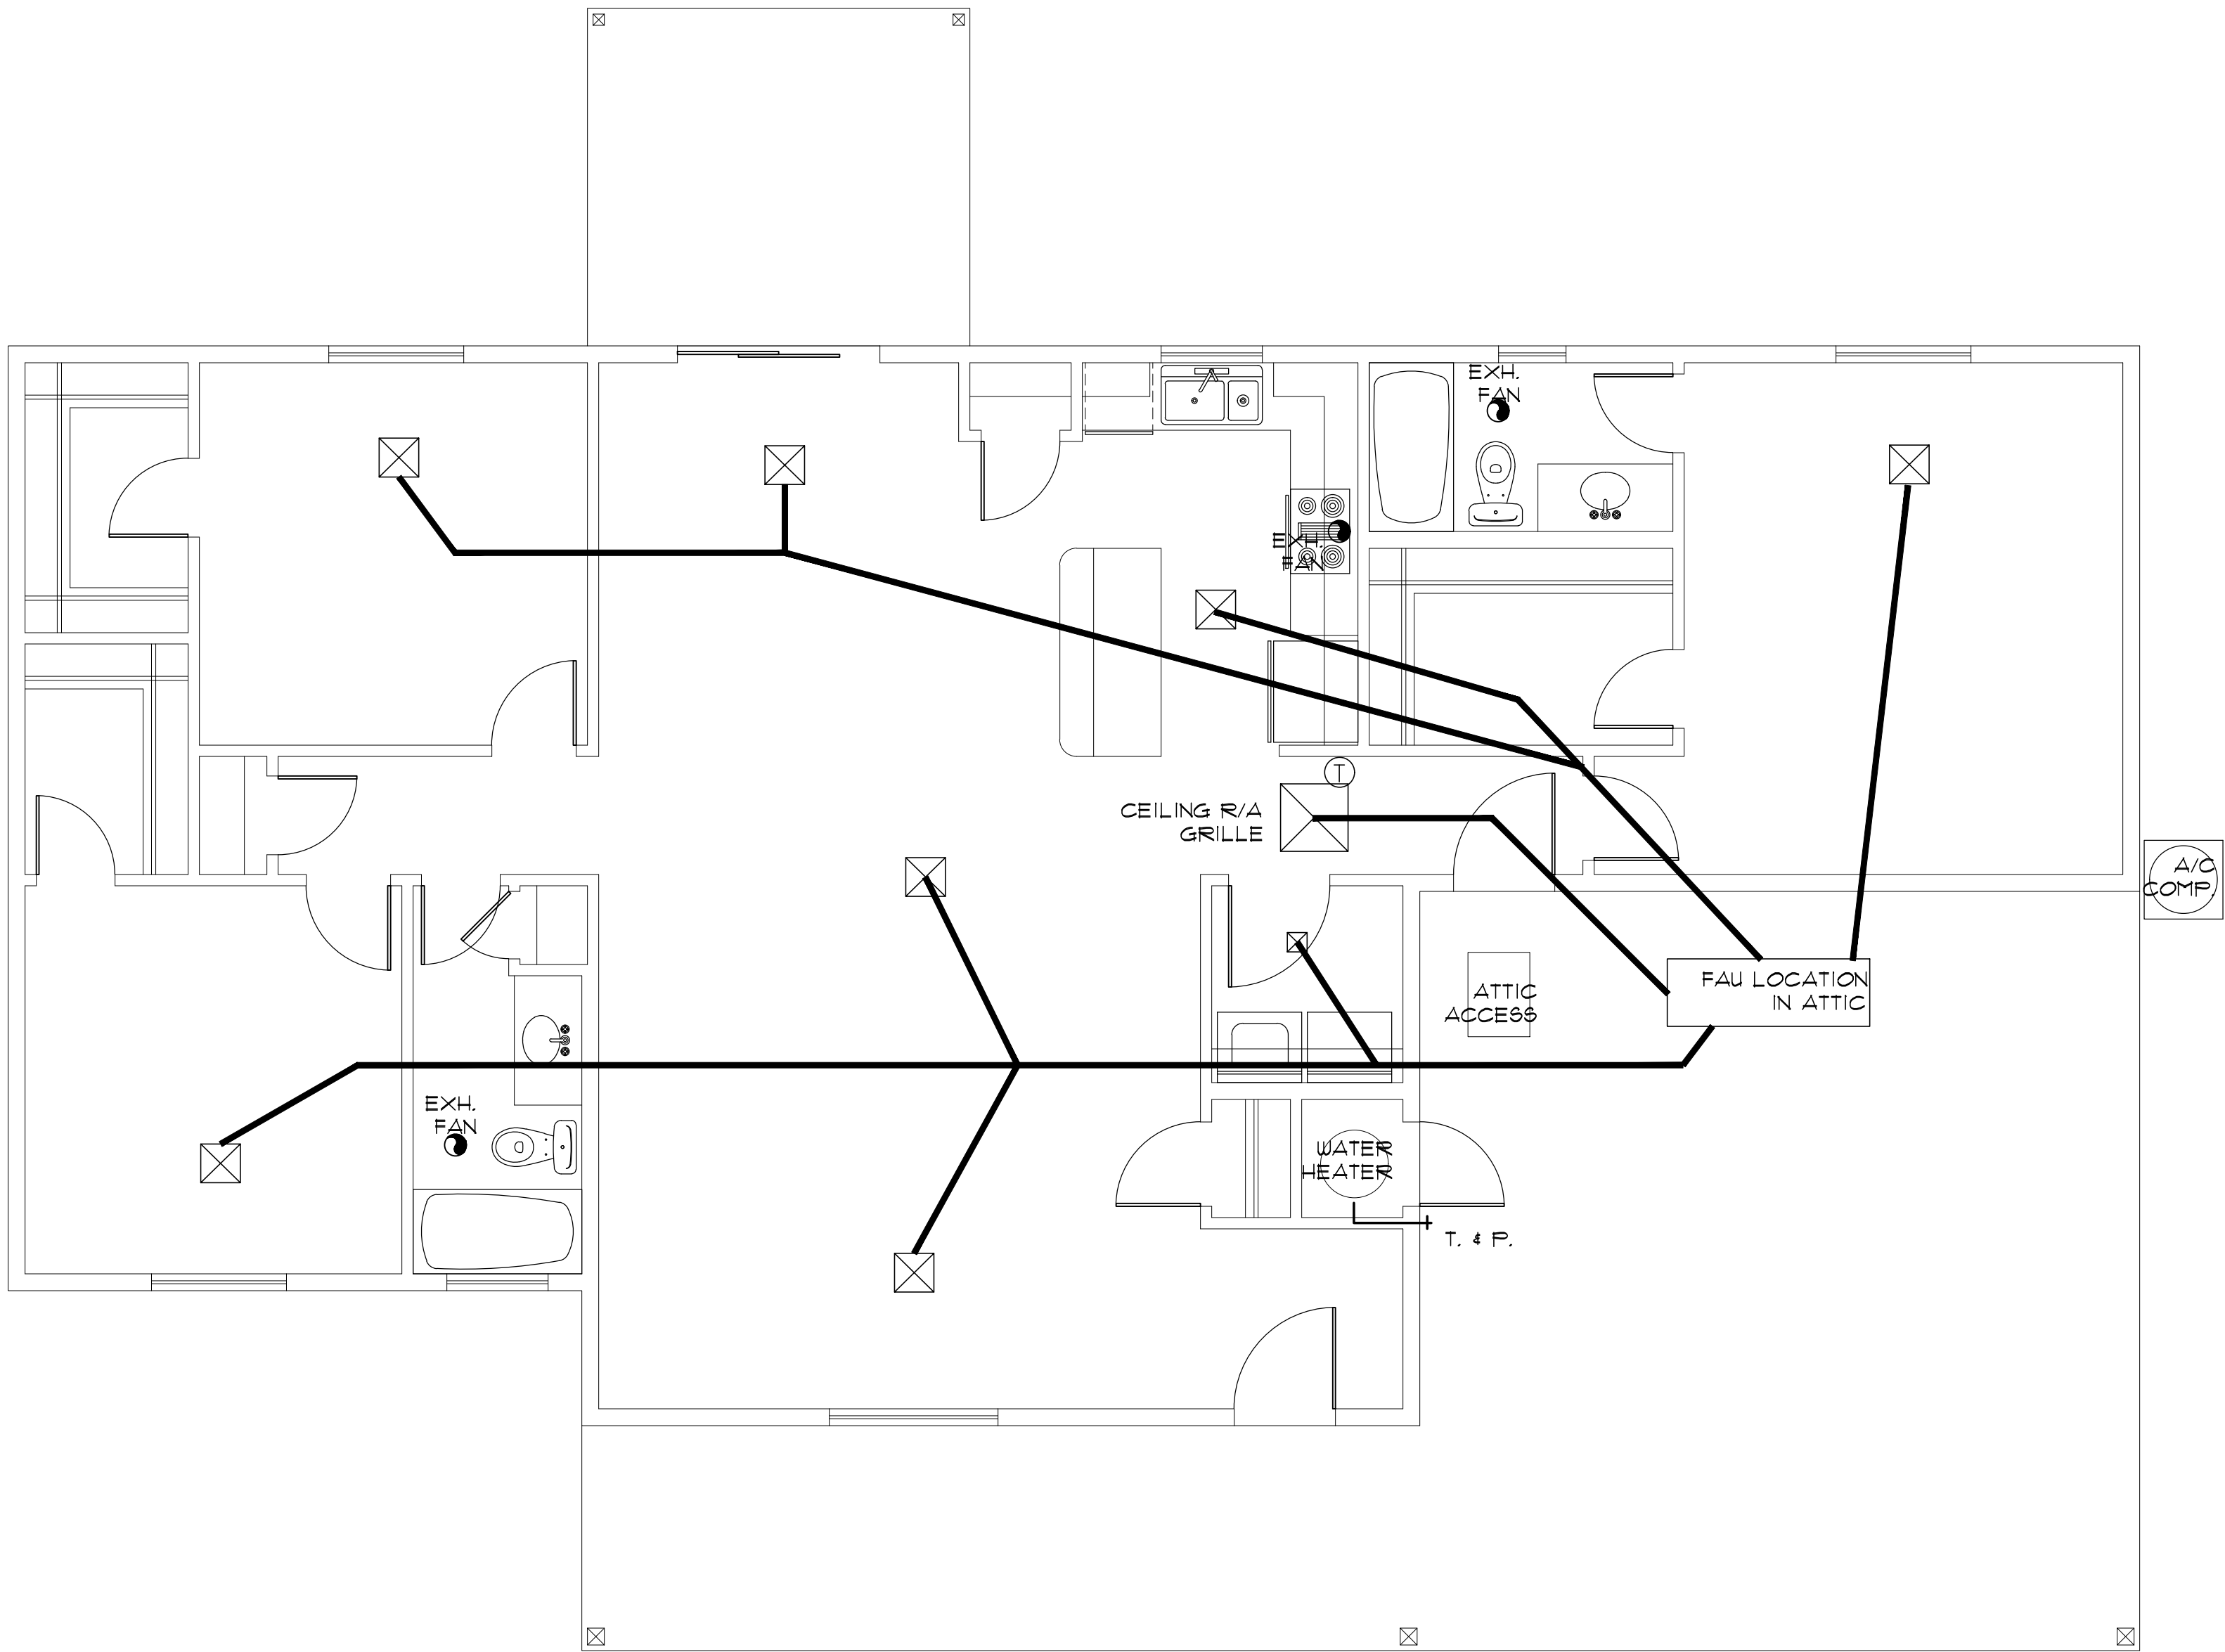

HVAC PLAN (with Carport option)

SCALE: 1/4" = 1'-0"

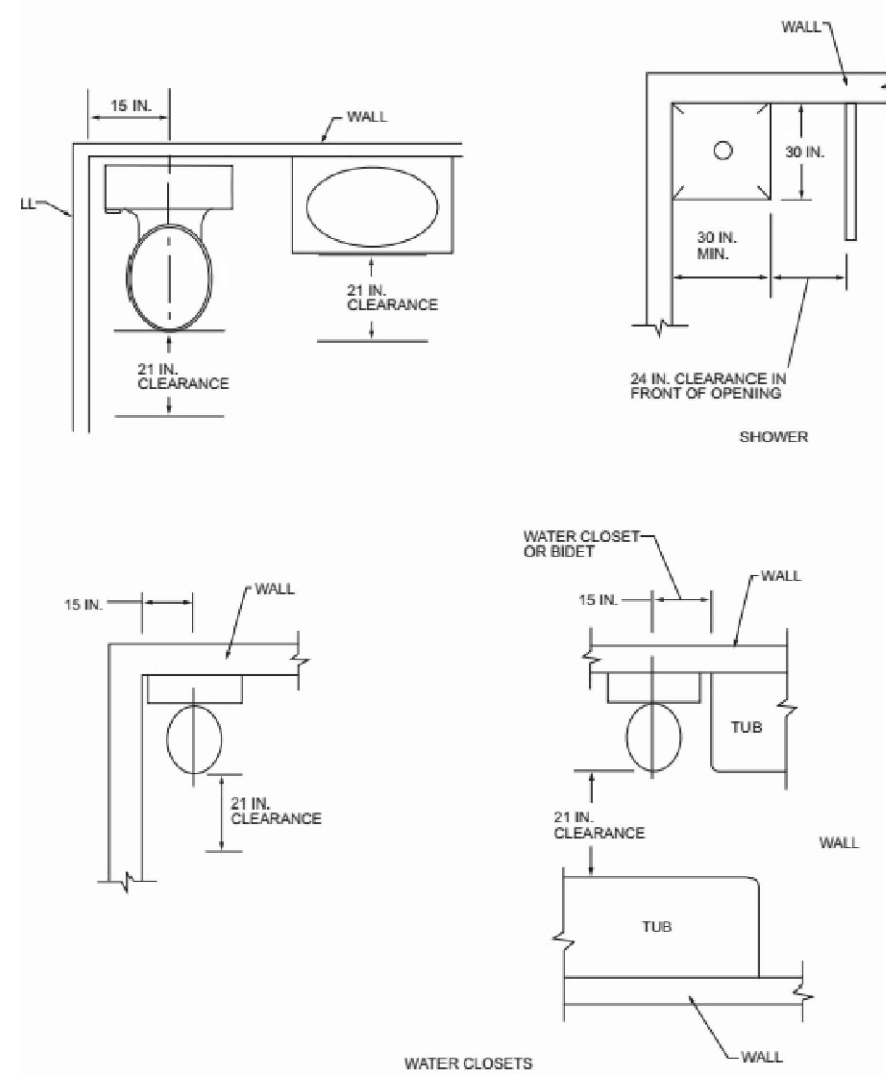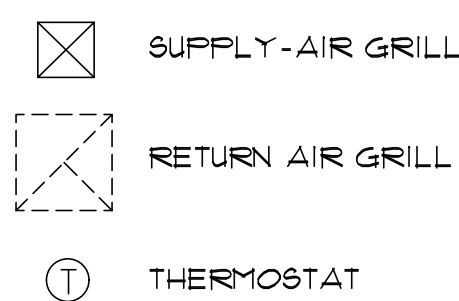

PLUMBING FIXTURE CLEARANCES

NO SCALE

PER IRC FIGURE R307.1

HVAC/PLUMBING GENERAL NOTES:

1. THE MECHANICAL CONTRACTOR SHALL DETERMINE THE FINAL EQUIPMENT SIZING, DUCT SIZING, AND DUCT LAYOUT PRIOR TO INSTALLATION.
2. DRAIN AND VENT SIZES TO BE DETERMINED BY PLUMBING CONTRACTOR.
3. WATER HEATER RELIEF VALVE SHALL EXTEND OUTSIDE OF THE BUILDING WITH THE END OF THE PIPE NOT MORE THAN 2' NOR LESS THAN 6' ABOVE THE GROUND AND POINTING DOWNWARD.
4. PROVIDE A PAN, AND DRAIN FOR THE WATER HEATER.
5. THE CLOTHES DRYER EXHAUST DUCT SHALL BE AT LEAST THE DIAMETER OF THE APPLIANCE OUTLET AS RECOMMENDED BY THE MANUFACTURER AND SHALL TERMINATE AT THE EXTERIOR OF THE BUILDING. IT SHALL NOT EXCEED 25' IN LENGTH WITH REDUCTIONS FOR BENDS. THE DUCT SHALL TERMINATE NOT LESS THAN 3' FROM A PROPERTY LINE.
6. THE SITE PLAN SHALL INDICATE THE LOCATION OF THE GAS SOURCE, THE DISTANCE AND PIPE SIZE FROM THE SOURCE, TO THE RESIDENCE, AND THE TYPE OF FUEL (NATURAL GAS OR PROPANE).
7. BI-FOLD DOOR AT WATER HEATER CLOSET SHALL BE LOUVERED FOR COMBUSTION AIR (MIN. REQUIREMENTS OF 100 SQ. INCHES OF FREE AIR).

This design is the property of Mark Rogers, Architect, PLLC, and the drawings are the property of Yavapai County Government, and are not to be reproduced, copied in whole or in part. It is only to be used for the project and site specifically identified herein and is not to be used on any other project. It is to be returned upon request.

Scales as stated hereon are valid on the original drawing only. Contractor shall carefully review all dimensions and conditions shown hereon and at once report to the Architect any error, inconsistency or omission he may discover.



Mark Rogers, Architect, PLLC

761 Highland Circle ♦ ♦ ♦ Chino Valley, Arizona 86323
Phone: (928) 848-3516
markrogers914@gmail.com


HVAC PLAN (FAU above Garage/Carport)
ENERGY NOTES / DETAILS
PHASE TWO - 3 BDRM / 2 BATH - RIGHT PARKING

YAVAPAI COUNTY, ARIZONA

1015 FAIR STREET
PRESCOTT, ARIZONA


REVIEWED FOR DESIGN
CRITERIA ONLY

SEE ATTACHED COVER SHEET FOR ALL
STAMPS. IT IS THE RESPONSIBILITY OF THE
OWNER/APPLICANT TO REVIEW AND
ACKNOWLEDGE APPLICABLE STAMPS.

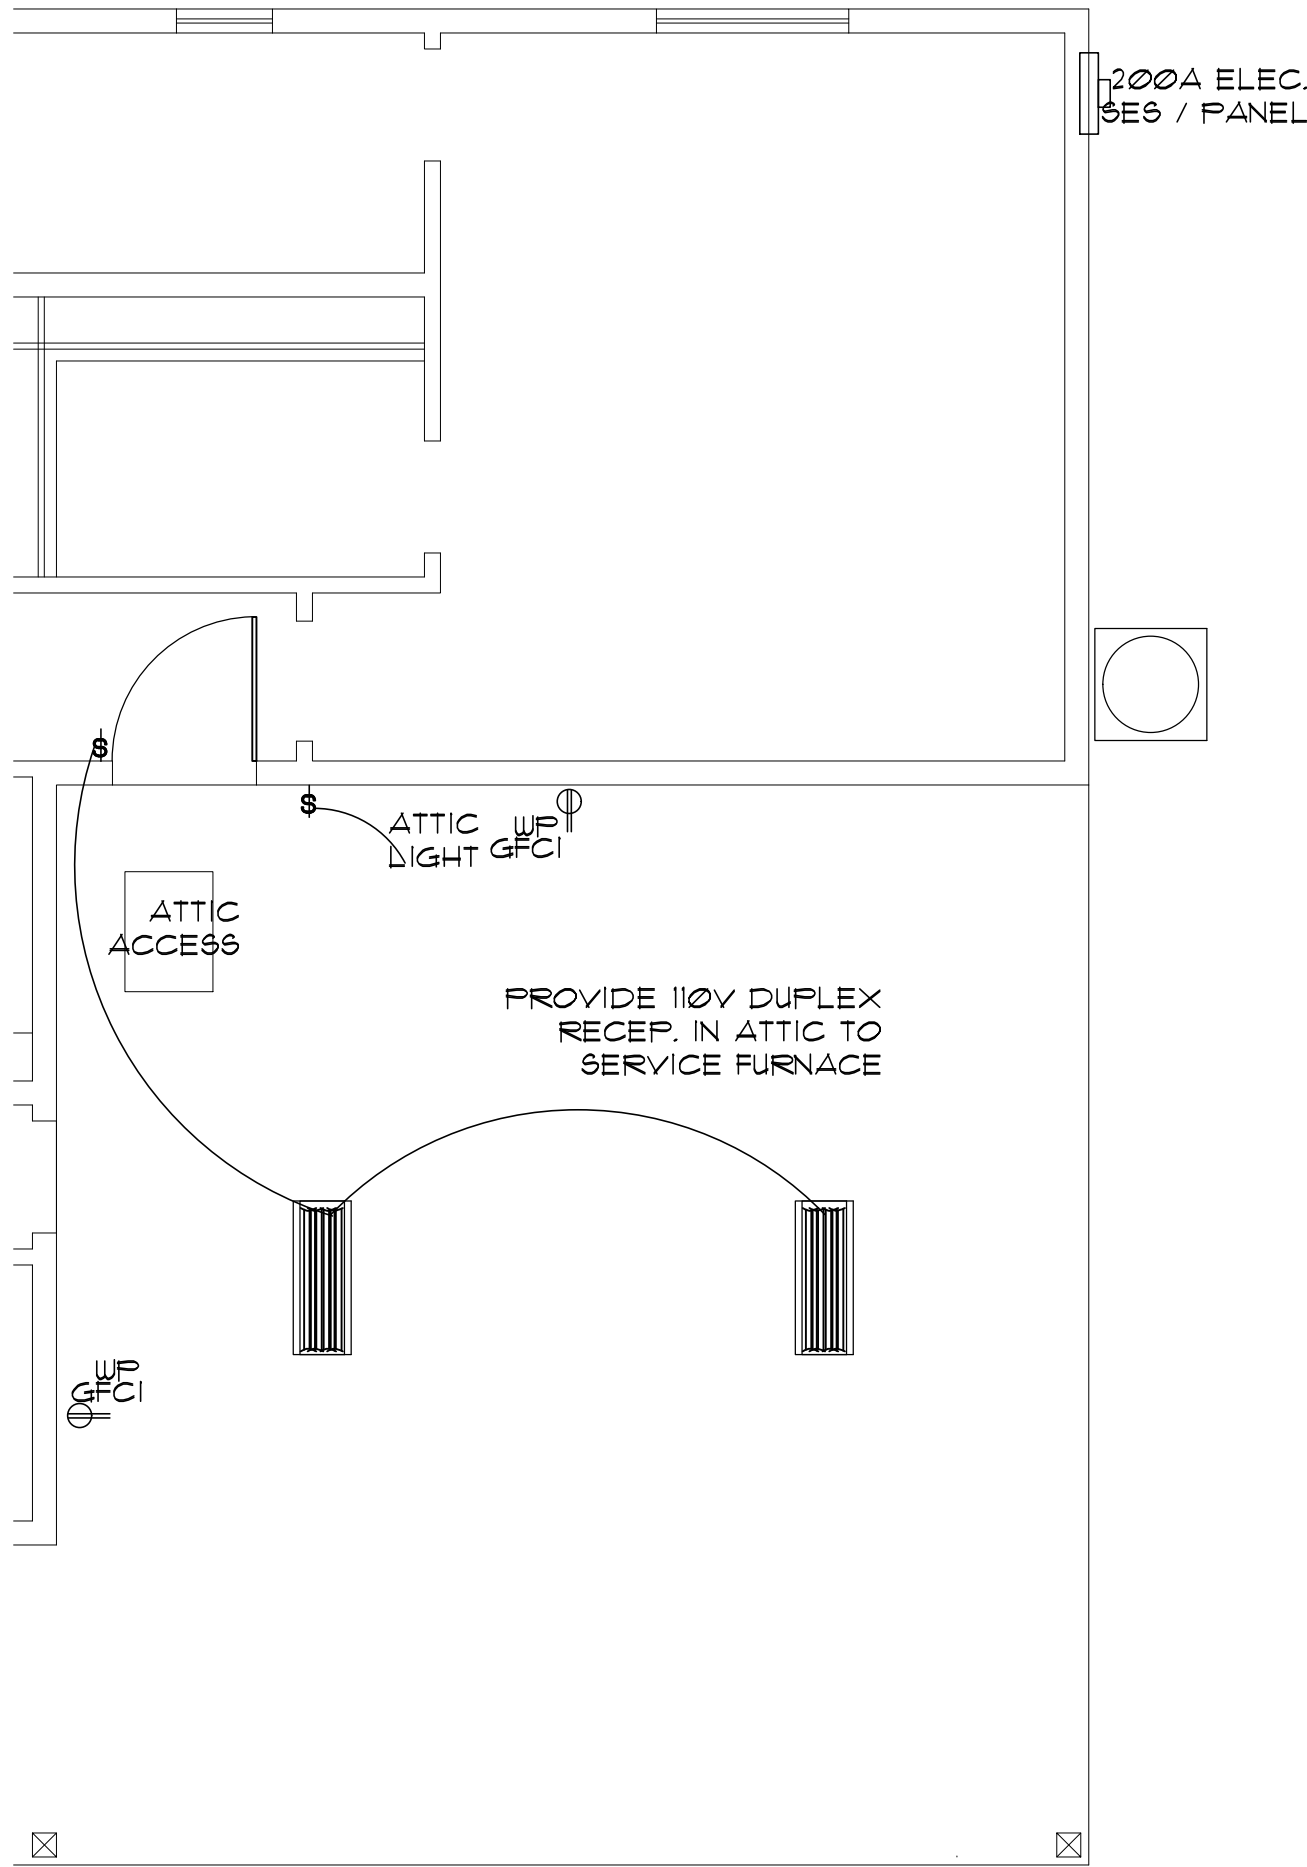

PARTIAL ELECTRICAL PLAN (with Carport option)

SCALE: 1/4" = 1'-0"

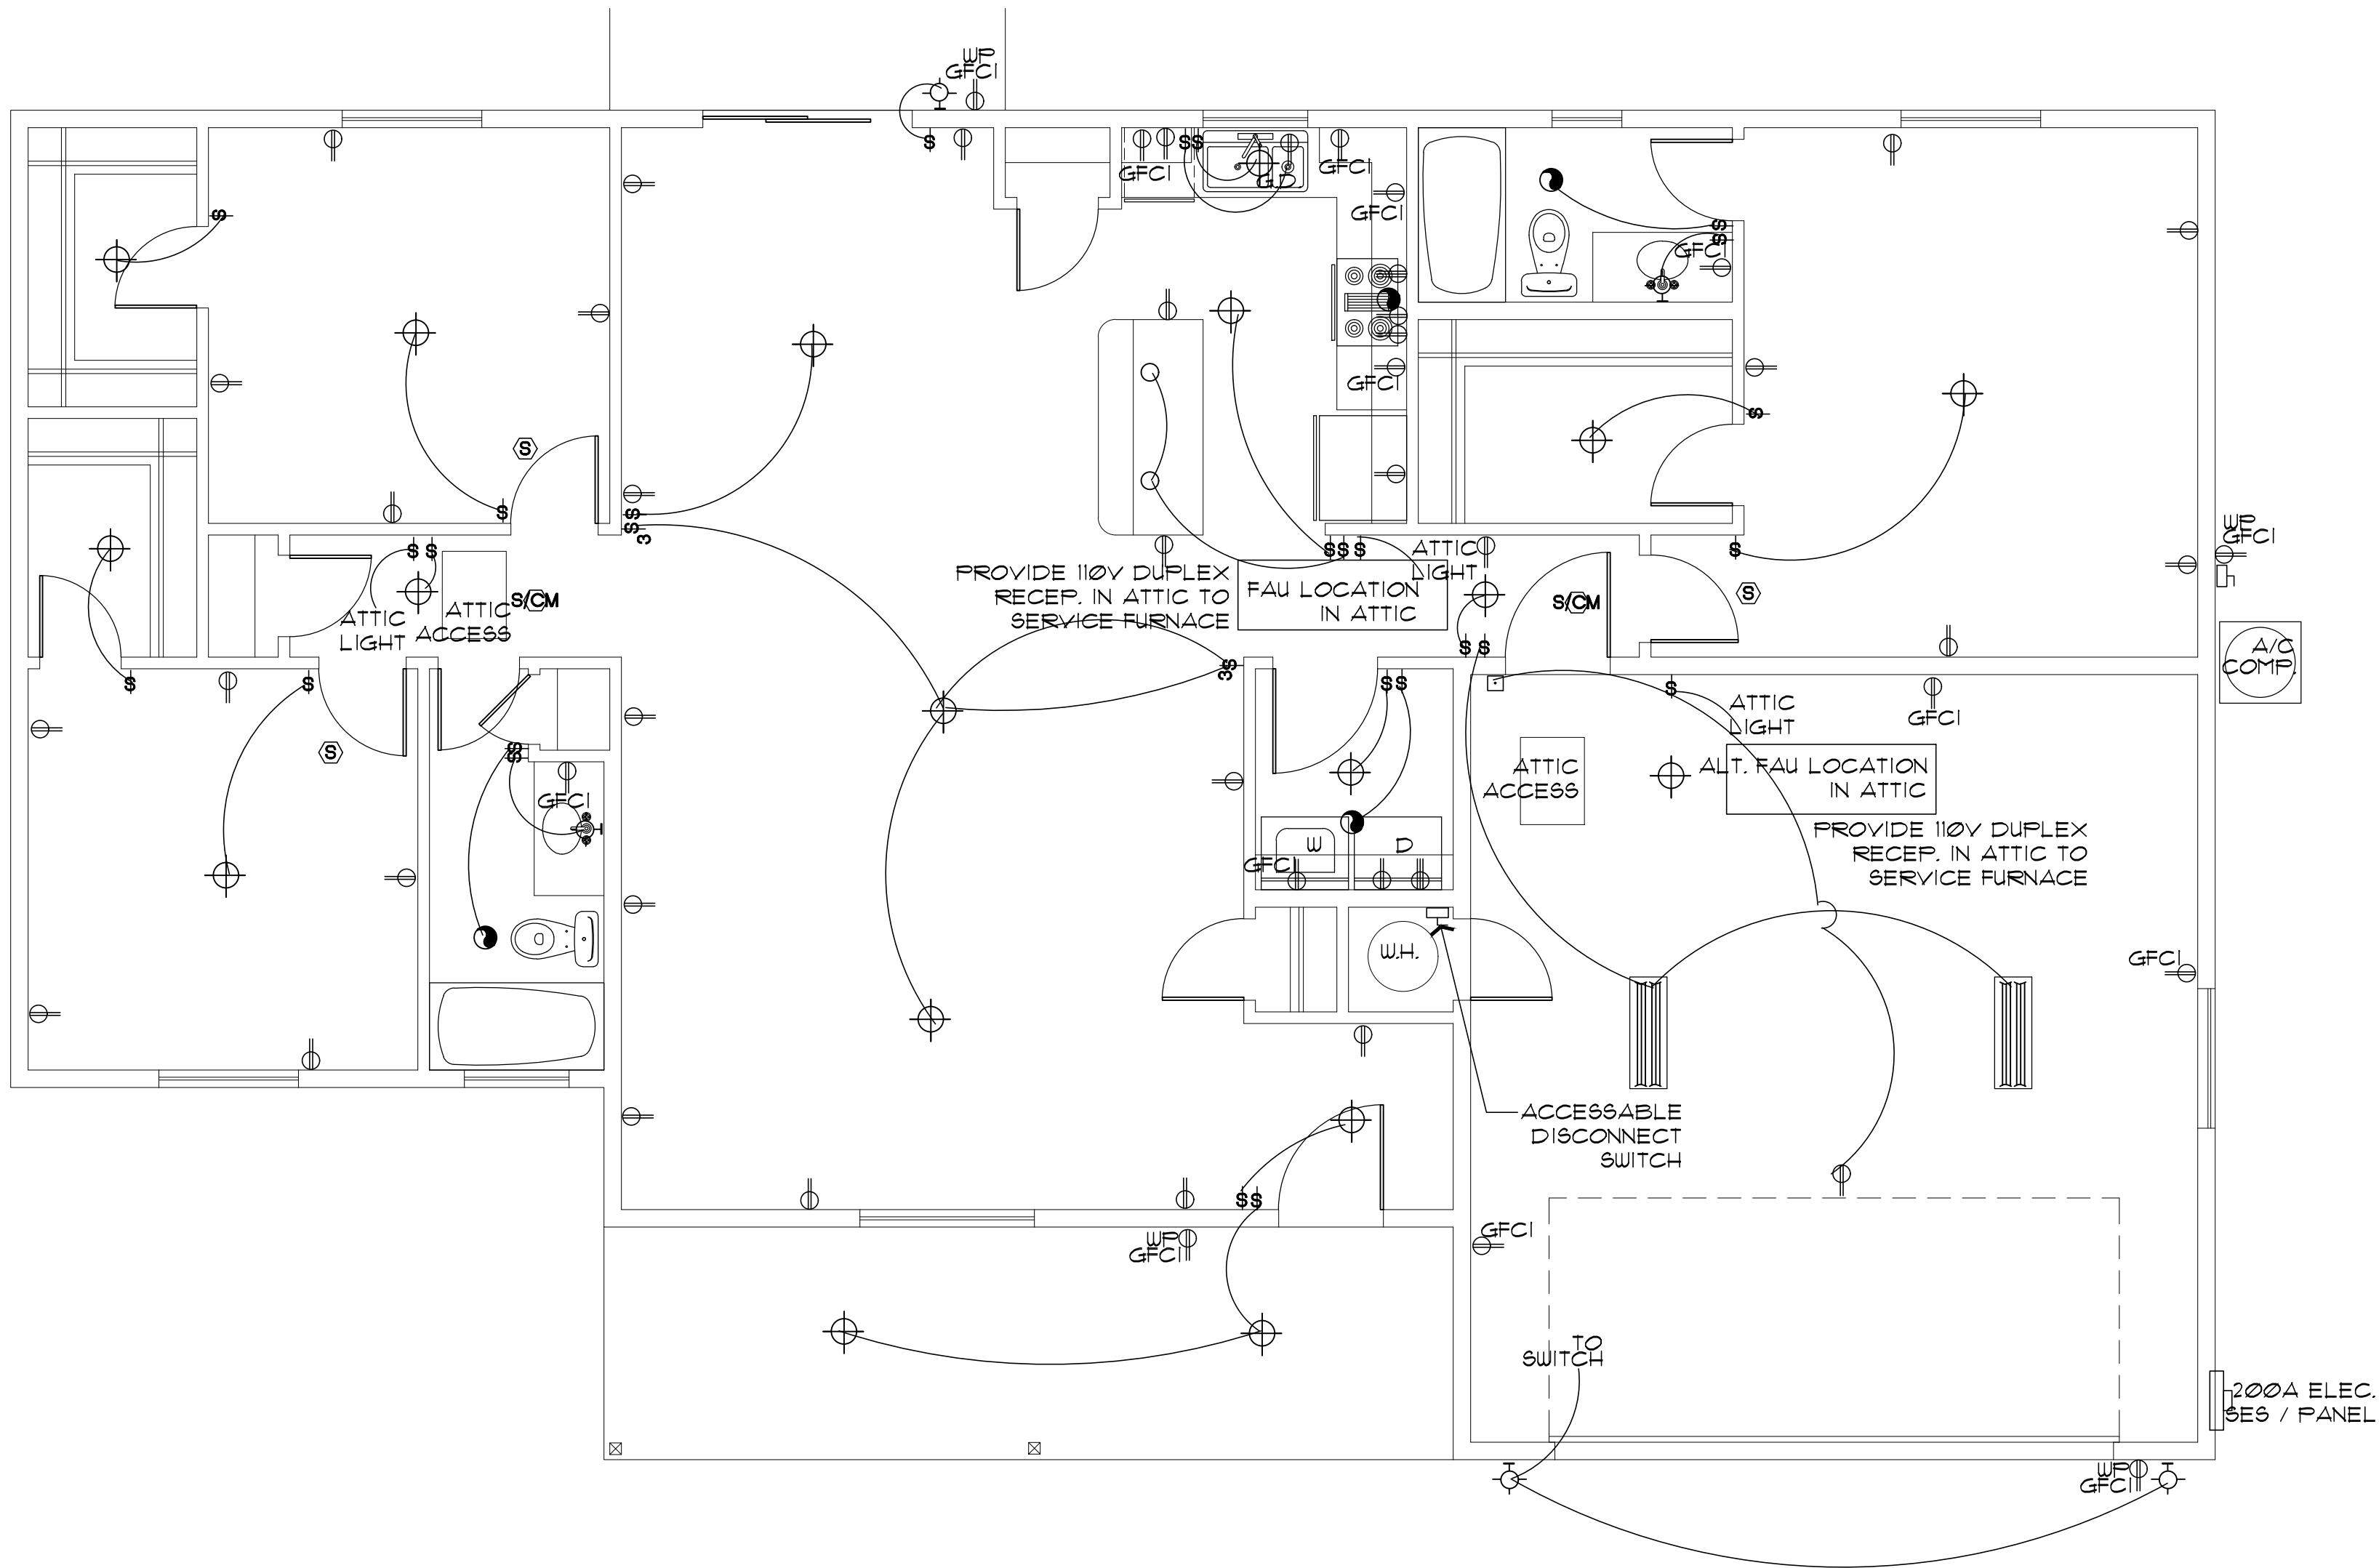

ELECTRICAL PLAN (with Garage option)

SCALE: 1/4" = 1'-0"

ELECTRICAL SYMBOLS


- WALL MOUNTED LIGHT FIXTURE
- CEILING MOUNTED LIGHT FIXTURE
- DAMP-PROOF CEILING MOUNTED LIGHT FIXTURE
- PENDANT LIGHT FIXTURE
- RECESSED CAN FIXTURE
- 1' X 4' SURFACE MTD. FLUORESCENT FIXTURE
- 110V. DUPLEX CONVENIENCE OUTLET MOUNTED 12" AFF. OR AS NOTED
- 110V. 4-FLEX CONVENIENCE OUTLET MOUNTED 12" AFF. OR AS NOTED
- GROUND-FAULT INTERRUPT
- WEATHER-PROOF GROUND-FAULT INTERRUPT
- 220V. RECEPTACLE
- SINGLE POLE SWITCH MOUNTED AT 48" OR AS NOTED
- 3-WAY SINGLE POLE SWITCH MOUNTED AT 48" OR AS NOTED
- CEILING EXHAUST FAN
- SMOKE DETECTOR
- SMOKE DETECTOR / CARBON MONOXIDE COMBO
- CABLE TV OUTLET
- CEILING FAN W/ LIGHT KIT
- DOORBELL BUTTON
- TELEPHONE OUTLET
- INTERNET OUTLET

ELECTRICAL GENERAL NOTES

- ALL WORKMANSHIP, MATERIALS, AND METHODS SHALL CONFORM TO N.E.C.- 2017 EDITION.
- ALL HABITABLE ROOMS SHALL BE PROVIDED W/ ELECTRICAL OUTLETS SO THAT NO PART OF THE WALL IS MORE THAN 6' FROM AN OUTLET. WALL SECTIONS 2' OR LARGER & KITCHEN COUNTERS WIDER THAN 12' SHALL BE SERVICED BY A RECEPTACLE.
- ALL RECEPTALS IN BATHROOMS, OUTSIDE & WITHIN 6' OF WATER SOURCE SHALL BE G.F.C.I.
- ALL SMOKE DETECTORS SHALL BE INTERCONNECTED ON SEPARATE CIRCUIT & SHALL RECEIVE PRIMARY POWER FROM BUILDING WIRING & SHALL HAVE BATTERY BACKUP. CONNECT NEW SMOKE DETECTORS TO NEW AUDIBLE SYSTEM INSIDE EXISTING RESIDENCE.
- LIGHTS IN CLOSETS SHALL BE 18" FROM SHELVING (MEASURED HORZTL. OR BE RECESSED).
- PROVIDE MINIMUM TWO 20A BRANCH CIRCUITS FOR RECEPTACLES LOCATED IN THE KITCHEN, PANTRY, EATING AREA, A SEPARATE 20A BRANCH CIRCUIT TO THE LAUNDRY EQUIP., AND A SEPARATE 20A BRANCH CIRCUIT FOR BATHROOM RECEPTACLES.
- ALL BRANCH CIRCUITS THAT SUPPLY 120-VOLT SINGLE PHASE 15 & 20 AMP OUTLETS INSTALLED IN FAMILY ROOMS, DINING ROOMS, LIVING ROOMS, PARLORS, LIBRARIES, DEN, BEDROOMS, SUNROOMS, RECREATION ROOMS, CLOSETS, HALLWAYS AND SIMILAR ROOMS OR AREAS SHALL BE PROTECTED BY COMBINATION TYPE ARC FAULT CIRCUIT INTERRUPTERS INSTALLED TO PROVIDE PROTECTION OF THE
- FIXTURES, FITTINGS, BOXES AND RECEPTACLES LOCATED IN DAMP OR WET LOCATIONS SHALL BE 'LISTED' TO BE SUITABLE FOR SUCH CONDITIONS.
- CONTRACTOR TO EMBED 20' OF #4 AWG COPPER WIRE IN FOOTING FOR ELECTRICAL SERVICE GROUND. PROVIDE BONDING TO THE INTERIOR WATER PIPING AND ABOVE GROUND PORTION OF GAS PIPING SYSTEM.
- IN KITCHEN AND DINING ROOMS A RECEPTACLE OUTLET SHALL BE INSTALLED AT EACH WALL COUNTER SPACE 12" OR WIDER SO THAT AT NO POINT ALONG THE WALL IS MORE THAN 24" FROM A RECEPTACLE OUTLET AND SHALL BE GFCI PROTECTED.
- PROVIDE AT LEAST ONE WEATHER PROOF RECEPTACLE OUTLET NOT MORE THAN 6'-6" ABOVE GRADE AND GFCI PROTECTED. AT THE FRONT AND BACK OF EACH DWELLING, ALL RECEPTACLES INSTALLED OUTDOORS MUST BE GFCI PROTECTED.
- ALL EXTERIOR LIGHTING SHALL CONFORM TO YAVAPAI COUNTY DARK SKY ORDINANCE.
- IN ATTICS, A SERVICE OUTLET & LIGHTING FIXTURE LOCATED NEAR THE APPLIANCE REQUIRING SERVICE SHALL BE CONTROLLED BY A SWITCH AT THE ENTRY OF THE ATTIC. (REQUIRED FOR ATTIC MOUNT FURNACES)

Job no. : 3BD/2BA RIGHT
Date : 05/24/2024
Drawn by: MFR
Chk'd by: MFR
Scale : AS NOTED
Revisions:

This design is the property of Mark Rogers, Architect, PLLC, and the drawings are the property of Yavapai County Government, and are not to be reproduced, or copied in whole or in part. It is only to be used for the project and site specifically identified herein and is not to be used on any other project. It is to be returned upon request.
Scales as stated hereon are valid on the original drawing only. Contractor shall carefully review all dimensions and conditions shown hereon and at once report to the Architect any error, inconsistency or omission he may discover.

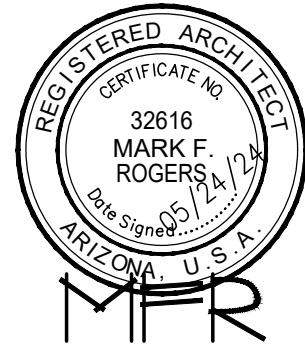

Mark Rogers, Architect, PLLC

761 Highland Circle
Chino Valley, Arizona 86323
Phone: (928) 848-3516
markrogers914@gmail.com

ELECTRICAL PLANS

SYMBOL SCHEDULE / NOTES
PHASE TWO - 3 BDRM / 2 BATH - RIGHT PARKING

YAVAPAI COUNTY, ARIZONA

1015 FAIR STREET
PRESCOTT, ARIZONA

SHEET NO:

E-1.0