

EXHIBIT G-2  
THIS REPORT PREPARED PURSUANT TO DUTY IMPOSED BY A.A.C. R13-10-104 (A)

ARIZONA DEPARTMENT OF PUBLIC SAFETY  
STANDARD QUALITY ASSURANCE PROCEDURES  
INTOXILYZER MODEL 8000  
STANDARD CALIBRATION CHECK PROCEDURE

QA SPECIALIST D. ASHBY #562 AGENCY YAVAPAI COUNTY SHERIFFS OFFICE  
DATE 6.25.08 TIME 0720

INTOXILYZER SERIAL # 80.001455 LOCATION BAGDAD SUBSTATION

- (✓) 1. Ensure that gas tank is attached to instrument and contains a standard alcohol concentration solution .1000 AC.  
OR  
Pour a standard alcohol concentration solution \_\_\_\_\_ AC, into a clean dry simulator and assemble the simulator. Ensure that a tight seal has been made. Turn on the simulator and allow temperature to reach  $34^{\circ}\text{C} \pm 0.2^{\circ}\text{C}$
- (✓) 2. Intoxilyzer 8000 display reads "PUSH BUTTON TO START"
- (✓) 3. Go to the "Control Testing Menu". Select "D" for dry control test or "W" for wet control test. After selection is made press ENTER.
- (✓) 4. Air blank completed.
- (✓) 5. Calibration check completed. Test results 0. 102 AC.
- (✓) 6. Air blank completed.
- (✓) 7. Remove printed record. Attach the record to the completed checklist.

SIGNATURE Deann I Ashby #562/QAS#33400

INTOXILYZER 8000

Location: YAVAPAI SO, BAGDAD

Serial Number: 80-001455

06/25/2008

07:26:38

-----  
Standard Lot#: 730901I

Last Changed By: C. KROGEDAL #6535  
-----

QAS: D. ASHBY #S62

YAVAPAI CSO  
-----

Test	g/210L	Time
Air Blank	0.000	07:27:06
Cal Check	0.102	07:27:25
Air Blank	0.000	07:27:54

  
-----  
Operator's Signature

EXHIBIT G-4  
THIS REPORT PREPARED PURSUANT TO DUTY IMPOSED BY A.A.C. R13-10-104 (A)

ARIZONA DEPARTMENT OF PUBLIC SAFETY

STANDARD QUALITY ASSURANCE PROCEDURES  
INTOXILYZER MODEL 8000

STANDARD QUALITY ASSURANCE PROCEDURE

QA SPECIALIST D. ASHBY #562 AGENCY YAVAPAI COUNTY S.O.

DATE 6-25-08 TIME 0734

INTOXILYZER SERIAL # 80-001455 LOCATION BAGDAD SUBSTATION

(✓) 1. Display Reads "PUSH BUTTON TO START"

DIAGNOSTIC TESTS

(✓) 1. Clock time check.

(✓) 2. Date check.

OPERATIONAL TESTS

(✓) 1. Alcohol-free subject test result 0. 00 AC.

(✓) 2. Error recognition logic system functioning.

Not a Successfully Completed Test Sequence printed

(✓) 3. Proper sample recognition system.

Not a Successfully Completed Test Sequence printed

Deficient sample printed.

(✓) 4. Standard Calibration Check standard 0. 1000 AC. Result 0. 102 AC.

Instrument is operating properly and accurately. YES  NO

COMMENTS

I did a second Push Start Button at Wrong Time  
because I forgot to blow during the first  
air blank (print out attached)

SIGNATURE Deann J Ashby #562/QAS# 33400

INTOXILYZER 8000  
Location: YAVAPAI SO, BAGDAD  
Serial Number : 80-001455  
06/25/2008

07:31:48

---

Standard Lot#: 730901I  
Last Changed By: C. KROGEDAL #6535  
QAS: D. ASHBY #S62  
YAVAPAI CSO

---

Operator: D. ASHBY #S62  
YAVAPAI CSO

---

Subject: SQAP,TEST  
DOB: 01/01/1999  
Sex: M Weight: 150

---

15 Minute Deprivation Period? Yes

---

Test	g/210L	Time
Air Blank	0.000	07:33:16
Diagnostic Test	Pass	07:33:44
Air Blank	0.000	07:34:11
0.100 Cal Check	0.102	07:34:30
Air Blank	0.000	07:34:59
Subject Test	0.000	07:35:18
Air Blank	0.000	07:35:45
Five Minute Wait	ABT*	
Air Blank	0.000	07:36:21

\*Sequence Aborted

Not a Successfully Completed Test Sequence

INTOXILYZER 8000  
Location: YAVAPAI SO, BAGDAD  
Serial Number : 80-001455  
06/25/2008

07:37:10

Standard Lot#: 730901I  
Last Changed By: C. KROGEDAL #6535

QAS: D. ASHBY #S62  
YAVAPAI CSO

Operator: D. ASHBY #S62  
YAVAPAI CSO

Subject: SQAP,TEST

DOB: 01/01/1999

Sex: M

Weight: 150

15 Minute Deprivation Period? Yes

Test	g/210L	Time
Air Blank	0.000	07:38:18
Diagnostic Test	Pass	07:38:45
Air Blank	0.000	07:39:12
0.100 Cal Check	0.102	07:39:31
Air Blank	0.000	07:40:01
Subject Test	0.000	07:40:55
Air Blank	0.000	07:41:22
Five Minute Wait	ABT*	
Air Blank	0.000	07:41:58

\*Sequence Aborted

Not a Successfully Completed Test Sequence

INTOXILYZER 8000  
Location: YAVAPAI SO, BAGDAD  
Serial Number : 80-001455  
06/25/2008

07:43:40

Standard Lot#: 730901I  
Last Changed By: C. KROGEDAL #6535  
QAS: D. ASHBY #S62  
YAVAPAI CSO

Operator: D. ASHBY #S62  
YAVAPAI CSO

Subject: SQAP, TET  
DOB: 01/01/1999  
Sex: M Weight: 150

15 Minute Deprivation Period? Yes

Test	g/210L	Time
Air Blank	RFI*	07:44:14
Air Blank	0.000	07:44:42

\*RFI Detect

Not a Successfully Completed Test Sequence

INTOXILYZER 8000

Location: YAVAPAI SO, BAGDAD

Serial Number : 80-001455

06/25/2008

07:42:03

Standard Lot#: 730901I

Last Changed By: C. KROGEDAL

#6535

QAS: D. ASHBY

#S62

YAVAPAI CSO

Operator: D. ASHBY

#S62

YAVAPAI CSO

Subject: SQAP,TEST

DOB: 01/01/1999

Sex: M

Weight: 150

15 Minute Deprivation Period? Yes

Test	g/210L	Time
Air Blank	IPS*	07:42:49
Air Blank	0.000	07:43:18

\*Improper Sample

**Not a Successfully Completed Test Sequence**

INTOXILYZER 8000  
Location: YAVAPAI SO, BAGDAD  
Serial Number : 80-001455  
06/25/2008

07:45:42

Standard Lot#: 730901I  
Last Changed By: C. KROGEDAL #6535

QAS: D. ASHBY #S62  
YAVAPAI CSO

Operator: D. ASHBY #S62  
YAVAPAI CSO

Subject: SQAP,TEST

DOB: 01/01/1999

Sex: M

Weight: 150

15 Minute Deprivation Period? Yes

Test	g/210L	Time
Air Blank	0.000	07:46:43
Diagnostic Test	Pass	07:47:10
Air Blank	0.000	07:47:37
0.100 Cal Check	0.101	07:47:56
Air Blank	0.000	07:48:26
Subject Test	0.208*	07:51:34
Air Blank	0.000	07:52:08
Air Blank	0.000	07:52:35
Subject Test	XXX**	07:53:03
Air Blank	0.000	07:53:40

\*Deficient Sample

\*\*Invalid Sample

Begin new deprivation period

Not a Successfully Completed Test Sequence

EXHIBIT G-2  
THIS REPORT PREPARED PURSUANT TO DUTY IMPOSED BY A.A.C. R13-10-104 (A)

ARIZONA DEPARTMENT OF PUBLIC SAFETY  
STANDARD QUALITY ASSURANCE PROCEDURES  
INTOXILYZER MODEL 8000

STANDARD CALIBRATION CHECK PROCEDURE

QA SPECIALIST D. ASHBY #562 AGENCY Yavapai County S.O.  
DATE 6-25-08 TIME 0800  
INTOXILYZER SERIAL # 80-001455 LOCATION Bagdad Substation

- (✓) 1. Ensure that gas tank is attached to instrument and contains a standard alcohol concentration solution • 1000 AC.  
OR  
Pour a standard alcohol concentration solution \_\_\_\_\_ AC, into a clean dry simulator and assemble the simulator. Ensure that a tight seal has been made. Turn on the simulator and allow temperature to reach  $34^{\circ}\text{C} \pm 0.2^{\circ}\text{C}$
- (✓) 2. Intoxilyzer 8000 display reads "PUSH BUTTON TO START"
- (✓) 3. Go to the "Control Testing Menu". Select "D" for dry control test or "W" for wet control test. After selection is made press ENTER.
- (✓) 4. Air blank completed.
- (✓) 5. Calibration check completed. Test results 0. 10.2 AC.
- (✓) 6. Air blank completed.
- (✓) 7. Remove printed record. Attach the record to the completed checklist.

SIGNATURE D. Ashby

INTOXILYZER 8000

Location: YAVAPAI SO, BAGDAD

Serial Number: 80-001455

06/25/2008

07:57:10

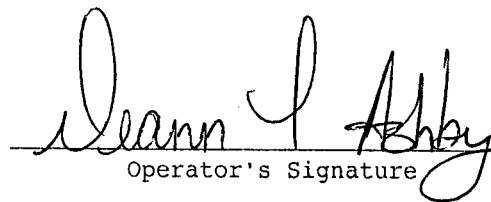
-----  
Standard Lot#: 730901I

Last Changed By: C. KROGEDAL #6535  
-----

QAS: D. ASHBY #S62

YAVAPAI CSO  
-----

Test	g/210L	Time
Air Blank	0.000	07:57:38
Cal Check	0.102	07:57:56
Air Blank	0.000	07:58:26

 #S62/QAS#33400  
Operator's Signature